



SPEC® CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Blade 1000

SPECint®2006 = --
SPECint_base2006 = 3.12

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2006
Hardware Availability: Nov-2001
Software Availability: May-2006

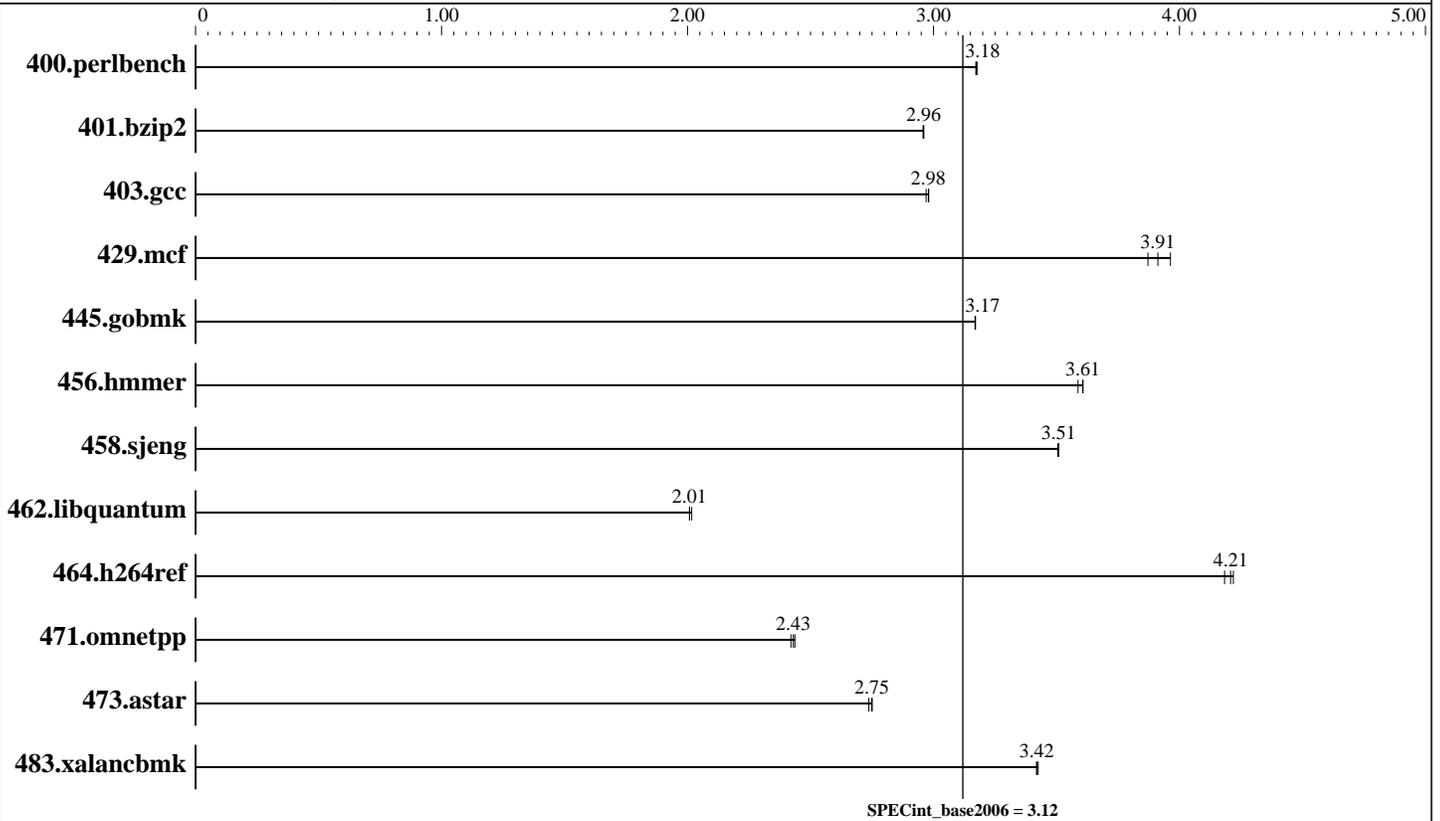

Hardware

CPU Name: UltraSPARC III Cu
 CPU Characteristics:
 CPU MHz: 900
 FPU: Integrated
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 64 KB D on chip per chip
 Secondary Cache: 8 MB I+D off chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (4-way interleaved)
 Disk Subsystem: 1x18GB 10K RPM for system
 1x36GB 10K RPM for SPEC
 Other Hardware: None

Software

Operating System: Solaris 10 1/06
 Compiler: Sun Studio 11 with patch 120760-03
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 1000

SPECint2006 = --
SPECint_base2006 = 3.12

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2006
Hardware Availability: Nov-2001
Software Availability: May-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>3077</u>	<u>3.18</u>	3076	3.18	3080	3.17						
401.bzip2	<u>3260</u>	<u>2.96</u>	3263	2.96	3260	2.96						
403.gcc	2711	2.97	2701	2.98	<u>2702</u>	<u>2.98</u>						
429.mcf	2356	3.87	<u>2331</u>	<u>3.91</u>	2301	3.96						
445.gobmk	3310	3.17	<u>3310</u>	<u>3.17</u>	3308	3.17						
456.hammer	2586	3.61	<u>2587</u>	<u>3.61</u>	2601	3.59						
458.sjeng	3452	3.50	<u>3449</u>	<u>3.51</u>	3449	3.51						
462.libquantum	<u>10318</u>	<u>2.01</u>	10319	2.01	10273	2.02						
464.h264ref	5246	4.22	5290	4.18	<u>5259</u>	<u>4.21</u>						
471.omnetpp	2565	2.44	<u>2572</u>	<u>2.43</u>	2582	2.42						
473.astar	2552	2.75	<u>2554</u>	<u>2.75</u>	2565	2.74						
483.xalancbmk	2014	3.43	2018	3.42	<u>2018</u>	<u>3.42</u>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Although two CPUs were enabled during testing, the SPEC CPU2006 benchmarks used only one CPU

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-g -fast -xpagesize=4M

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 1000

SPECint2006 = --
SPECint_base2006 = 3.12

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2006
Hardware Availability: Nov-2001
Software Availability: May-2006

Base Optimization Flags (Continued)

C++ benchmarks:
-g0 -library=stlport4 -fast -xpagesize=4M

Base Other Flags

C benchmarks:
-V
C++ benchmarks:
-verbose=version

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/sun-studio.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/sun-studio.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v90.
Report generated on Tue Jul 22 09:59:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 August 2006.