



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire E25K

SPECint®_rate2006 = 904 SPECint_rate_base2006 = 759

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Apr-2006

Hardware Availability: Oct-2005

Software Availability: Jun-2006

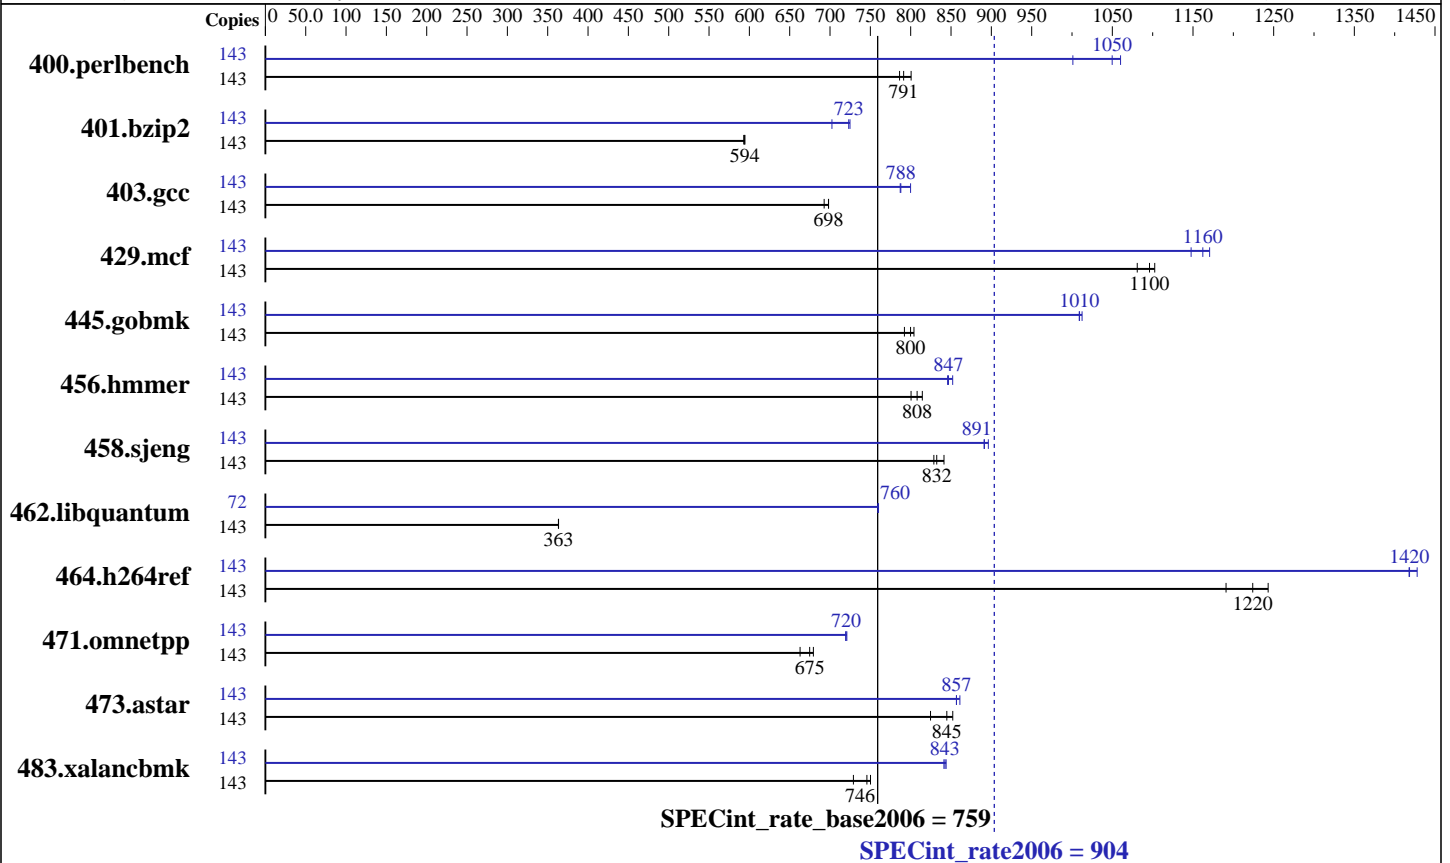

Hardware

CPU Name: UltraSPARC IV+
 CPU Characteristics:
 CPU MHz: 1500
 FPU: Integrated
 CPU(s) enabled: 144 cores, 72 chips, 2 cores/chip
 CPU(s) orderable: 4-72 chips (groups of 4)
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 304 GB, 16-way interleaved
 Disk Subsystem: System: Sun StorEdge D240 Media Tray (2x73GB)
 SPEC: StorEdge 6120 (14x73GB 10K FC-AL RAID5)
 Other Hardware: None

Software

Operating System: Solaris 10 6/06
 Compiler: Sun Studio 11 with patch 120760-03
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 904

SPECint_rate_base2006 = 759

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2006
Hardware Availability: Oct-2005
Software Availability: Jun-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	143	<u>1766</u>	<u>791</u>	1745	801	1777	786	143	1396	1000	1318	1060	<u>1331</u>	<u>1050</u>
401.bzip2	143	<u>2322</u>	<u>594</u>	2322	594	2327	593	143	1965	702	<u>1908</u>	<u>723</u>	1904	725
403.gcc	143	1649	698	1662	693	<u>1649</u>	<u>698</u>	143	1463	787	<u>1461</u>	<u>788</u>	1439	800
429.mcf	143	1207	1080	1183	1100	<u>1190</u>	<u>1100</u>	143	1136	1150	<u>1122</u>	<u>1160</u>	1114	1170
445.gobmk	143	<u>1875</u>	<u>800</u>	1866	804	1893	792	143	1482	1010	<u>1486</u>	<u>1010</u>	1487	1010
456.hammer	143	1638	814	<u>1651</u>	<u>808</u>	1667	800	143	1566	852	1577	846	<u>1575</u>	<u>847</u>
458.sjeng	143	2057	841	<u>2079</u>	<u>832</u>	2088	829	143	1931	896	<u>1941</u>	<u>891</u>	1942	891
462.libquantum	143	8153	363	8155	363	<u>8154</u>	<u>363</u>	72	1963	760	<u>1964</u>	<u>760</u>	1965	759
464.h264ref	143	2546	1240	2657	1190	<u>2585</u>	<u>1220</u>	143	2216	1430	<u>2231</u>	<u>1420</u>	2232	1420
471.omnetpp	143	1316	679	1348	663	<u>1324</u>	<u>675</u>	143	<u>1242</u>	<u>720</u>	1240	721	1242	719
473.astar	143	1178	852	1217	825	<u>1188</u>	<u>845</u>	143	1166	861	<u>1172</u>	<u>857</u>	1172	857
483.xalancbmk	143	1315	750	1353	729	<u>1323</u>	<u>746</u>	143	1169	844	<u>1171</u>	<u>843</u>	1173	841

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to all but one core using "submit" and "pbind". The SPEC toolset was bound to the remaining core (namely, processor 0 of the last system board).

```
ulimit -s 131072 (shell): increases stack
```

These shell commands request use of 4MB pages:

```
export LD_PRELOAD=mpss.so.1:$LD_PRELOAD
export MPSSHEAP=4MB
export MPSSSTACK=4MB
```

/etc/system parameters

```
maxphys=4194304
```

Defines the maximum size of I/O requests, in bytes.

```
maxpgio=1024
```

Defines the maximum number of page I/O requests that can be queued by the paging system.

```
tune_t_fsflushr=1
```

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

```
autoup=60
```

Causes pages older than the listed number of seconds to be written by fsflush.

```
bufhwm=3000
```

Memory byte limit for caching I/O buffers

```
segmap_percent=1
```

Set maximum percent memory for file system cache



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 904
SPECint_rate_base2006 = 759

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2006
Hardware Availability: Oct-2005
Software Availability: Jun-2006

Platform Notes

The tested system had 18 system boards. The first 17 system boards were equipped with 16GB of memory; the last system board had 32GB. All memory was 16-way interleaved.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -l12amm

C++ benchmarks:
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch_level=1
-xdepend -xalias_level=compatible -l12amm -lfast

Base Other Flags

C benchmarks:
-xjobs=14 -V -#

C++ benchmarks:
-xjobs=14 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:
cc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 904

SPECint_rate_base2006 = 759

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2006
Hardware Availability: Oct-2005
Software Availability: Jun-2006

Peak Compiler Invocation (Continued)

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M
-xalias_level=std -Xc -xipo=2 -lfast

401.bzip2: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M
-xalias_level=strong

403.gcc: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xipo=2
-xalias_level=std -xprefetch_level=2 -ll2amm

429.mcf: -g -fast -xpagesize=4M -xprefetch_level=2 -xrestrict
-xalias_level=std -lfast

445.gobmk: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M
-xalias_level=std -xrestrict

456.hmmer: -g -fast -xpagesize=4M -xipo=2 -xalias_level=strong

458.sjeng: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xipo=2

462.libquantum: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M
-xprefetch_level=2

464.h264ref: -g -xprofile=collect:./fb(pass 1)
-xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xipo=2
-xalias_level=std -ll2amm

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 904
SPECint_rate_base2006 = 759

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2006
Hardware Availability: Oct-2005
Software Availability: Jun-2006

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -g0 -library=stlport4 -xprofile=collect:./fb(pass 1)
             -xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xdepend
             -xalias_level=compatible -xipo=2 -Qoption cg -Qlp-av=0
             -xprefetch_level=2 -lfast

473.astar: -g0 -library=stlport4 -xprofile=collect:./fb(pass 1)
           -xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xdepend
           -xalias_level=compatible -xipo=2 -xprefetch_level=2
           -xprefetch_auto_type=indirect_array_access -lfast

483.xalancbmk: -g0 -library=stlport4 -xprofile=collect:./fb(pass 1)
              -xprofile=use:./fb(pass 2) -fast -xpagesize=4M -xdepend
              -xalias_level=compatible -xprefetch_level=2
```

Peak Other Flags

C benchmarks:
-xjobs=14 -V -#

C++ benchmarks:
-xjobs=14 -verbose=diags,version

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/sun-studio.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/sun-studio.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v90.
Report generated on Tue Jul 22 09:58:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 August 2006.