



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint®\_rate2006 = 1650**

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

**SPECint\_rate\_base2006 = 1530**

CPU2006 license: 03


Test date: Aug-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

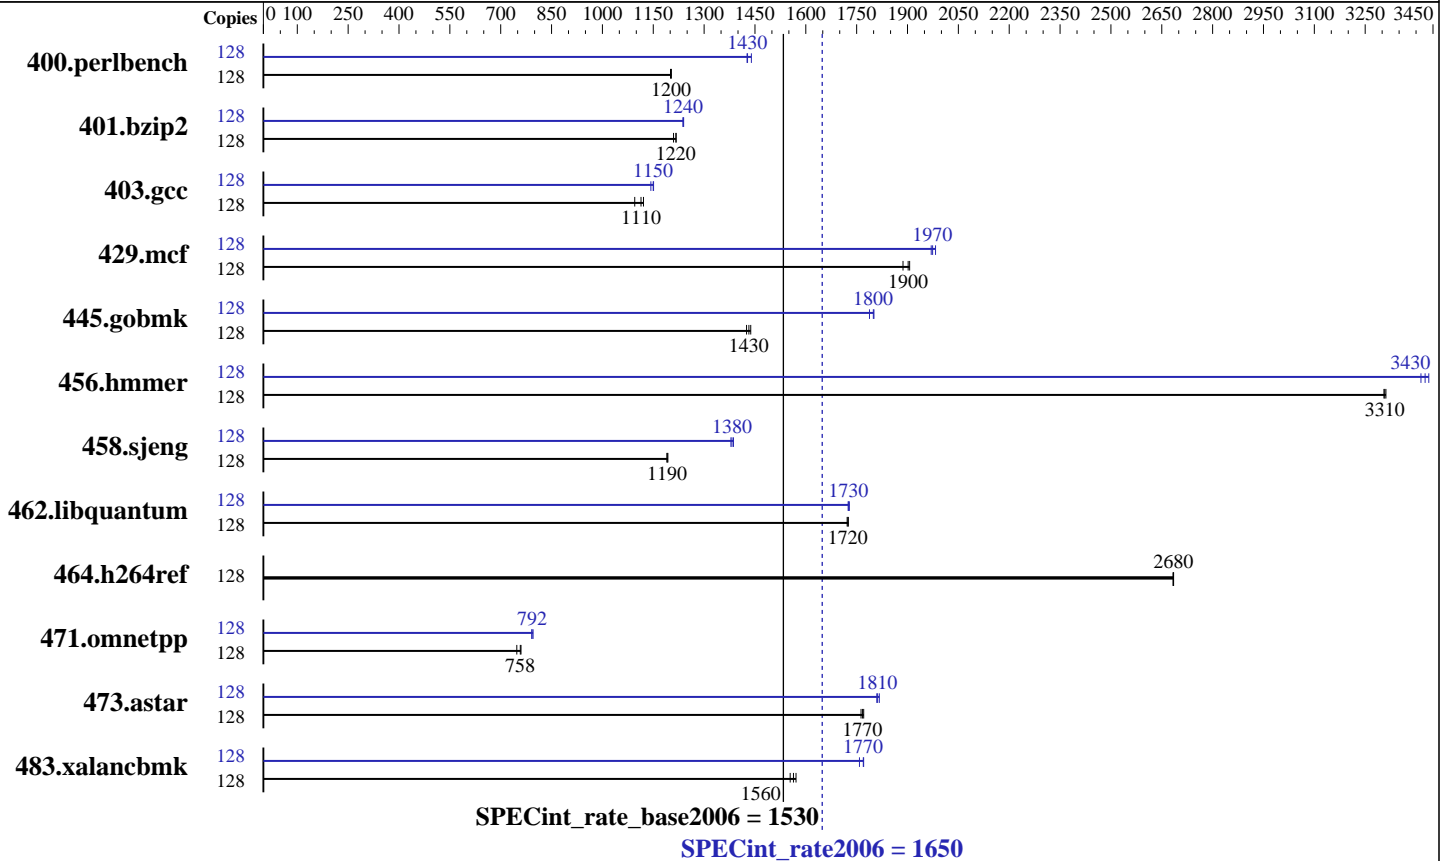

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9050  
 CPU Characteristics: 1.6GHz/24MB, 533MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 128 cores, 64 chips, 2 cores/chip  
 CPU(s) orderable: 1-64 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core  
 L3 Cache: 12 MB I+D on chip per core  
 Other Cache: None  
 Memory: 512 GB (512x1GB DIMMs)  
 Disk Subsystem: 3x73GB 15K RPM SCSI (striped)  
 Other Hardware: None

### Software

Operating System: HPUX11i-TCOE B.11.23.0609  
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill Smartheap 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint\_rate2006 = 1650

SPECint\_rate\_base2006 = 1530

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1041	1200	<b>1040</b>	<b>1200</b>	1039	1200	128	869	1440	<b>876</b>	<b>1430</b>	877	1430
401.bzip2	128	<b>1015</b>	<b>1220</b>	1015	1220	1021	1210	128	998	1240	996	1240	<b>998</b>	<b>1240</b>
403.gcc	128	919	1120	<b>925</b>	<b>1110</b>	941	1100	128	895	1150	<b>896</b>	<b>1150</b>	902	1140
429.mcf	128	<b>614</b>	<b>1900</b>	612	1910	619	1890	128	593	1970	589	1980	<b>591</b>	<b>1970</b>
445.gobmk	128	934	1440	942	1430	<b>938</b>	<b>1430</b>	128	<b>746</b>	<b>1800</b>	746	1800	751	1790
456.hammer	128	361	3310	<b>361</b>	<b>3310</b>	361	3310	128	347	3440	350	3410	<b>349</b>	<b>3430</b>
458.sjeng	128	1298	1190	<b>1300</b>	<b>1190</b>	1301	1190	128	1117	1390	<b>1120</b>	<b>1380</b>	1123	1380
462.libquantum	128	1537	1730	<b>1538</b>	<b>1720</b>	1540	1720	128	1534	1730	1537	1730	<b>1537</b>	<b>1730</b>
464.h264ref	128	1056	2680	1055	2680	<b>1055</b>	<b>2680</b>	128	1056	2680	1055	2680	<b>1055</b>	<b>2680</b>
471.omnetpp	128	1053	760	<b>1056</b>	<b>758</b>	1070	748	128	1006	796	1011	792	<b>1010</b>	<b>792</b>
473.astar	128	510	1760	<b>508</b>	<b>1770</b>	507	1770	128	495	1820	<b>496</b>	<b>1810</b>	497	1810
483.xalancbmk	128	<b>565</b>	<b>1560</b>	568	1550	562	1570	128	499	1770	<b>499</b>	<b>1770</b>	502	1760

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```

## Platform Notes

The system was configured as a single partition with 16 cells and 4 processors (8 cores) per cell. Memory was configured as 50% local and 50% interleaved.

The following config file entry was used to bind

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

HP Integrity Superdome (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECint\_rate2006 = 1650**

**SPECint\_rate\_base2006 = 1530**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2006

**Hardware Availability:** Sep-2006

**Software Availability:** Sep-2006

## Platform Notes (Continued)

processes to cells using the HP-UX "mpsched" utility:  
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDM \$command

## Base Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64  
403.gcc: -DSPEC\_CPU\_HPUX  
462.libquantum: -DSPEC\_CPU\_HPUX  
483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Base Optimization Flags

C benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N

C++ benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmarheap.a

## Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64  
403.gcc: -DSPEC\_CPU\_HPUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint\_rate2006 = 1650

SPECint\_rate\_base2006 = 1530

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_HPUX  
483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

**SPECint\_rate2006 = 1650**

**SPECint\_rate\_base2006 = 1530**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2006

**Hardware Availability:** Sep-2006

**Software Availability:** Sep-2006

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 09:56:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 September 2006.