



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®2006 = 15.1

HP Integrity rx4640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint\_base2006 = 13.8

CPU2006 license: 03


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

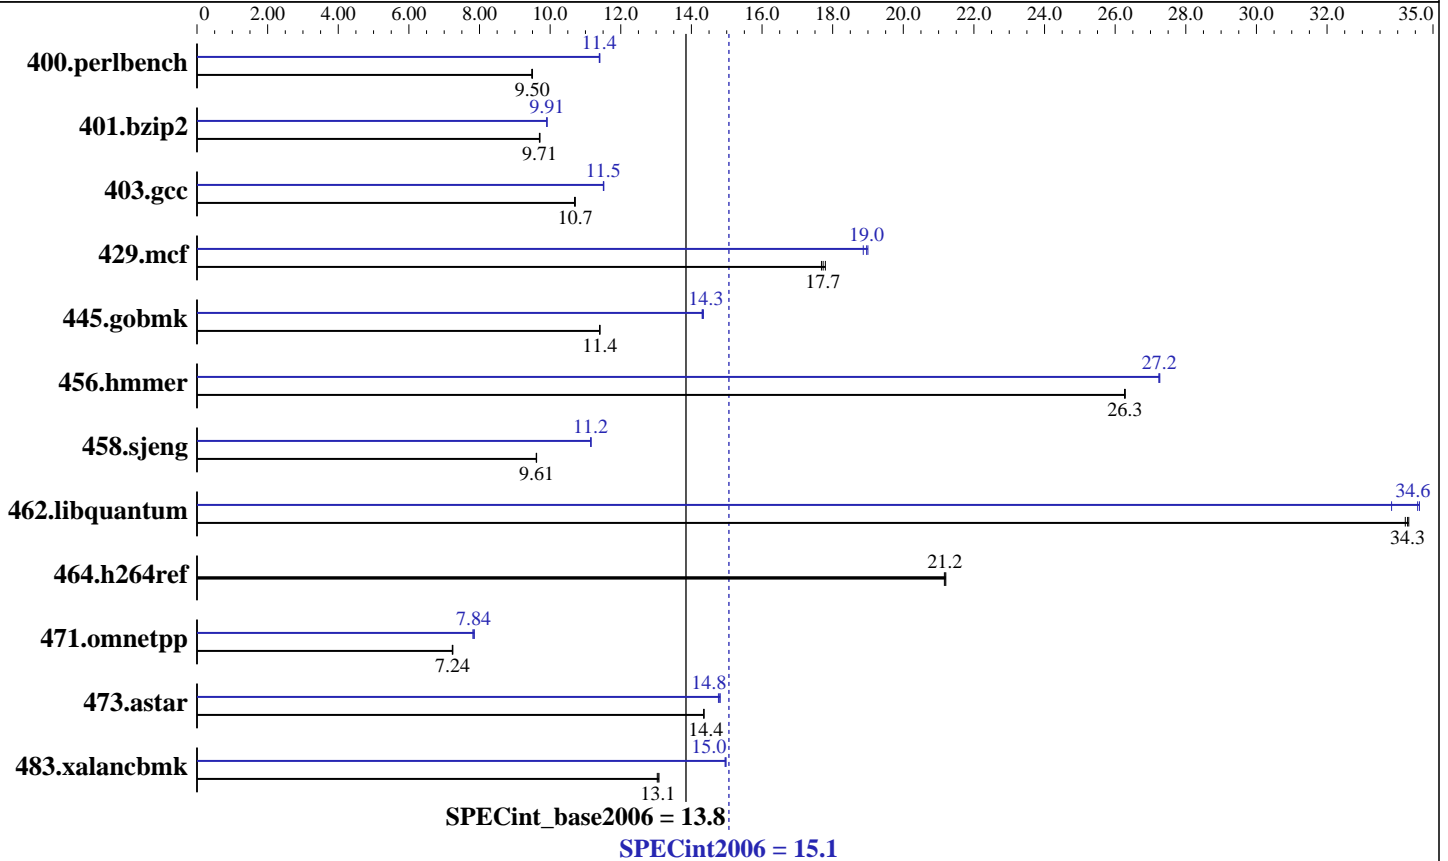

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9050  
 CPU Characteristics: 1.6GHz/24MB, 400MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1-4 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core  
 L3 Cache: 12 MB I+D on chip per core  
 Other Cache: None  
 Memory: 32 GB (16x2GB DIMMs)  
 Disk Subsystem: 36GB 15K RPM SCSI  
 Other Hardware: None

### Software

Operating System: HPUX11i-TCOE B.11.23.0609  
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill Smartheap 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

SPECint2006 = 15.1

SPECint\_base2006 = 13.8

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1031	9.48	1028	9.50	<b>1029</b>	<b>9.50</b>	856	11.4	858	11.4	<b>857</b>	<b>11.4</b>
401.bzip2	995	9.70	<b>994</b>	<b>9.71</b>	994	9.71	974	9.91	<b>974</b>	<b>9.91</b>	974	9.91
403.gcc	753	10.7	<b>752</b>	<b>10.7</b>	752	10.7	699	11.5	700	11.5	<b>699</b>	<b>11.5</b>
429.mcf	513	17.8	516	17.7	<b>514</b>	<b>17.7</b>	483	18.9	<b>481</b>	<b>19.0</b>	480	19.0
445.gobmk	920	11.4	<b>920</b>	<b>11.4</b>	919	11.4	733	14.3	<b>733</b>	<b>14.3</b>	731	14.3
456.hammer	355	26.3	<b>355</b>	<b>26.3</b>	355	26.3	343	27.2	342	27.3	<b>342</b>	<b>27.2</b>
458.sjeng	1258	9.62	1260	9.61	<b>1259</b>	<b>9.61</b>	1084	11.2	<b>1085</b>	<b>11.2</b>	1085	11.2
462.libquantum	604	34.3	606	34.2	<b>604</b>	<b>34.3</b>	613	33.8	599	34.6	<b>599</b>	<b>34.6</b>
464.h264ref	1046	21.2	<b>1045</b>	<b>21.2</b>	1044	21.2	1046	21.2	<b>1045</b>	<b>21.2</b>	1044	21.2
471.omnetpp	865	7.23	<b>864</b>	<b>7.24</b>	863	7.25	800	7.81	<b>798</b>	<b>7.84</b>	796	7.85
473.astar	489	14.4	489	14.4	<b>489</b>	<b>14.4</b>	475	14.8	474	14.8	<b>474</b>	<b>14.8</b>
483.xalancbmk	529	13.0	527	13.1	<b>528</b>	<b>13.1</b>	461	15.0	461	15.0	<b>461</b>	<b>15.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECint2006 = 15.1**

**SPECint\_base2006 = 13.8**

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2006

**Hardware Availability:** Sep-2006

**Software Availability:** Sep-2006

## Platform Notes

The "cpuconfig" EFI command was used prior to booting to deconfigure processors.

Although two cores were enabled during testing, the SPEC CPU2006 benchmarks used only one core.

## Base Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -Ae`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_HPUX_IA64`

403.gcc: `-DSPEC_CPU_HPUX`

462.libquantum: `-DSPEC_CPU_HPUX`

483.xalancbmk: `-DSPEC_CPU_HPUX_IA64`

## Base Optimization Flags

C benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

C++ benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

`/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a`

## Peak Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -Ae`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 15.1**

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECint\_base2006 = 13.8**

**CPU2006 license:** 03

**Test date:** Sep-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64  
403.gcc: -DSPEC\_CPU\_HPUX  
462.libquantum: -DSPEC\_CPU\_HPUX  
483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

SPECint2006 = 15.1

SPECint\_base2006 = 13.8

**CPU2006 license:** 03

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2006

**Hardware Availability:** Sep-2006

**Software Availability:** Sep-2006

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:07:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 October 2006.