



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 824

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 770

CPU2006 license: 03


Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

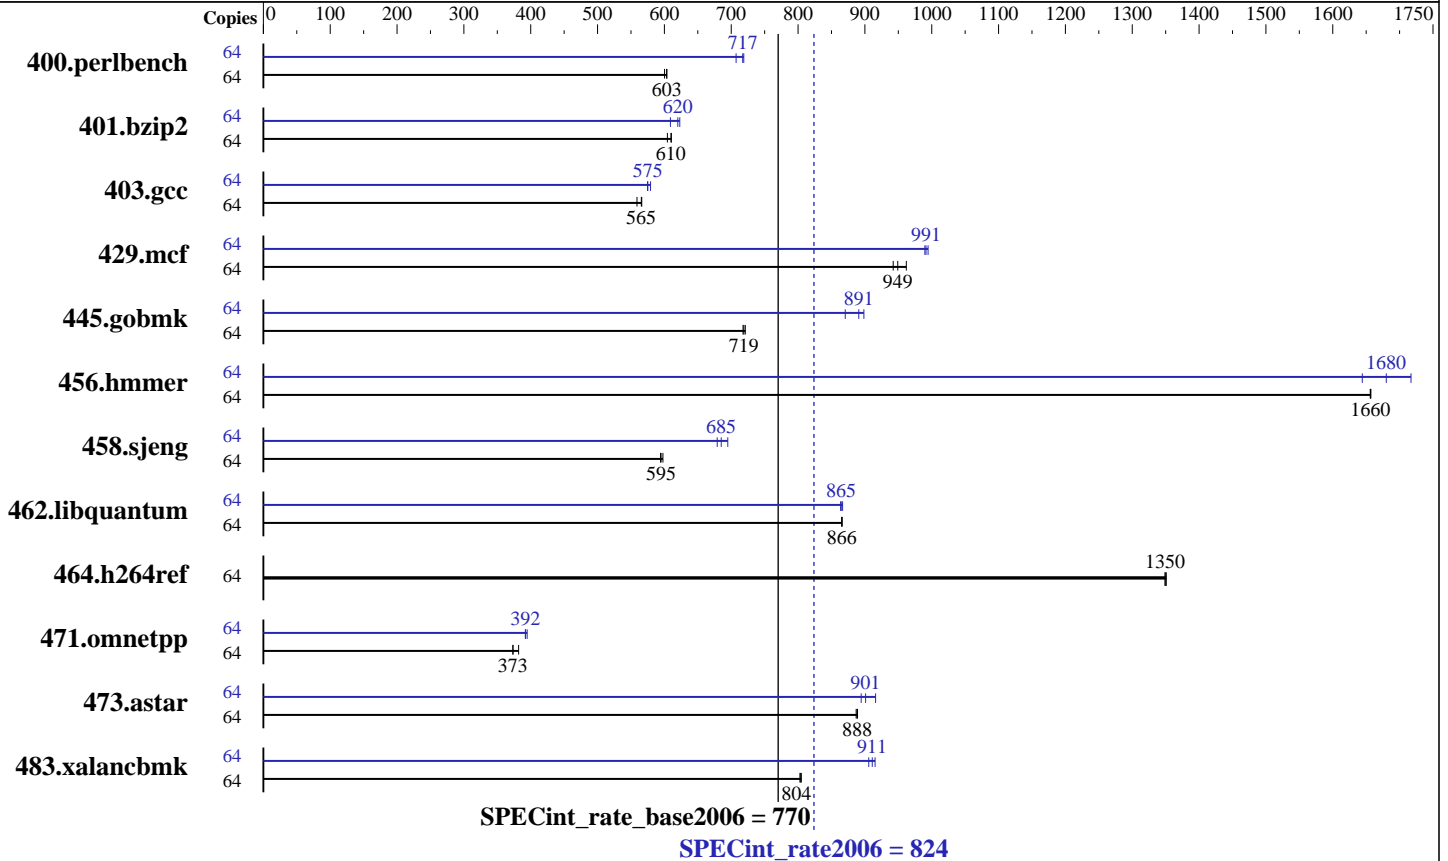

Hardware

CPU Name: Dual-Core Intel Itanium 2 9050
 CPU Characteristics: 1.6GHz/24MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip
 CPU(s) orderable: 1-64 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core
 L3 Cache: 12 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (256x1GB DIMMs)
 Disk Subsystem: 3x73GB 15K RPM SCSI (striped)
 Other Hardware: None

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill Smartheap 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 824

SPECint_rate_base2006 = 770

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<u>1036</u>	<u>603</u>	1042	600	1036	604	64	870	719	884	707	<u>872</u>	<u>717</u>
401.bzip2	64	1022	604	1012	610	<u>1013</u>	<u>610</u>	64	<u>996</u>	<u>620</u>	1014	609	991	623
403.gcc	64	910	566	<u>911</u>	<u>565</u>	922	559	64	<u>896</u>	<u>575</u>	889	579	896	575
429.mcf	64	607	962	619	942	<u>615</u>	<u>949</u>	64	<u>589</u>	<u>991</u>	587	995	590	990
445.gobmk	64	931	721	935	718	<u>934</u>	<u>719</u>	64	<u>754</u>	<u>891</u>	771	871	747	898
456.hammer	64	360	1660	361	1660	<u>360</u>	<u>1660</u>	64	363	1640	<u>355</u>	<u>1680</u>	348	1720
458.sjeng	64	1295	598	<u>1301</u>	<u>595</u>	1303	594	64	<u>1130</u>	<u>685</u>	1140	679	1114	695
462.libquantum	64	<u>1532</u>	<u>866</u>	1532	866	1532	865	64	1530	867	1535	864	<u>1534</u>	<u>865</u>
464.h264ref	64	1048	1350	1050	1350	<u>1050</u>	<u>1350</u>	64	1048	1350	1050	1350	<u>1050</u>	<u>1350</u>
471.omnetpp	64	1047	382	1071	373	<u>1071</u>	<u>373</u>	64	1014	395	<u>1020</u>	<u>392</u>	1021	392
473.aster	64	505	889	<u>506</u>	<u>888</u>	507	887	64	490	916	502	894	<u>499</u>	<u>901</u>
483.xalancbmk	64	549	805	<u>549</u>	<u>804</u>	550	803	64	483	915	488	906	<u>485</u>	<u>911</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 824

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 770

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Platform Notes

The system was configured as a single partition with 8 cells and 4 processors (8 cores) per cell. Memory was configured as 50% local and 50% interleaved.

The following config file entry was used to bind processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDM \$command

Base Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

C++ benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a

Peak Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 824

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 770

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity Superdome (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 824

SPECint_rate_base2006 = 770

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:07:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.