



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 1590

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 1480

CPU2006 license: 03


Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

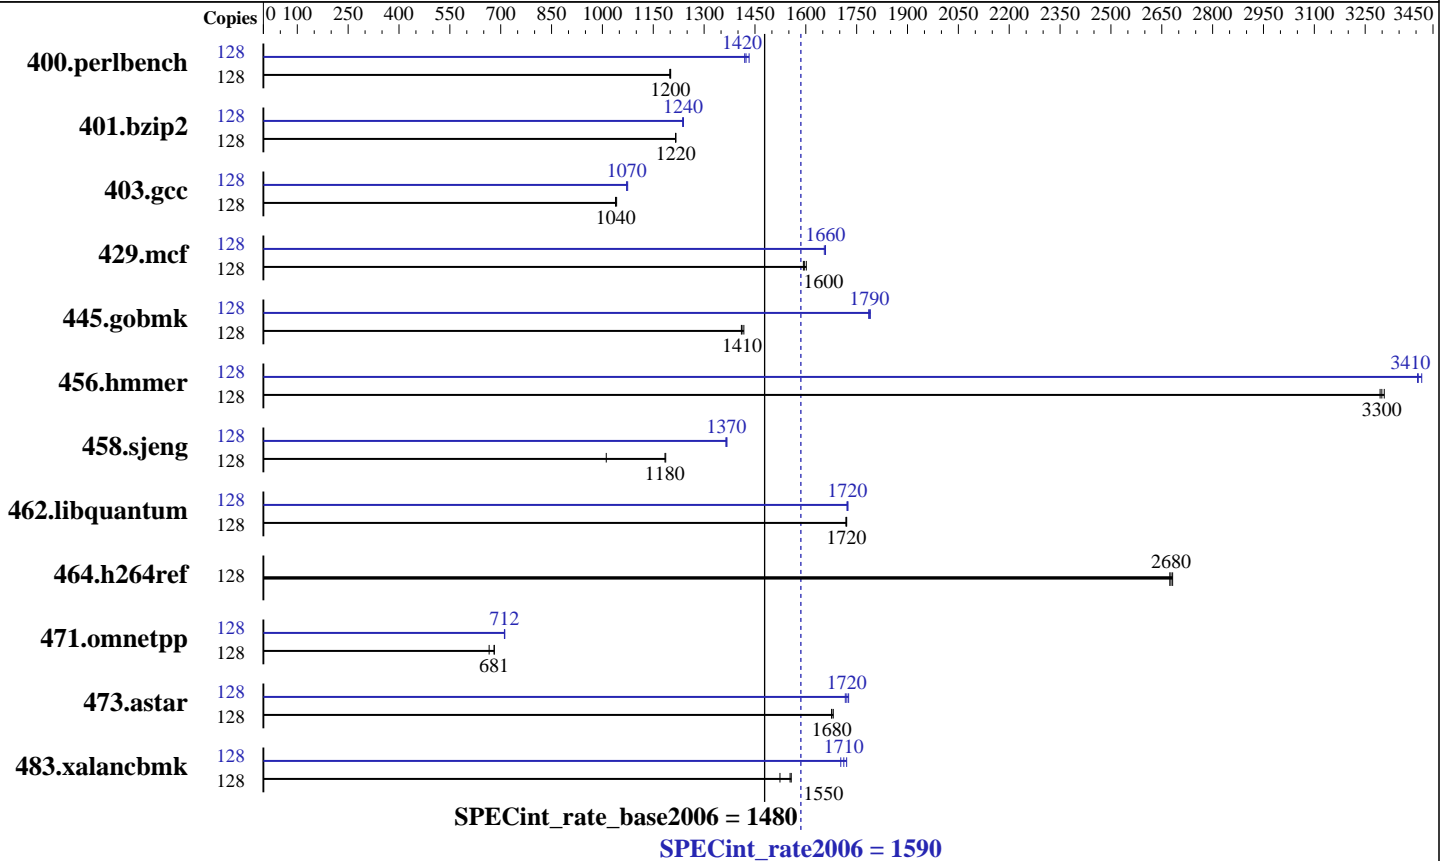

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 128 cores, 64 chips, 2 cores/chip
 CPU(s) orderable: 1-64 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core
 L3 Cache: 9 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (512x1GB DIMMs)
 Disk Subsystem: 3x73GB 15K RPM SCSI (striped)
 Other Hardware: None

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill Smartheap 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1590

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 1480

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1043	1200	1041	1200	1042	1200	128	873	1430	878	1420	881	1420
401.bzip2	128	1016	1220	1015	1220	1016	1220	128	998	1240	999	1240	997	1240
403.gcc	128	989	1040	991	1040	992	1040	128	961	1070	959	1070	961	1070
429.mcf	128	729	1600	733	1590	732	1600	128	704	1660	704	1660	706	1650
445.gobmk	128	947	1420	952	1410	951	1410	128	751	1790	752	1790	750	1790
456.hammer	128	362	3300	363	3290	361	3310	128	351	3400	350	3420	351	3410
458.sjeng	128	1305	1190	1531	1010	1307	1180	128	1134	1370	1135	1360	1133	1370
462.libquantum	128	1542	1720	1541	1720	1543	1720	128	1541	1720	1538	1720	1539	1720
464.h264ref	128	1059	2670	1056	2680	1058	2680	128	1059	2670	1056	2680	1058	2680
471.omnetpp	128	1201	666	1175	681	1175	681	128	1125	711	1124	712	1124	712
473.astar	128	535	1680	536	1680	536	1680	128	521	1730	523	1720	522	1720
483.xalancbmk	128	568	1550	580	1520	567	1560	128	519	1700	513	1720	516	1710

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1590

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 1480

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Platform Notes

The system was configured as a single partition with 16 cells and 4 processors (8 cores) per cell. Memory was configured as 50% local and 50% interleaved.

The following config file entry was used to bind processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDOM \$command

Base Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

C++ benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

Peak Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1590

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 1480

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmarheap.a



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1590

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 1480

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.11.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.11.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:10:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2006.