



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 54.7

HP Integrity rx4640
(1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 53.2

CPU2006 license: 03


Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

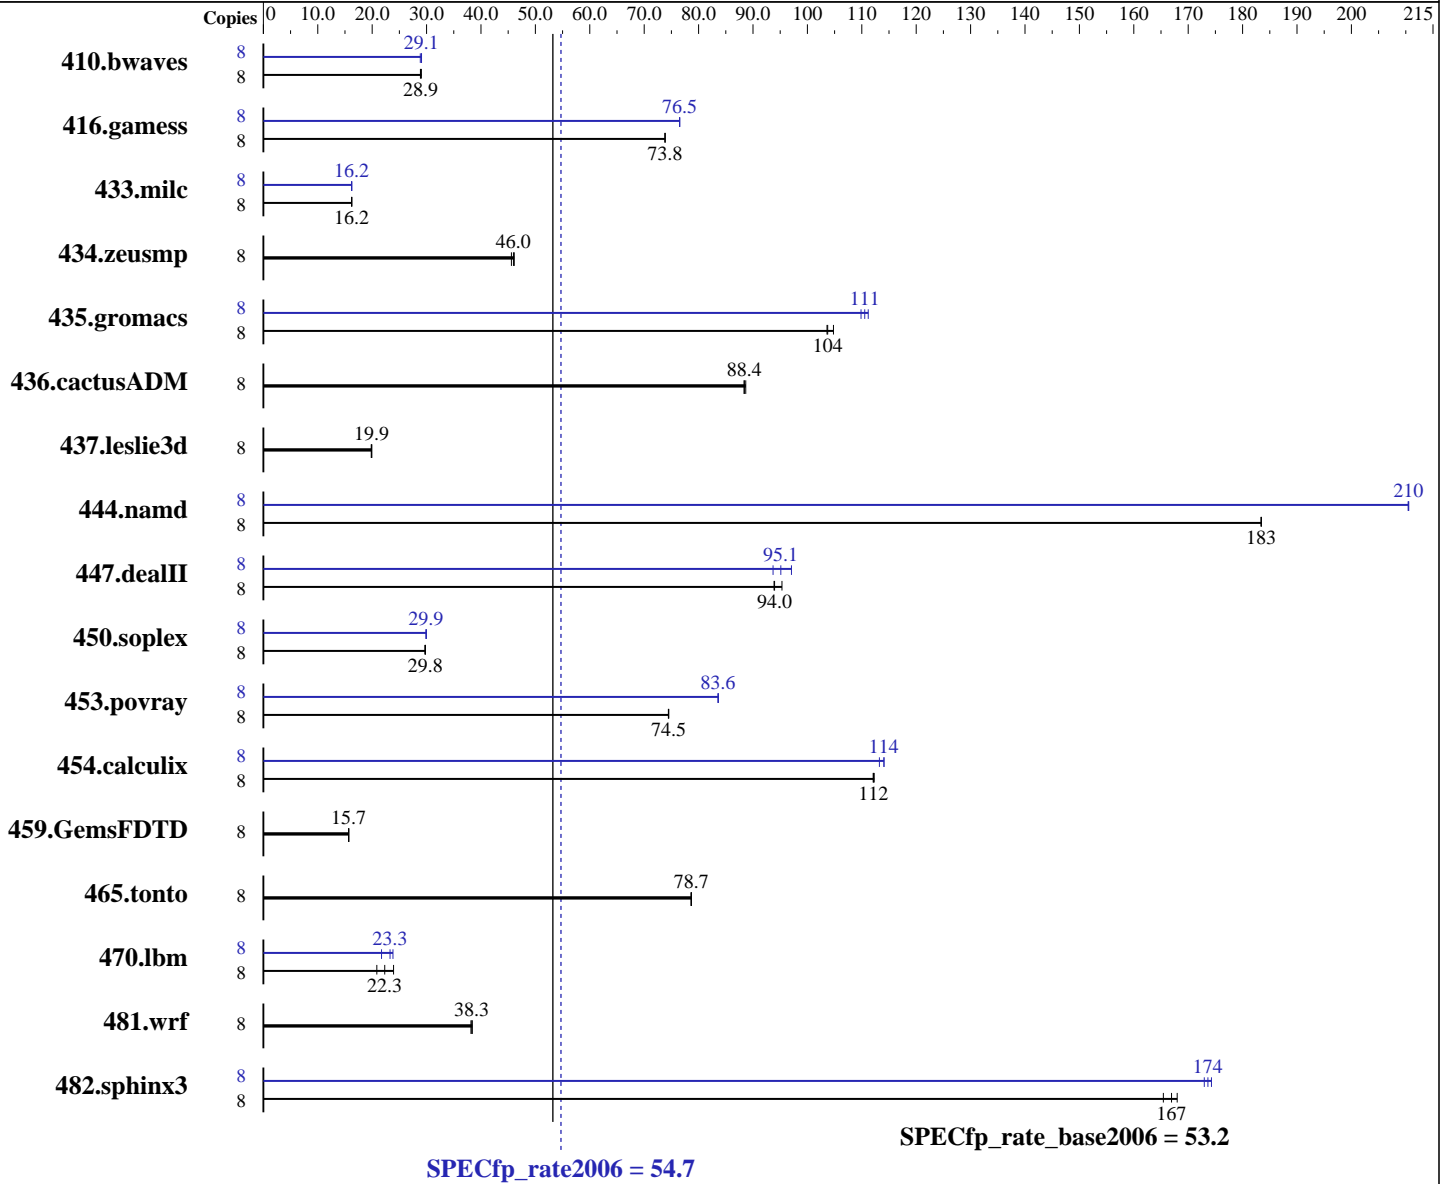

Hardware

CPU Name: Dual-Core Intel Itanium 2 9050
 CPU Characteristics: 1.6GHz/24MB, 400MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1-4 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux AS release 4 (Update 4)
 Compiler: Intel C++ Compiler for Itanium version 9.1 (Build 20060818)
 Intel Fortran90 Compiler for Itanium version 9.1 (Build 20060818)
 Auto Parallel: No
 File System: ext3
 System State: Multi-user
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 54.7

HP Integrity rx4640
(1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 53.2

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

L3 Cache: 12 MB I+D on chip per core
Other Cache: None
Memory: 32 GB (16x2GB DIMMs)
Disk Subsystem: 36GB 15K RPM SCSI
Other Hardware: None

Peak Pointers: 64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3758	28.9	3766	28.9	3744	29.0	8	3740	29.1	3769	28.8	3742	29.1
416.gamess	8	2121	73.8	2121	73.8	2122	73.8	8	2047	76.5	2047	76.5	2047	76.5
433.milc	8	4520	16.2	4528	16.2	4522	16.2	8	4525	16.2	4521	16.2	4528	16.2
434.zeusmp	8	1597	45.6	1584	46.0	1579	46.1	8	1597	45.6	1584	46.0	1579	46.1
435.gromacs	8	551	104	551	104	545	105	8	514	111	517	111	520	110
436.cactusADM	8	1082	88.4	1078	88.7	1081	88.4	8	1082	88.4	1078	88.7	1081	88.4
437.leslie3d	8	3793	19.8	3774	19.9	3779	19.9	8	3793	19.8	3774	19.9	3779	19.9
444.namd	8	350	183	350	183	350	183	8	305	210	305	210	305	211
447.dealII	8	975	93.9	960	95.3	974	94.0	8	977	93.7	943	97.1	962	95.1
450.soplex	8	2239	29.8	2248	29.7	2239	29.8	8	2231	29.9	2231	29.9	2226	30.0
453.povray	8	571	74.5	572	74.4	571	74.5	8	509	83.6	509	83.6	509	83.6
454.calculix	8	589	112	588	112	588	112	8	579	114	579	114	583	113
459.GemsFDTD	8	5413	15.7	5410	15.7	5412	15.7	8	5413	15.7	5410	15.7	5412	15.7
465.tonto	8	1002	78.6	1000	78.7	1000	78.7	8	1002	78.6	1000	78.7	1000	78.7
470.lbm	8	5271	20.9	4927	22.3	4593	23.9	8	5061	21.7	4721	23.3	4614	23.8
481.wrf	8	2342	38.2	2327	38.4	2332	38.3	8	2342	38.2	2327	38.4	2332	38.3
482.sphinx3	8	934	167	942	165	928	168	8	895	174	898	174	902	173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

stacksize set to unlimited prior to run

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 54.7

HP Integrity rx4640
(1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 53.2

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -IPF_fp_relaxed -ansi-alias

C++ benchmarks:

-fast -IPF_fp_relaxed -ansi-alias

Fortran benchmarks:

-fast -IPF_fp_relaxed

Benchmarks using both Fortran and C:

-fast -IPF_fp_relaxed -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 54.7

HP Integrity rx4640
(1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 53.2

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF_fp_relaxed -ansi-alias -fno-alias

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

482.sphinx3: Same as 470.lbm

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-no-prefetch -fno-alias

447.dealII: -fast -IPF_fp_relaxed -ansi-alias -no-alias-args

450.soplex: -fast -IPF_fp_relaxed -ansi-alias -inline-factor=150

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

Fortran benchmarks:

410.bwaves: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed

416.gamess: -fast -IPF_fp_relaxed -inline-factor=150

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 54.7

HP Integrity rx4640
(1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 53.2

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-fno-alias -inline-factor=150

436.cactusADM: basepeak = yes

454.calculix: -fast -IPF_fp_relaxed -fno-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/IPF_intel91_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/IPF_intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:04:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 November 2006.