



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 34.3

NovaScale B280 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 20


Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

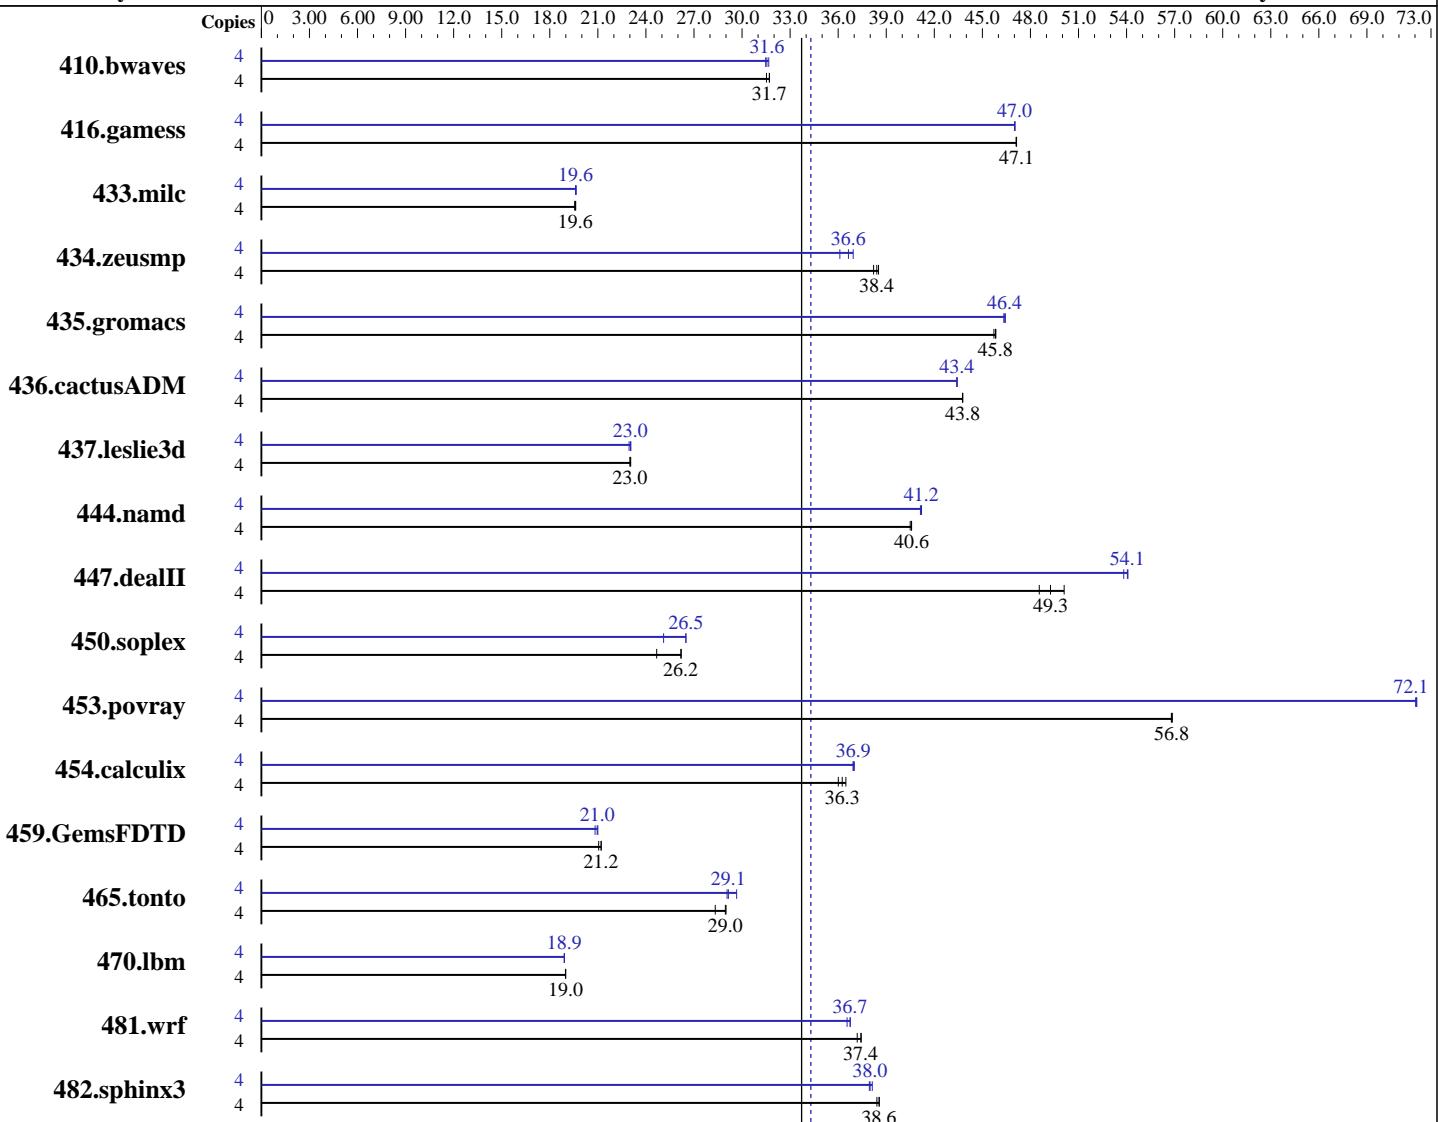

SPECfp_rate_base2006 = 33.7;

SPECfp_rate2006 = 34.3

Hardware

CPU Name: Intel Xeon 5130
CPU Characteristics: 2.0 GHz, 4MB L2, 1333MHz bus
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1 to 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip

Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits)
Service Pack1
Compiler: Intel C++ Compiler for IA32 version 9.1
Package ID W_CC_C_9.1.033 Build no 20061103Z
Intel Fortran Compiler for IA32 version 9.1
Package ID W_FC_C_9.1.033 Build no 20061103Z
Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel: No
File System: NTFS
System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 34.3

NovaScale B280 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

L3 Cache: None
 Other Cache: None
 Memory: 8 GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
 Disk Subsystem: 73 GB SAS, 10000RPM
 Other Hardware: None

Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shlw32M.lib)

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1715	31.7	1714	31.7	1724	31.5	4	1717	31.7	1723	31.6	1727	31.5
416.gamess	4	1663	47.1	1662	47.1	1662	47.1	4	1665	47.0	1666	47.0	1665	47.0
433.milc	4	1878	19.6	1872	19.6	1873	19.6	4	1869	19.6	1871	19.6	1873	19.6
434.zeusmp	4	953	38.2	948	38.4	945	38.5	4	1008	36.1	993	36.6	985	36.9
435.gromacs	4	625	45.7	623	45.8	623	45.8	4	616	46.3	616	46.4	615	46.4
436.cactusADM	4	1092	43.8	1092	43.8	1092	43.8	4	1101	43.4	1101	43.4	1101	43.4
437.leslie3d	4	1631	23.1	1634	23.0	1634	23.0	4	1638	22.9	1630	23.1	1632	23.0
444.namd	4	792	40.5	790	40.6	791	40.6	4	780	41.1	779	41.2	779	41.2
447.dealII	4	929	49.3	913	50.1	943	48.6	4	847	54.1	846	54.1	850	53.8
450.soplex	4	1352	24.7	1274	26.2	1273	26.2	4	1329	25.1	1259	26.5	1259	26.5
453.povray	4	375	56.8	374	56.9	375	56.8	4	295	72.0	295	72.1	295	72.1
454.calculix	4	910	36.3	916	36.0	905	36.5	4	892	37.0	893	36.9	894	36.9
459.GemsFDTD	4	2016	21.1	2001	21.2	2002	21.2	4	2038	20.8	2021	21.0	2025	21.0
465.tonto	4	1357	29.0	1389	28.3	1359	29.0	4	1327	29.7	1354	29.1	1350	29.1
470.lbm	4	2896	19.0	2894	19.0	2894	19.0	4	2906	18.9	2906	18.9	2907	18.9
481.wrf	4	1201	37.2	1194	37.4	1193	37.4	4	1222	36.6	1216	36.8	1216	36.7
482.sphinx3	4	2029	38.4	2022	38.6	2022	38.6	4	2055	37.9	2052	38.0	2045	38.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

 icl -Qvc7.1 -Qc99

C++ benchmarks:

 icl -Qvc7.1

Fortran benchmarks:

 ifort

Benchmarks using both Fortran and C:

 icl -Qvc7.1 -Qc99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 34.3

NovaScale B280 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

Base Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore
 444.namd: -TP
 447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
   -DBOOST_NO_INTRINSIC_WCHAR_T
 453.povray: -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
 481.wrf: -DSPEC_CPU_WINDOWS_ICL
```

Base Optimization Flags

C benchmarks:

```
-fast /F9500000000 shlw32m.lib           -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-fast -Qcxx_features /F9500000000 shlw32m.lib
   -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-fast /F9500000000           -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
-fast /F9500000000           -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc7.1 -Qc99 ifort
```

Peak Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore
 444.namd: -TP
 447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
   -DBOOST_NO_INTRINSIC_WCHAR_T
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 34.3

NovaScale B280 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features  
/F9500000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000  
-link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000  
-link /FORCE:MULTIPLE
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:16:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2007.