



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355,
2.66 GHz

SPECfp®_rate2006 = 60.2

SPECfp_rate_base2006 = 58.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

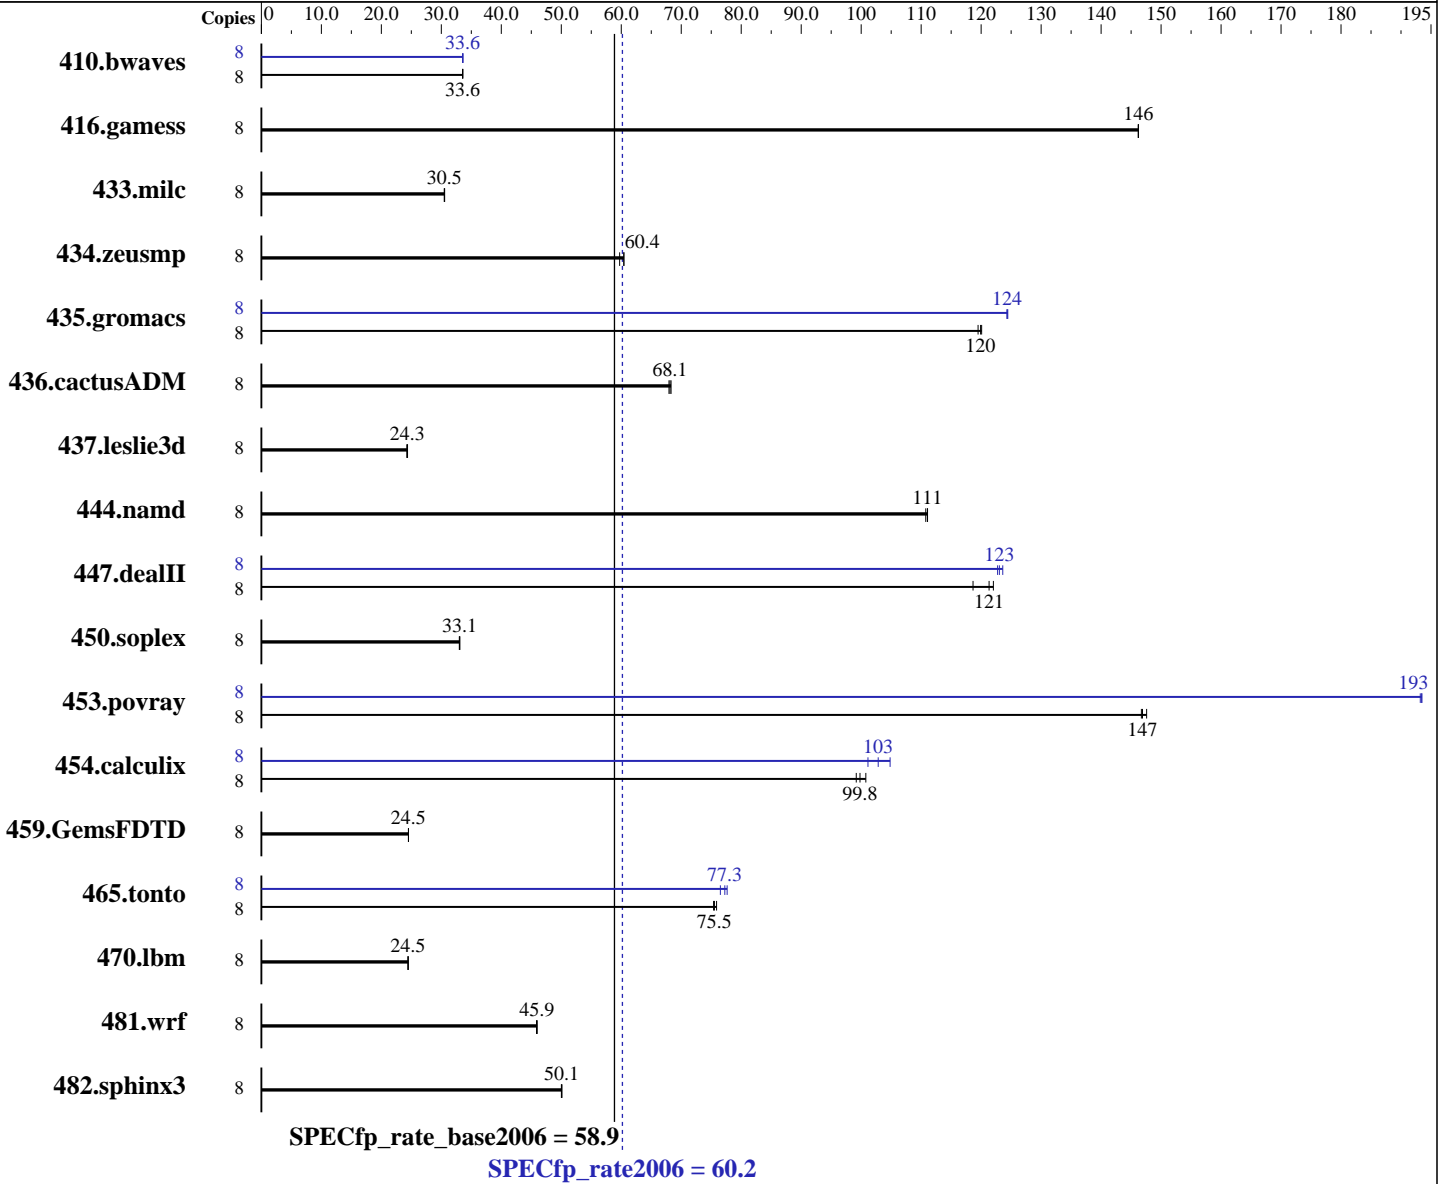

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: X5355
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for Linux64 EM64T version 9.1 Build 20061101, Package-ID l_cc_p_9.1.045
 Intel Fortran Compiler for Linux64 EM64T version 9.1 Build 20061101 Package ID: l_fc_p_9.1.040
 Auto Parallel: No
 File System: ReiserFS
 System State: Default

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355,
2.66 GHz

SPECfp_rate2006 = **60.2**

SPECfp_rate_base2006 = **58.9**

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: SAS (73GB 15400 rpm)
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3240	33.6	3240	33.6	3238	33.6	8	3238	33.6	3238	33.6	3237	33.6
416.gamess	8	1071	146	1071	146	1071	146	8	1071	146	1071	146	1071	146
433.milc	8	2407	30.5	2403	30.6	2408	30.5	8	2407	30.5	2403	30.6	2408	30.5
434.zeusmp	8	1204	60.4	1205	60.4	1219	59.7	8	1204	60.4	1205	60.4	1219	59.7
435.gromacs	8	476	120	478	119	476	120	8	459	124	459	124	459	124
436.cactusADM	8	1403	68.1	1407	68.0	1400	68.3	8	1403	68.1	1407	68.0	1400	68.3
437.leslie3d	8	3086	24.4	3091	24.3	3101	24.3	8	3086	24.4	3091	24.3	3101	24.3
444.namd	8	579	111	578	111	578	111	8	579	111	578	111	578	111
447.dealII	8	754	121	771	119	750	122	8	740	124	746	123	744	123
450.soplex	8	2018	33.1	2022	33.0	2017	33.1	8	2018	33.1	2022	33.0	2017	33.1
453.povray	8	290	147	290	147	288	148	8	220	193	220	193	220	193
454.calculix	8	665	99.2	661	99.8	655	101	8	630	105	653	101	642	103
459.GemsFDTD	8	3461	24.5	3461	24.5	3461	24.5	8	3461	24.5	3461	24.5	3461	24.5
465.tonto	8	1044	75.4	1037	75.9	1042	75.5	8	1019	77.3	1014	77.7	1029	76.5
470.lbm	8	4493	24.5	4493	24.5	4493	24.5	8	4493	24.5	4493	24.5	4493	24.5
481.wrf	8	1945	45.9	1948	45.9	1944	46.0	8	1945	45.9	1948	45.9	1944	46.0
482.sphinx3	8	3112	50.1	3117	50.0	3115	50.1	8	3112	50.1	3117	50.0	3115	50.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

The PRIMERGY RX300 S3 and the PRIMERGY TX300 S3 are electronically equivalent.

The system bus runs at 1333 MHz

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355,
2.66 GHz

SPECfp_rate2006 = 60.2

SPECfp_rate_base2006 = 58.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

General Notes (Continued)

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355,
2.66 GHz

SPECfp_rate2006 = 60.2

SPECfp_rate_base2006 = 58.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast

450.soplex: basepeak = yes

453.povray: Same as 447.dealII

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355,
2.66 GHz

SPECfp_rate2006 = 60.2

SPECfp_rate_base2006 = 58.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -prof_gen(pass 1) -prof_use(pass 2) -fast

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.18.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.18.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:30:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2007.