



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 34.8

Acer Altos G540 (Intel Xeon X5355, 2.66GHz)

SPECfp_rate_base2006 = 33.9

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

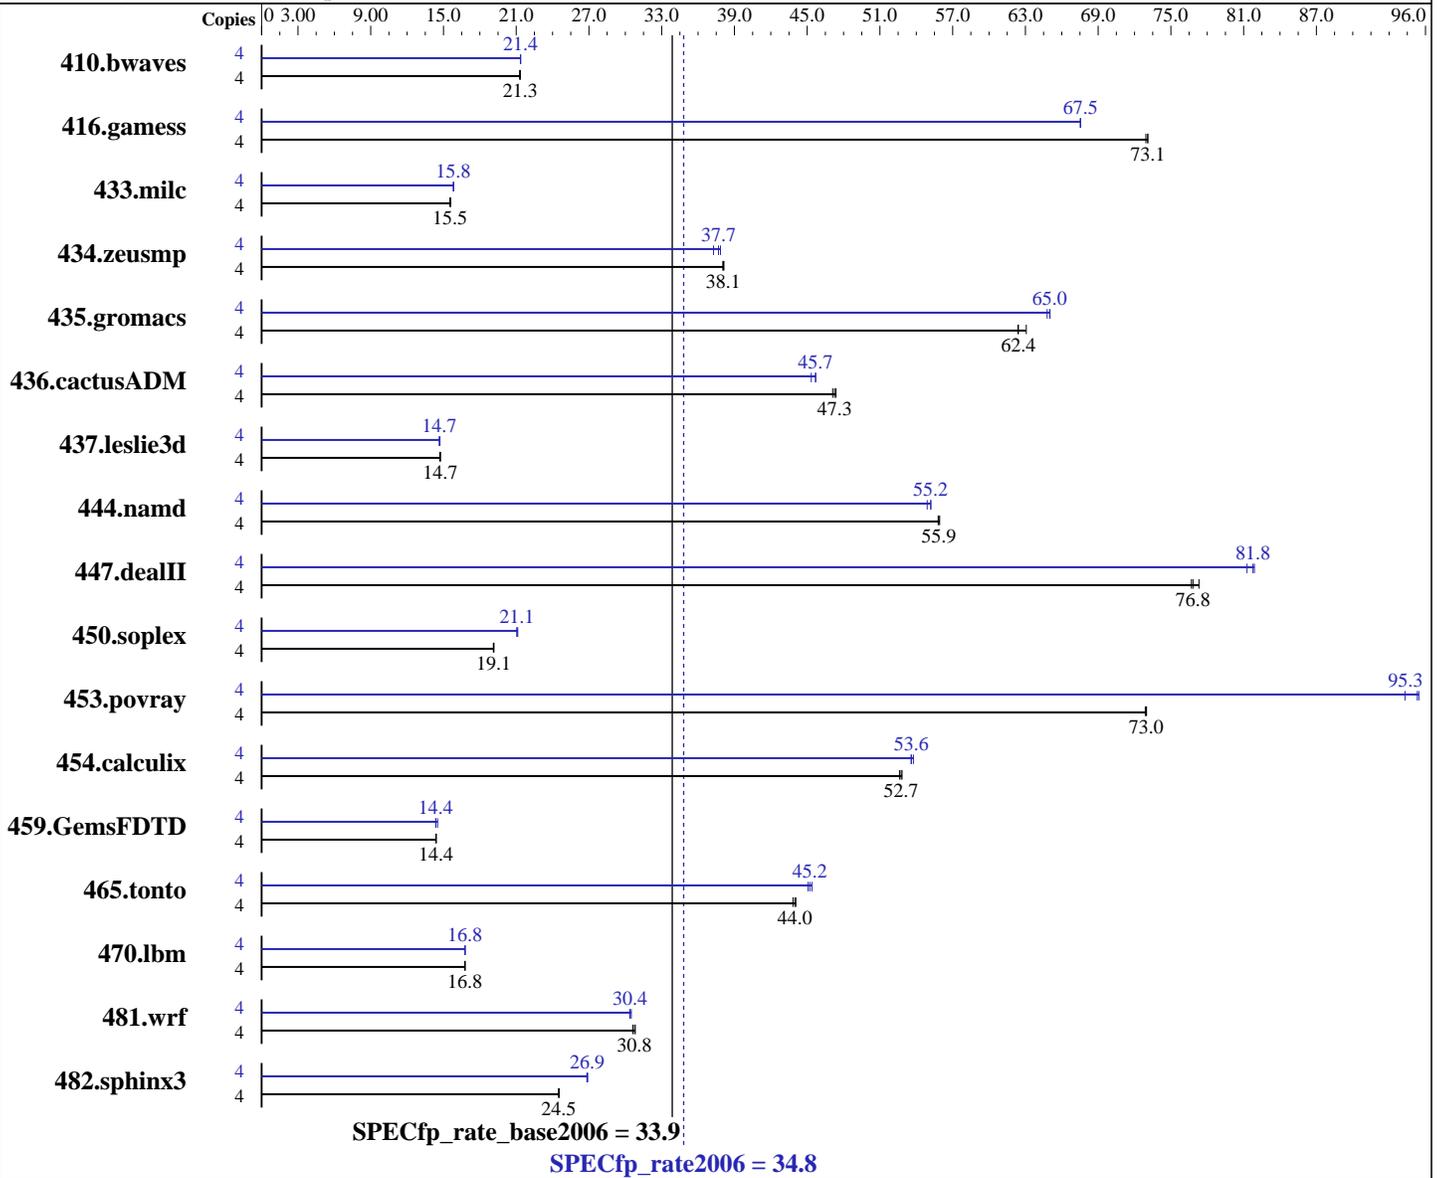

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 EM64T (kernel 2.6.16.21-0.8-smp)
 Compiler: Intel C++ Compiler 9.1 for Intel EM64T-based Package ID l_cc_c_9.1.042 Build no 20060707
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_fc_c_9.1.040 Build no 20061101
 Auto Parallel: No
 File System: ReiserFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 34.8

Acer Altos G540 (Intel Xeon X5355, 2.66GHz)

SPECfp_rate_base2006 = 33.9

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Feb-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2006

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667)
Disk Subsystem: 1 x 73GB 10000RPM SAS HDD
Other Hardware: None

System State: Default
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: --

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<u>2549</u>	<u>21.3</u>	2548	21.3	2554	21.3	4	2547	21.3	2544	21.4	<u>2546</u>	<u>21.4</u>
416.gamess	4	<u>1072</u>	<u>73.1</u>	1071	73.1	1074	72.9	4	1159	67.6	<u>1159</u>	<u>67.5</u>	1160	67.5
433.milc	4	<u>2362</u>	<u>15.5</u>	2362	15.5	2356	15.6	4	<u>2321</u>	<u>15.8</u>	2317	15.9	2322	15.8
434.zeusmp	4	<u>956</u>	<u>38.1</u>	957	38.0	955	38.1	4	977	37.3	<u>966</u>	<u>37.7</u>	962	37.9
435.gromacs	4	<u>458</u>	<u>62.4</u>	453	63.1	458	62.4	4	439	65.0	441	64.8	<u>439</u>	<u>65.0</u>
436.cactusADM	4	1009	47.4	1015	47.1	<u>1011</u>	<u>47.3</u>	4	<u>1046</u>	<u>45.7</u>	1054	45.3	1046	45.7
437.leslie3d	4	<u>2551</u>	<u>14.7</u>	2550	14.7	2558	14.7	4	2556	14.7	<u>2563</u>	<u>14.7</u>	2566	14.7
444.namd	4	<u>574</u>	<u>55.9</u>	574	55.9	575	55.8	4	581	55.2	584	54.9	<u>581</u>	<u>55.2</u>
447.dealII	4	592	77.3	597	76.7	<u>596</u>	<u>76.8</u>	4	<u>560</u>	<u>81.8</u>	563	81.3	559	81.9
450.soplex	4	<u>1743</u>	<u>19.1</u>	1745	19.1	1741	19.2	4	1579	21.1	<u>1584</u>	<u>21.1</u>	1584	21.1
453.povray	4	292	72.9	292	73.0	<u>292</u>	<u>73.0</u>	4	226	94.3	<u>223</u>	<u>95.3</u>	223	95.5
454.calculix	4	<u>626</u>	<u>52.7</u>	627	52.6	625	52.8	4	616	53.6	614	53.8	<u>616</u>	<u>53.6</u>
459.GemsFDTD	4	<u>2949</u>	<u>14.4</u>	2949	14.4	2950	14.4	4	2954	14.4	<u>2954</u>	<u>14.4</u>	2923	14.5
465.tonto	4	893	44.1	<u>895</u>	<u>44.0</u>	898	43.8	4	<u>870</u>	<u>45.2</u>	873	45.1	867	45.4
470.lbm	4	3275	16.8	<u>3276</u>	<u>16.8</u>	3277	16.8	4	3276	16.8	<u>3276</u>	<u>16.8</u>	3274	16.8
481.wrf	4	1459	30.6	1450	30.8	<u>1452</u>	<u>30.8</u>	4	1471	30.4	<u>1470</u>	<u>30.4</u>	1465	30.5
482.sphinx3	4	3177	24.5	<u>3179</u>	<u>24.5</u>	3183	24.5	4	2898	26.9	<u>2903</u>	<u>26.9</u>	2905	26.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 34.8

Acer Altos G540 (Intel Xeon X5355, 2.66GHz)

SPECfp_rate_base2006 = 33.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 34.8

Acer Altos G540 (Intel Xeon X5355, 2.66GHz)

SPECfp_rate_base2006 = 33.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:

-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:

-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Benchmarks using both Fortran and C:

-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-CPU2006-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Acer-CPU2006-ic91-flags.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 34.8

Acer Altos G540 (Intel Xeon X5355, 2.66GHz)

SPECfp_rate_base2006 = 33.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:58:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 March 2007.