



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor X5355, 2.66 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 58.2

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

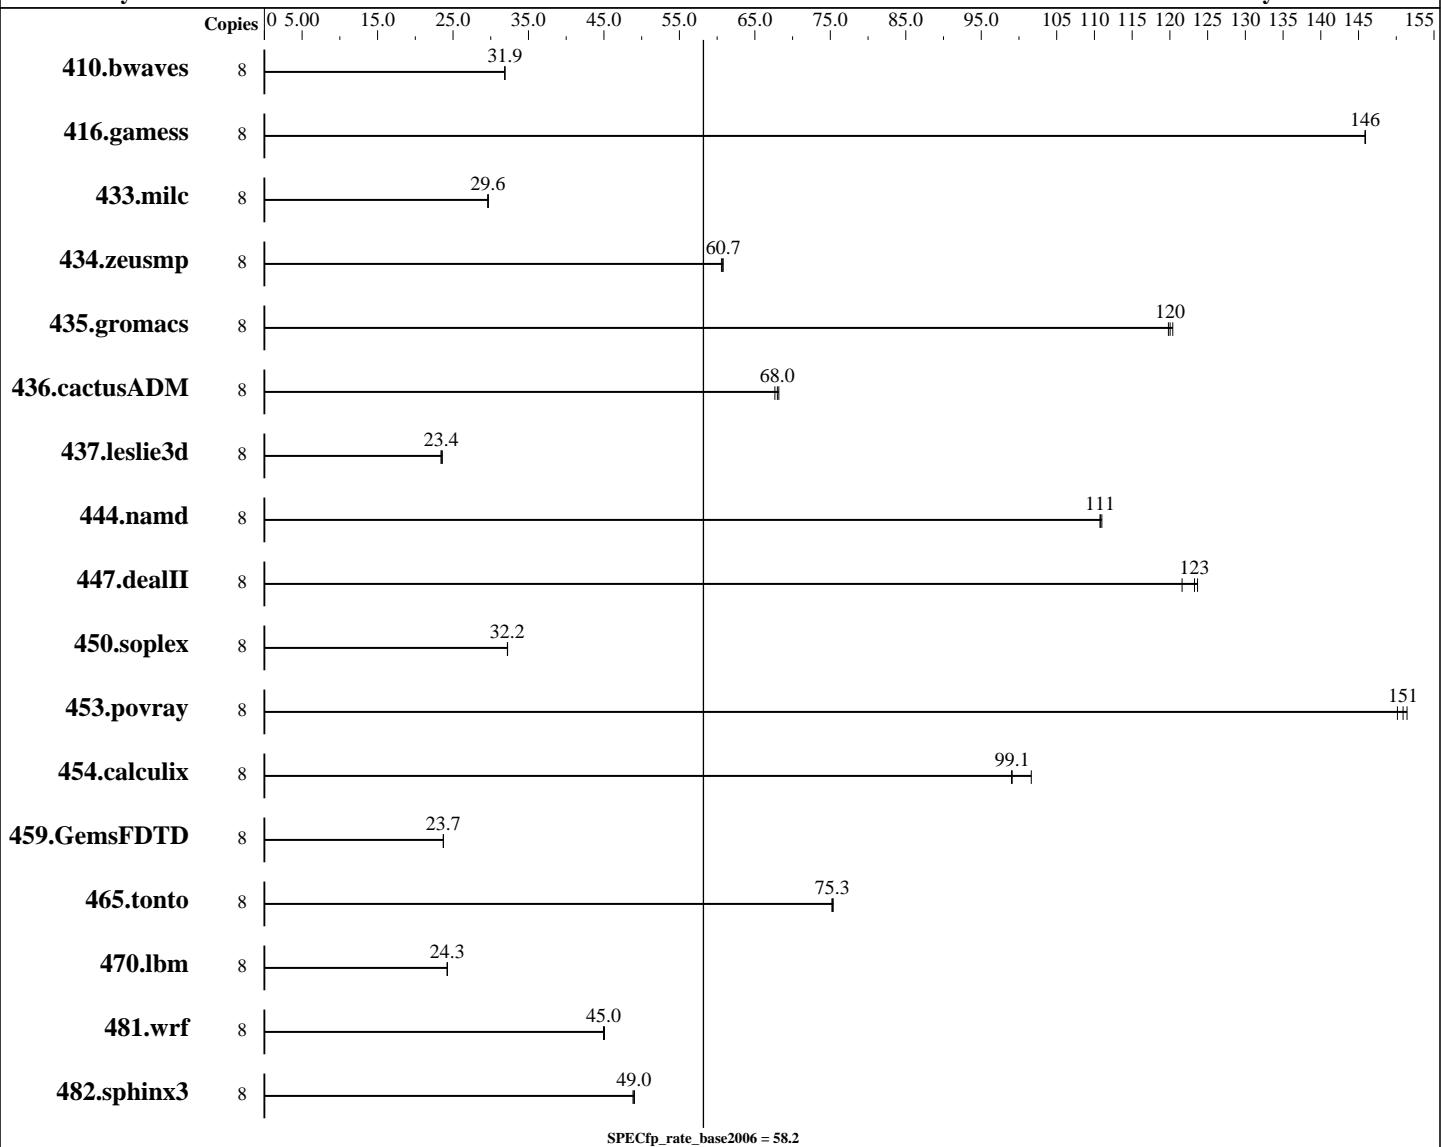

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 1333 MHz Bus Speed
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 EM64T kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_cc_c_9.1.045 Build no 20061101
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_fc_c_9.1.040 Build no 20061101
 Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor X5355, 2.66 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 58.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB 667MHz CL5 DDR2 FB-DIMM SDRAM)
 Disk Subsystem: 1 x 73 GB SAS 15K RPM
 Other Hardware: None

File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3412	31.9	3412	31.9	3412	31.9							
416.gamess	8	1074	146	1074	146	1073	146							
433.milc	8	2479	29.6	2474	29.7	2480	29.6							
434.zeusmp	8	1202	60.6	1199	60.7	1198	60.8							
435.gromacs	8	474	120	476	120	477	120							
436.cactusADM	8	1402	68.2	1406	68.0	1413	67.7							
437.leslie3d	8	3188	23.6	3210	23.4	3208	23.4							
444.namd	8	578	111	579	111	579	111							
447.dealII	8	742	123	740	124	753	122							
450.soplex	8	2071	32.2	2072	32.2	2070	32.2							
453.povray	8	283	150	282	151	281	151							
454.calculix	8	649	102	666	99.1	667	99.0							
459.GemsFDTD	8	3579	23.7	3577	23.7	3577	23.7							
465.tonto	8	1047	75.2	1046	75.3	1044	75.4							
470.lbm	8	4532	24.3	4540	24.2	4530	24.3							
481.wrf	8	1988	45.0	1988	45.0	1983	45.1							
482.sphinx3	8	3179	49.0	3192	48.9	3184	49.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Hardware Prefetcher disabled in BIOS
 Adjacent Cache Line Prefetch disabled in BIOS
 "ulimit -s unlimited" set

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor X5355, 2.66 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 58.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:
 `ifort`

Benchmarks using both Fortran and C:
 `icc ifort`

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  450.soplex: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
 `-fast`

C++ benchmarks:
 `-fast`

Fortran benchmarks:
 `-fast`

Benchmarks using both Fortran and C:
 `-fast`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor X5355, 2.66 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 58.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:52:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 April 2007.