



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 58.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECfp_rate_base2006 = 57.1

CPU2006 license: 3


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

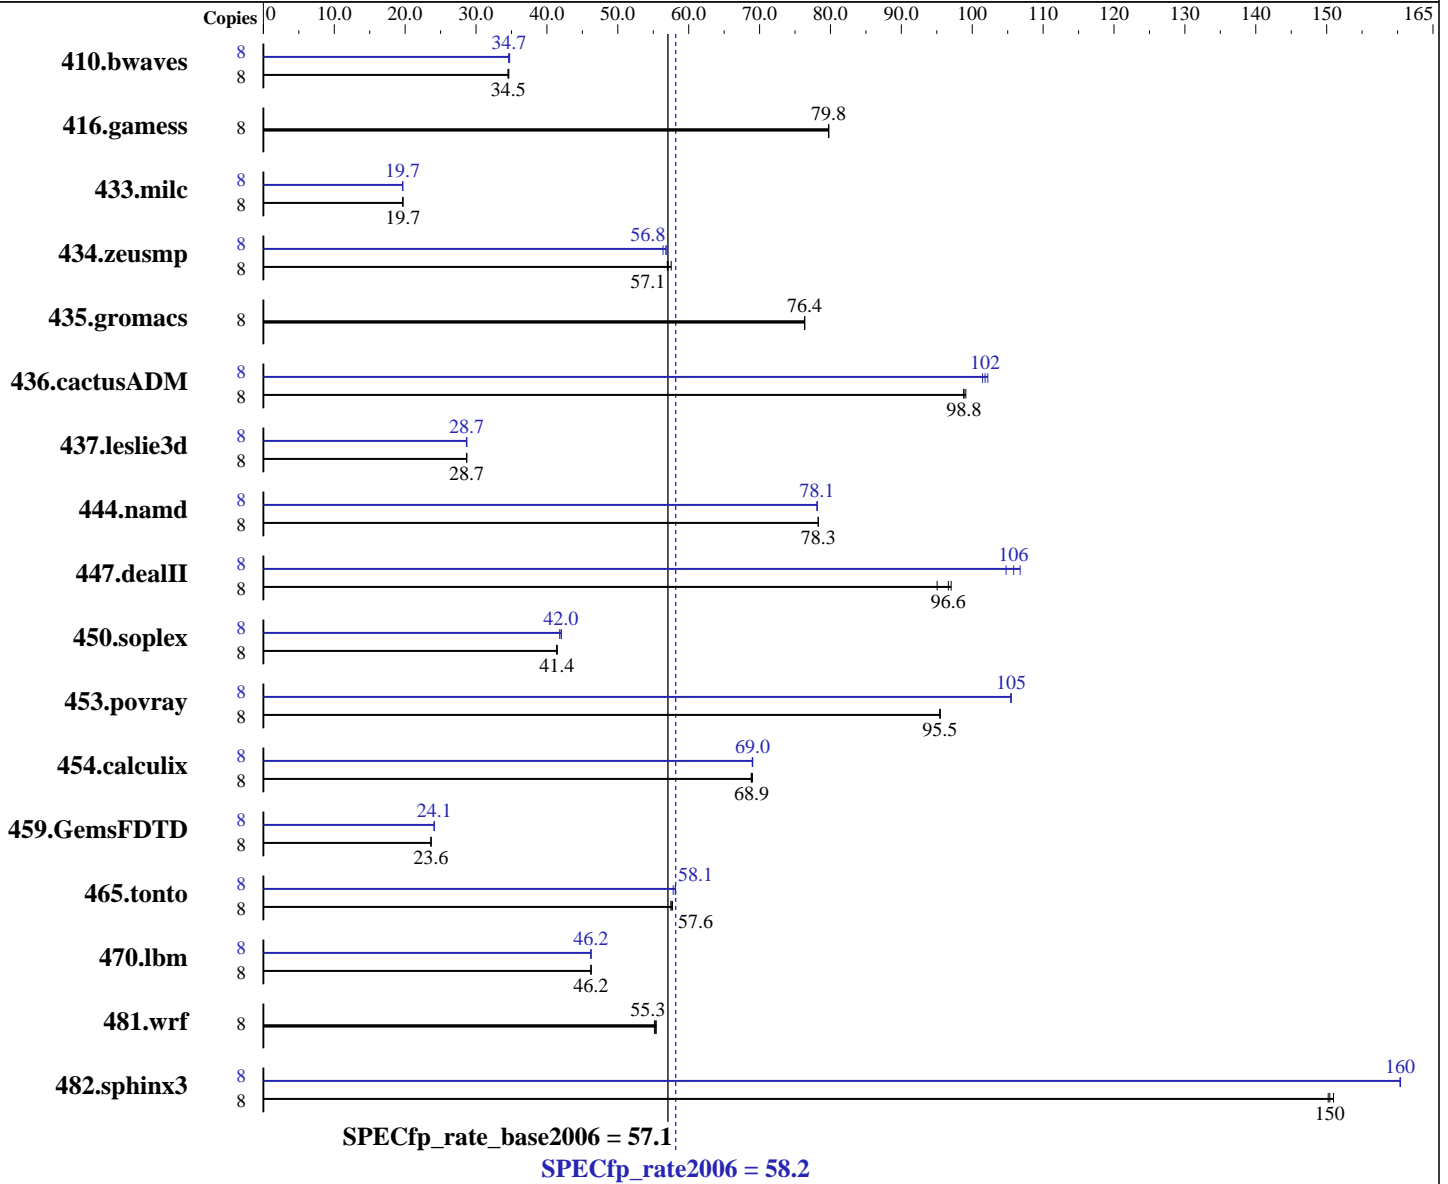

Hardware

CPU Name: Intel Xeon 7140M
 CPU Characteristics: 3.4GHz, 800MHz bus
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: Windows Server 2003 Enterprise X64 Edition
 Compiler: Intel C++ Compiler 9.1 for 32-bit
 Build 20061103Z Package ID: W_CC_C_9.1.033
 Intel Fortran Compiler 9.1 for 32-bit
 Build 20061103Z Package ID: W_FC_C_9.1.033
 Microsoft Visual Studio .NET 2003 (libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = **58.2**

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECfp_rate_base2006 = **57.1**

CPU2006 license: 3

Test date: Mar-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (16X1GB 1Rx4 PC2-3200R-333 400MHz DDR2)
 Disk Subsystem: 2x36GB SAS 15000 rpm
 Other Hardware: None

Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 8 | 3147 | 34.5 | 3150 | 34.5 | 3139 | 34.6 | 8 | 3129 | 34.7 | 3143 | 34.6 | 3137 | 34.7 |
| 416.gamess | 8 | 1965 | 79.7 | 1964 | 79.8 | 1964 | 79.8 | 8 | 1965 | 79.7 | 1964 | 79.8 | 1964 | 79.8 |
| 433.milc | 8 | 3734 | 19.7 | 3732 | 19.7 | 3732 | 19.7 | 8 | 3736 | 19.7 | 3736 | 19.7 | 3739 | 19.6 |
| 434.zeusmp | 8 | 1275 | 57.1 | 1265 | 57.5 | 1278 | 57.0 | 8 | 1282 | 56.8 | 1291 | 56.4 | 1282 | 56.8 |
| 435.gromacs | 8 | 748 | 76.3 | 748 | 76.4 | 748 | 76.4 | 8 | 748 | 76.3 | 748 | 76.4 | 748 | 76.4 |
| 436.cactusADM | 8 | 968 | 98.8 | 965 | 99.1 | 967 | 98.8 | 8 | 942 | 101 | 935 | 102 | 939 | 102 |
| 437.leslie3d | 8 | 2622 | 28.7 | 2623 | 28.7 | 2622 | 28.7 | 8 | 2619 | 28.7 | 2623 | 28.7 | 2626 | 28.6 |
| 444.namd | 8 | 820 | 78.3 | 820 | 78.3 | 820 | 78.3 | 8 | 821 | 78.1 | 821 | 78.1 | 821 | 78.1 |
| 447.dealII | 8 | 963 | 95.0 | 943 | 97.0 | 947 | 96.6 | 8 | 865 | 106 | 873 | 105 | 857 | 107 |
| 450.soplex | 8 | 1613 | 41.4 | 1611 | 41.4 | 1609 | 41.5 | 8 | 1589 | 42.0 | 1596 | 41.8 | 1587 | 42.0 |
| 453.povray | 8 | 446 | 95.4 | 446 | 95.5 | 446 | 95.5 | 8 | 404 | 105 | 403 | 105 | 403 | 105 |
| 454.calculix | 8 | 957 | 69.0 | 959 | 68.8 | 958 | 68.9 | 8 | 957 | 69.0 | 956 | 69.0 | 956 | 69.0 |
| 459.GemsFDTD | 8 | 3591 | 23.6 | 3590 | 23.6 | 3587 | 23.7 | 8 | 3519 | 24.1 | 3520 | 24.1 | 3525 | 24.1 |
| 465.tonto | 8 | 1366 | 57.6 | 1364 | 57.7 | 1370 | 57.5 | 8 | 1354 | 58.1 | 1354 | 58.1 | 1362 | 57.8 |
| 470.lbm | 8 | 2379 | 46.2 | 2378 | 46.2 | 2377 | 46.2 | 8 | 2378 | 46.2 | 2378 | 46.2 | 2379 | 46.2 |
| 481.wrf | 8 | 1620 | 55.2 | 1616 | 55.3 | 1612 | 55.4 | 8 | 1620 | 55.2 | 1616 | 55.3 | 1612 | 55.4 |
| 482.sphinx3 | 8 | 1033 | 151 | 1036 | 150 | 1038 | 150 | 8 | 972 | 160 | 972 | 160 | 972 | 160 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes

The NovaScale T880 and the NovaScale R480 models are electronically equivalent.
 The results have been measured on a NovaScale R480 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 58.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECfp_rate_base2006 = 57.1

CPU2006 license: 3
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2007
Hardware Availability: Sep-2006
Software Availability: Nov-2006

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99
C++ benchmarks:
icl -Qvc7.1
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icl -Qvc7.1 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE
C++ benchmarks:
-fast -Qcxx_features /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE
Fortran benchmarks:
-fast /F950000000 -link /FORCE:MULTIPLE
Benchmarks using both Fortran and C:
-fast /F950000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99
C++ benchmarks:
icl -Qvc7.1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 58.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECfp_rate_base2006 = 57.1

CPU2006 license: 3

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
 444.namd: -TP
 447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -DBOOST_NO_INTRINSIC_WCHAR_T
 453.povray: -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
 481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: Same as 410.bwaves

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 58.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECfp_rate_base2006 = 57.1

CPU2006 license: 3

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

436.cactusADM: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

454.calculix: Same as 436.cactusADM

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:05:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2007.