



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55


Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2006

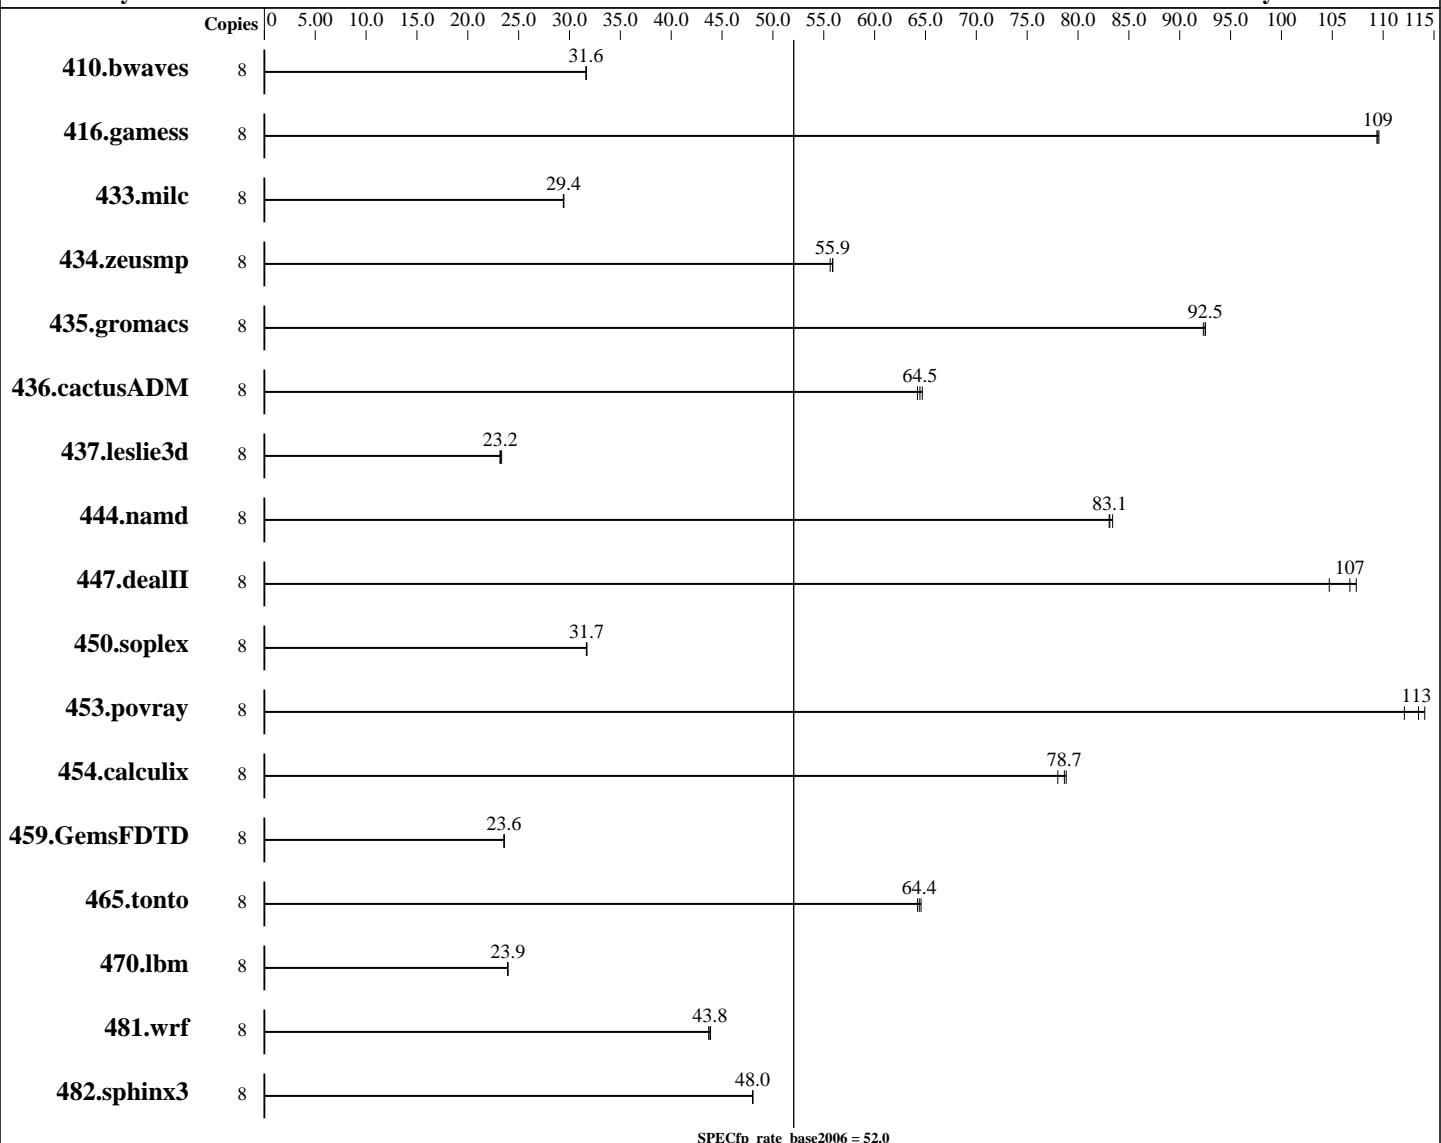

Hardware

CPU Name: Intel Xeon E5335
CPU Characteristics: 1333 MHz Bus Speed
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 EM64T kernel 2.6.16.21-0.8-smp
Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1
Package ID l_cc_c_9.1.045 Build no 20061101
Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1
Package ID l_fc_c_9.1.040 Build no 20061101
Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB 667MHz CL5 DDR2 FB-DIMM SDRAM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>3437</u>	<u>31.6</u>	3437	31.6	3436	31.6							
416.gamess	8	<u>1431</u>	<u>109</u>	1432	109	1429	110							
433.milc	8	2494	29.4	2498	29.4	<u>2497</u>	<u>29.4</u>							
434.zeusmp	8	1302	55.9	<u>1303</u>	<u>55.9</u>	1309	55.6							
435.gromacs	8	<u>617</u>	<u>92.5</u>	617	92.5	619	92.3							
436.cactusADM	8	<u>1483</u>	<u>64.5</u>	1478	64.7	1489	64.2							
437.leslie3d	8	3224	23.3	3246	23.2	<u>3240</u>	<u>23.2</u>							
444.namd	8	769	83.4	772	83.1	<u>772</u>	<u>83.1</u>							
447.dealII	8	<u>857</u>	<u>107</u>	852	107	874	105							
450.soplex	8	2107	31.7	2104	31.7	<u>2106</u>	<u>31.7</u>							
453.povray	8	380	112	373	114	<u>375</u>	<u>113</u>							
454.calculix	8	846	78.0	<u>839</u>	<u>78.7</u>	837	78.8							
459.GemsFDTD	8	3602	23.6	3600	23.6	<u>3601</u>	<u>23.6</u>							
465.tonto	8	<u>1223</u>	<u>64.4</u>	1219	64.6	1226	64.2							
470.lbm	8	4593	23.9	4592	23.9	<u>4592</u>	<u>23.9</u>							
481.wrf	8	2037	43.9	2046	43.7	<u>2040</u>	<u>43.8</u>							
482.sphinx3	8	<u>3248</u>	<u>48.0</u>	3245	48.0	3249	48.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Hardware Prefetcher disabled in BIOS
 Adjacent Cache Line Prefetch disabled in BIOS
 "ulimit -s unlimited" set

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:
 `ifort`

Benchmarks using both Fortran and C:
 `icc ifort`

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  450.soplex: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
 `-fast`

C++ benchmarks:
 `-fast`

Fortran benchmarks:
 `-fast`

Benchmarks using both Fortran and C:
 `-fast`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:03:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2007.