



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

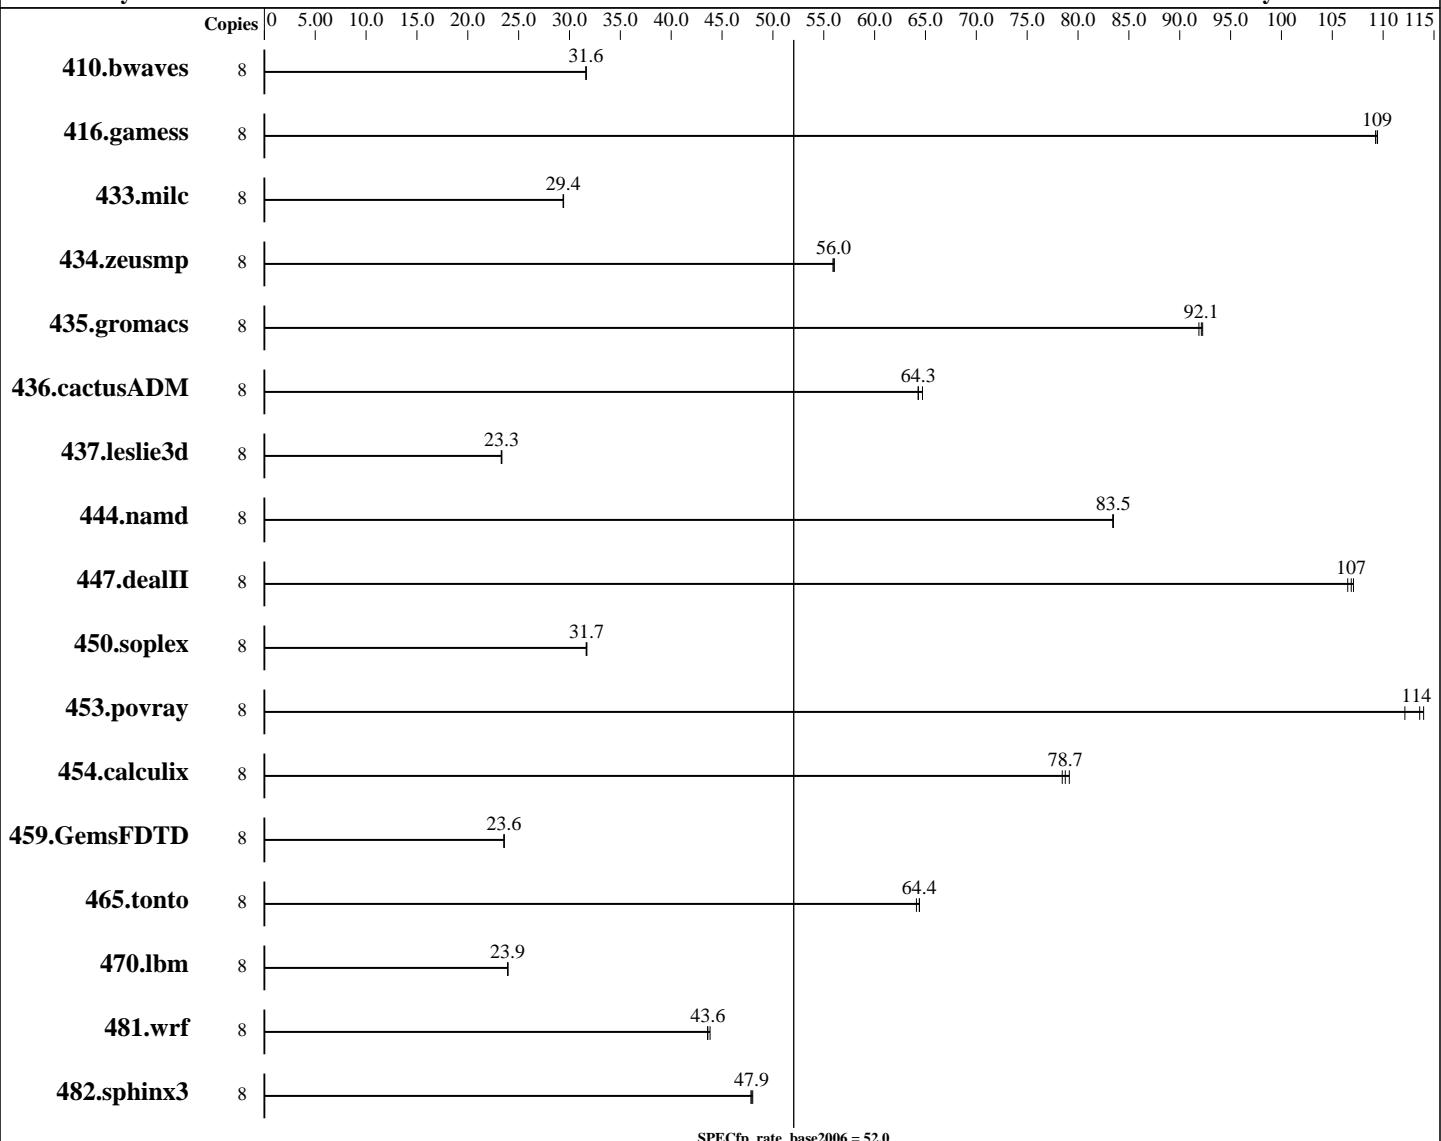

Hardware

CPU Name: Intel Xeon E5335
 CPU Characteristics: 1333 MHz Bus Speed
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 EM64T kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_cc_c_9.1.045 Build no 20061101
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_fc_c_9.1.040 Build no 20061101
 Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB 667MHz CL5 DDR2 FB-DIMM SDRAM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3436	31.6	<u>3437</u>	<u>31.6</u>	3439	31.6							
416.gamess	8	1431	109	1434	109	<u>1432</u>	<u>109</u>							
433.milc	8	2500	29.4	<u>2499</u>	<u>29.4</u>	2496	29.4							
434.zeusmp	8	<u>1300</u>	<u>56.0</u>	1302	55.9	1299	56.0							
435.gromacs	8	622	91.9	<u>620</u>	<u>92.1</u>	619	92.3							
436.cactusADM	8	1477	64.7	1487	64.3	<u>1487</u>	<u>64.3</u>							
437.leslie3d	8	3220	23.4	3229	23.3	<u>3225</u>	<u>23.3</u>							
444.namd	8	<u>769</u>	<u>83.5</u>	769	83.4	769	83.5							
447.dealII	8	855	107	859	107	<u>856</u>	<u>107</u>							
450.soplex	8	2109	31.6	2105	31.7	<u>2106</u>	<u>31.7</u>							
453.povray	8	<u>375</u>	<u>114</u>	373	114	380	112							
454.calculix	8	834	79.1	<u>838</u>	<u>78.7</u>	841	78.4							
459.GemsFDTD	8	3602	23.6	<u>3601</u>	<u>23.6</u>	3600	23.6							
465.tonto	8	1222	64.4	<u>1222</u>	<u>64.4</u>	1228	64.1							
470.lbm	8	4592	23.9	4594	23.9	<u>4593</u>	<u>23.9</u>							
481.wrf	8	2051	43.6	2039	43.8	<u>2049</u>	<u>43.6</u>							
482.sphinx3	8	<u>3254</u>	<u>47.9</u>	3247	48.0	3259	47.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Hardware Prefetcher disabled in BIOS
 Adjacent Cache Line Prefetch disabled in BIOS
 "ulimit -s unlimited" set

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:
 `ifort`

Benchmarks using both Fortran and C:
 `icc ifort`

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  450.soplex: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
 `-fast`

C++ benchmarks:
 `-fast`

Fortran benchmarks:
 `-fast`

Benchmarks using both Fortran and C:
 `-fast`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5335, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 52.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:58:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2007.