



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECfp<sup>®</sup>\_rate2006 = 39.0

SPECfp\_rate\_base2006 = 37.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

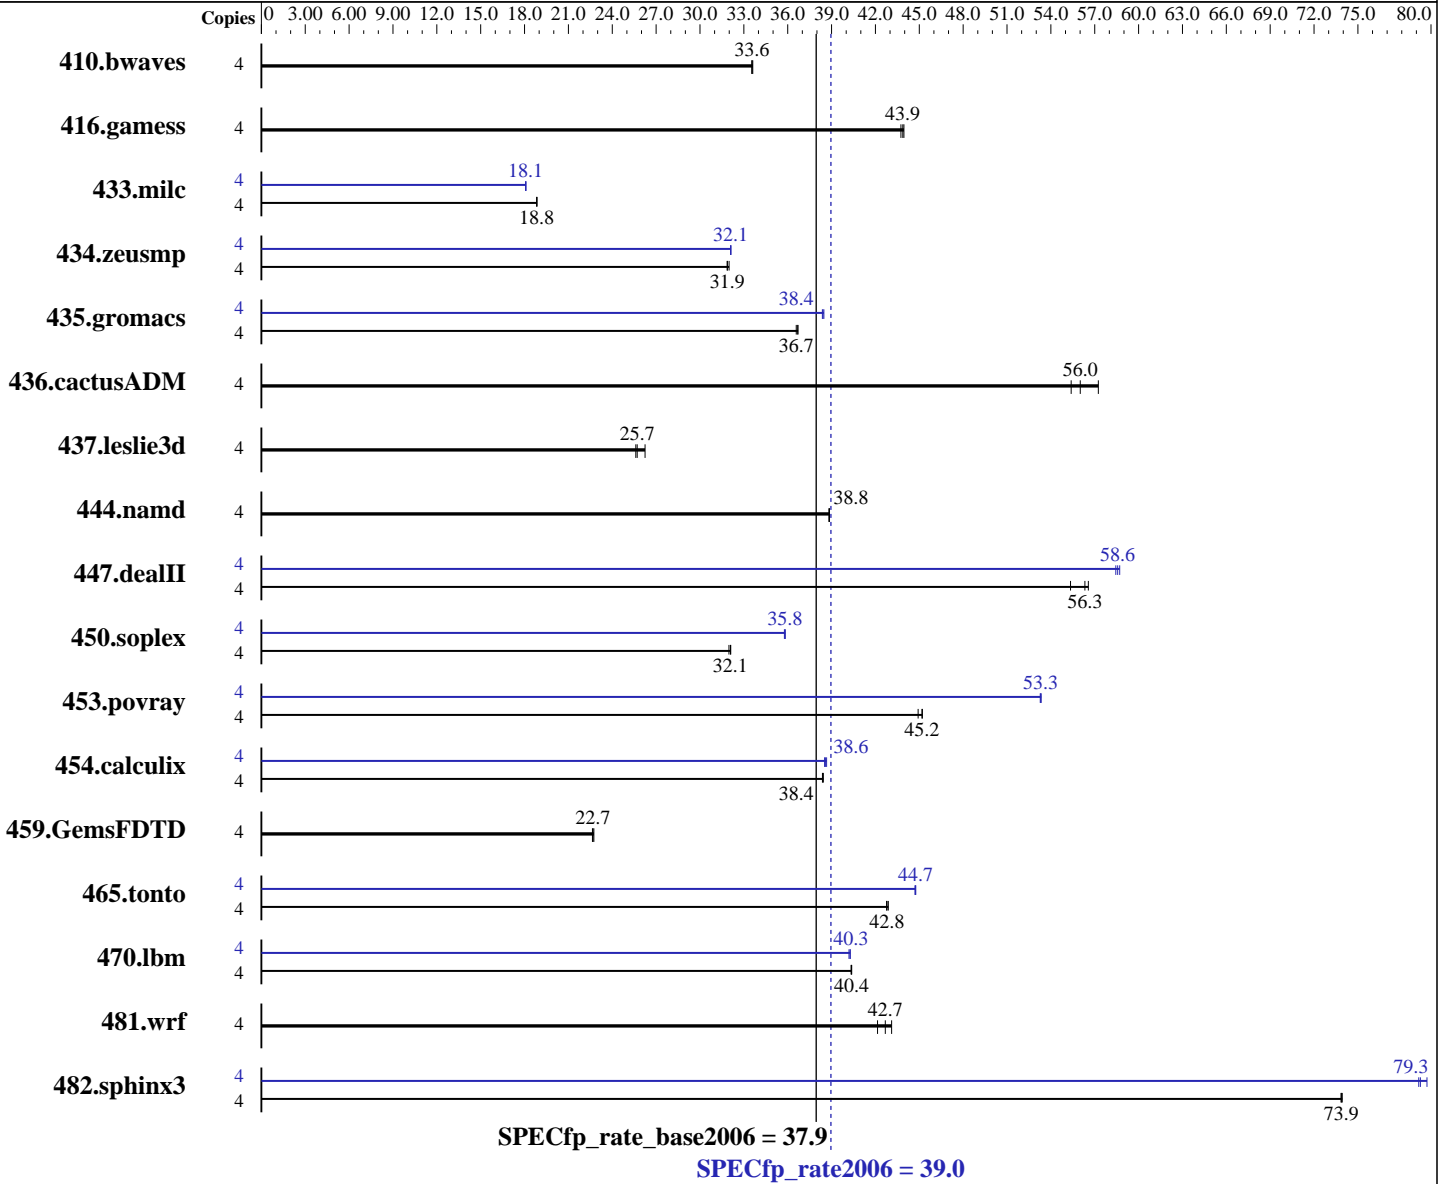

### Hardware

CPU Name: Intel Xeon 7140M  
 CPU Characteristics: 800 MHz system bus  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l\_fc\_p\_9.1.043  
 Auto Parallel: No  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECfp\_rate2006 = 39.0

SPECfp\_rate\_base2006 = 37.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (16x2 GB DDR2 PC2-3200R, 2 rank, CAS 3-3-3, with ECC)  
Disk Subsystem: Fujitsu MAS3735NC (SCSI 73GB 15 krpm)  
Other Hardware: None

System State: Multiuser, Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>1620</b>	<b>33.6</b>	1620	33.5	1617	33.6	4	<b>1620</b>	<b>33.6</b>	1620	33.5	1617	33.6
416.gamess	4	1782	43.9	1790	43.7	<b>1785</b>	<b>43.9</b>	4	1782	43.9	1790	43.7	<b>1785</b>	<b>43.9</b>
433.milc	4	<b>1949</b>	<b>18.8</b>	1949	18.8	1950	18.8	4	<b>2030</b>	<b>18.1</b>	2030	18.1	2031	18.1
434.zeusmp	4	1142	31.9	1138	32.0	<b>1142</b>	<b>31.9</b>	4	1134	32.1	<b>1134</b>	<b>32.1</b>	1133	32.1
435.gromacs	4	778	36.7	781	36.6	<b>779</b>	<b>36.7</b>	4	<b>743</b>	<b>38.4</b>	742	38.5	744	38.4
436.cactusADM	4	<b>853</b>	<b>56.0</b>	835	57.2	863	55.4	4	<b>853</b>	<b>56.0</b>	835	57.2	863	55.4
437.leslie3d	4	1433	26.2	1468	25.6	<b>1463</b>	<b>25.7</b>	4	1433	26.2	1468	25.6	<b>1463</b>	<b>25.7</b>
444.namd	4	826	38.8	826	38.9	<b>826</b>	<b>38.8</b>	4	826	38.8	826	38.9	<b>826</b>	<b>38.8</b>
447.dealII	4	827	55.3	<b>812</b>	<b>56.3</b>	809	56.6	4	779	58.7	783	58.4	<b>781</b>	<b>58.6</b>
450.soplex	4	<b>1040</b>	<b>32.1</b>	1039	32.1	1043	32.0	4	933	35.8	931	35.8	<b>931</b>	<b>35.8</b>
453.povray	4	474	44.9	<b>471</b>	<b>45.2</b>	471	45.2	4	399	53.3	399	53.3	<b>399</b>	<b>53.3</b>
454.calculix	4	859	38.4	860	38.4	<b>859</b>	<b>38.4</b>	4	857	38.5	854	38.7	<b>855</b>	<b>38.6</b>
459.GemsFDTD	4	1866	22.7	<b>1871</b>	<b>22.7</b>	1874	22.6	4	1866	22.7	<b>1871</b>	<b>22.7</b>	1874	22.6
465.tonto	4	<b>920</b>	<b>42.8</b>	918	42.9	920	42.8	4	880	44.7	<b>880</b>	<b>44.7</b>	879	44.8
470.lbm	4	1361	40.4	<b>1362</b>	<b>40.4</b>	1363	40.3	4	1365	40.3	1368	40.2	<b>1365</b>	<b>40.3</b>
481.wrf	4	<b>1047</b>	<b>42.7</b>	1036	43.1	1060	42.1	4	<b>1047</b>	<b>42.7</b>	1036	43.1	1060	42.1
482.sphinx3	4	1055	73.9	1056	73.8	<b>1055</b>	<b>73.9</b>	4	985	79.2	978	79.7	<b>983</b>	<b>79.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 800 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M,  
3.40 GHz

**SPECfp\_rate2006 = 39.0**

**SPECfp\_rate\_base2006 = 37.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Feb-2007

### General Notes (Continued)

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable

This result was measured on the PRIMERGY RX600 S3. The PRIMERGY RX600 S3 and the PRIMERGY TX600 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

### Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

### Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

### Base Optimization Flags

C benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX600 S3, Intel Xeon processor 7140M,  
3.40 GHz

**SPECfp\_rate2006 = 39.0**

**SPECfp\_rate\_base2006 = 37.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Feb-2007

## Base Optimization Flags (Continued)

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks:

/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib

Fortran benchmarks (except as noted below):

ifort

434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX600 S3, Intel Xeon processor 7140M,  
3.40 GHz

**SPECfp\_rate2006 = 39.0**

**SPECfp\_rate\_base2006 = 37.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Feb-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M,  
3.40 GHz

SPECfp\_rate2006 = 39.0

SPECfp\_rate\_base2006 = 37.9

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Apr-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Feb-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:38:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 May 2007.