



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 25.0

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = 23.6

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Mar-2007

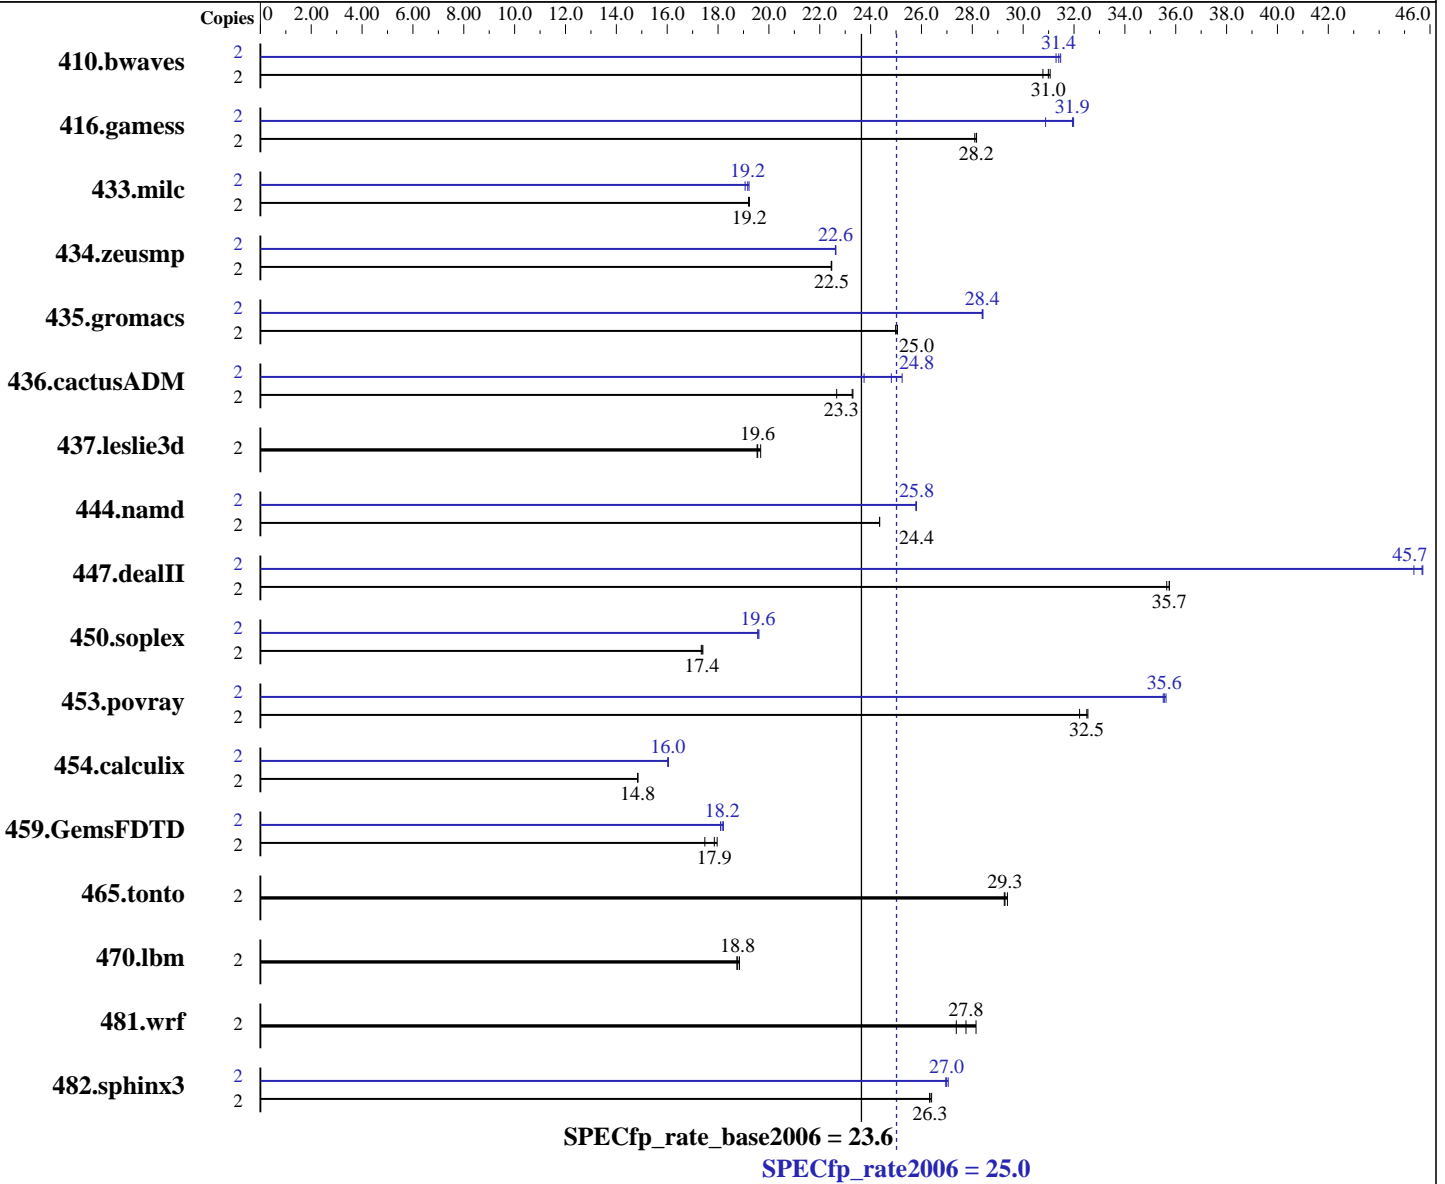

Hardware

CPU Name: AMD Opteron 2220
 CPU Characteristics: 2220
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SLES 10 for AMD64/EM64T
 Compiler: QLogic PathScale Compiler Suite, - Release 3.0
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **25.0**

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = **23.6**

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 32 GB (8x4 GB DDR2 PC2-5300P, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: SAS (36GB 15.4 krpm)
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	2	875	31.1	877	31.0	883	30.8	2	864	31.5	866	31.4	869	31.3		
416.gamess	2	1394	28.1	1390	28.2	1391	28.2	2	1268	30.9	1226	31.9	1224	32.0		
433.milc	2	955	19.2	955	19.2	956	19.2	2	958	19.2	955	19.2	963	19.1		
434.zeusmp	2	810	22.5	811	22.5	810	22.5	2	805	22.6	804	22.6	804	22.6		
435.gromacs	2	572	25.0	570	25.1	570	25.0	2	503	28.4	503	28.4	502	28.4		
436.cactusADM	2	1054	22.7	1027	23.3	1026	23.3	2	963	24.8	1007	23.7	947	25.2		
437.leslie3d	2	961	19.6	962	19.5	955	19.7	2	961	19.6	962	19.5	955	19.7		
444.namd	2	659	24.4	659	24.4	659	24.4	2	622	25.8	622	25.8	622	25.8		
447.dealII	2	642	35.6	640	35.7	640	35.7	2	500	45.7	504	45.4	501	45.7		
450.soplex	2	960	17.4	958	17.4	962	17.3	2	851	19.6	853	19.6	852	19.6		
453.povray	2	327	32.5	330	32.2	327	32.5	2	300	35.5	299	35.6	299	35.6		
454.calculix	2	1112	14.8	1111	14.8	1112	14.8	2	1028	16.0	1029	16.0	1030	16.0		
459.GemsFDTD	2	1189	17.9	1214	17.5	1181	18.0	2	1165	18.2	1168	18.2	1173	18.1		
465.tonto	2	670	29.4	673	29.3	672	29.3	2	670	29.4	673	29.3	672	29.3		
470.lbm	2	1466	18.7	1458	18.8	1464	18.8	2	1466	18.7	1458	18.8	1464	18.8		
481.wrf	2	816	27.4	794	28.1	805	27.8	2	816	27.4	794	28.1	805	27.8		
482.sphinx3	2	1477	26.4	1481	26.3	1480	26.3	2	1444	27.0	1446	27.0	1441	27.1		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' has been used to bind processes to CPUs

General Notes

BIOS settings:
Node Interleave = disabled

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 25.0

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = 23.6

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 25.0

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = 23.6

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

Base Other Flags

C benchmarks:

-IPA:max_jobs=4

C++ benchmarks:

-IPA:max_jobs=4

Fortran benchmarks:

-IPA:max_jobs=4

Benchmarks using both Fortran and C:

-IPA:max_jobs=4

Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 25.0

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = 23.6

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1

470.lbm: basepeak = yes

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -WOPT:aggstr=0 -m32

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-exceptions

447.deallI: -Ofast -static -INLINE:aggressive=on -OPT:malloc_alg=1
-m32 -fno-exceptions

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2
-OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off
-LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10
-LNO:full_unroll=5 -ipa

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 25.0

PRIMERGY RX330 S1, AMD Opteron 2220, 2.8 GHz

SPECfp_rate_base2006 = 23.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Mar-2007

Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem_opnds=on

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-IPA:max_jobs=4

C++ benchmarks:

-IPA:max_jobs=4

Fortran benchmarks:

-IPA:max_jobs=4

Benchmarks using both Fortran and C:

-IPA:max_jobs=4

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:18:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2007.