



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440  
(Intel Xeon processor E5310,1.60GHz)

SPECfp<sup>®</sup>\_rate2006 = 38.8

SPECfp\_rate\_base2006 = 38.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

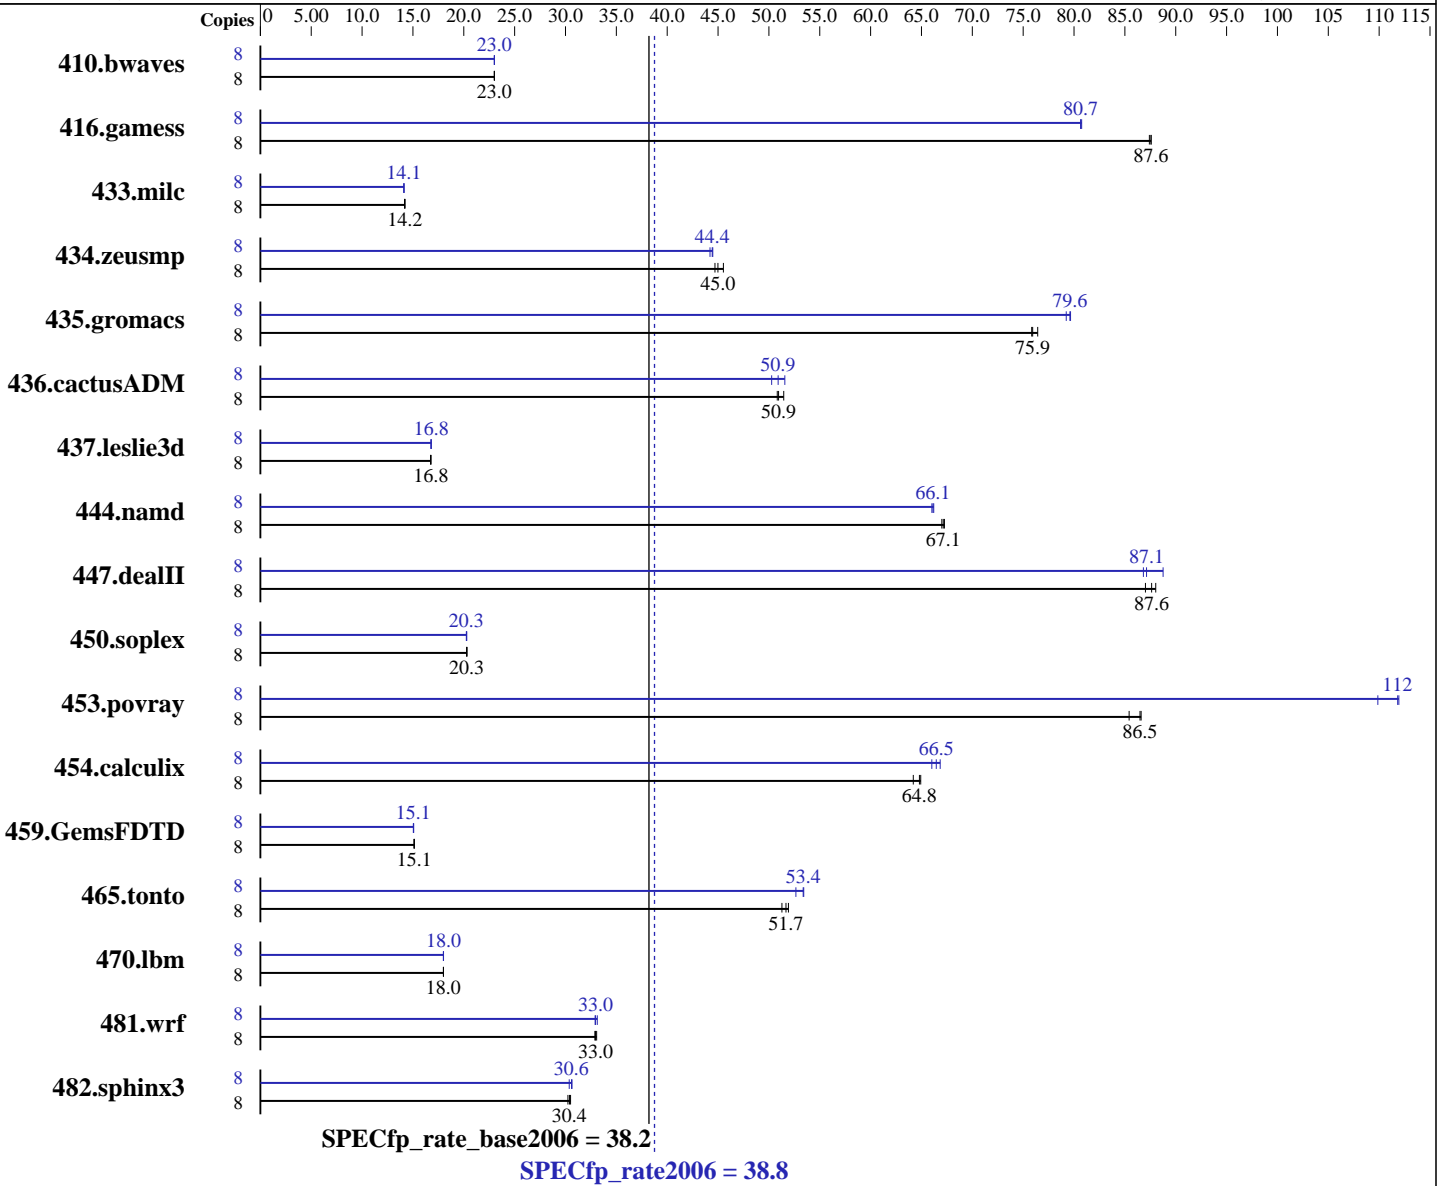

### Hardware

CPU Name: Intel Xeon E5310  
 CPU Characteristics: 1.6 GHz, 8 MB L2, 1066 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (EM64T) kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1  
 Package ID l\_cc\_c\_9.1.045 Build no 20061101  
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1  
 Package ID l\_fc\_c\_9.1.040 Build no 20061101  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440  
(Intel Xeon processor E5310,1.60GHz)

SPECfp\_rate2006 = 38.8

SPECfp\_rate\_base2006 = 38.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 12 GB (1GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)  
Disk Subsystem: 73 GB SAS, 10000RPM  
Other Hardware: None

File System: ext2  
System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4729	23.0	4723	23.0	<b>4724</b>	<b>23.0</b>	8	<b>4726</b>	<b>23.0</b>	4726	23.0	4725	23.0
416.gamess	8	<b>1789</b>	<b>87.6</b>	1792	87.4	1789	87.6	8	<b>1942</b>	<b>80.7</b>	1940	80.8	1942	80.6
433.milc	8	5167	14.2	5182	14.2	<b>5169</b>	<b>14.2</b>	8	<b>5203</b>	<b>14.1</b>	5204	14.1	5202	14.1
434.zeusmp	8	1629	44.7	<b>1618</b>	<b>45.0</b>	1599	45.5	8	1637	44.5	<b>1639</b>	<b>44.4</b>	1647	44.2
435.gromacs	8	753	75.8	<b>752</b>	<b>75.9</b>	747	76.4	8	<b>718</b>	<b>79.6</b>	717	79.7	721	79.2
436.cactusADM	8	1858	51.5	<b>1876</b>	<b>50.9</b>	1881	50.8	8	1854	51.6	<b>1878</b>	<b>50.9</b>	1902	50.3
437.leslie3d	8	<b>4486</b>	<b>16.8</b>	4494	16.7	4484	16.8	8	4484	16.8	<b>4478</b>	<b>16.8</b>	4476	16.8
444.namd	8	954	67.3	958	67.0	<b>956</b>	<b>67.1</b>	8	<b>970</b>	<b>66.1</b>	972	66.0	969	66.2
447.dealII	8	1040	88.0	1052	87.0	<b>1044</b>	<b>87.6</b>	8	<b>1050</b>	<b>87.1</b>	1054	86.8	1031	88.8
450.soplex	8	3290	20.3	<b>3288</b>	<b>20.3</b>	3284	20.3	8	<b>3294</b>	<b>20.3</b>	3294	20.3	3288	20.3
453.povray	8	498	85.4	<b>492</b>	<b>86.5</b>	491	86.6	8	387	110	380	112	<b>381</b>	<b>112</b>
454.calculix	8	1017	64.9	<b>1019</b>	<b>64.8</b>	1028	64.2	8	1000	66.0	987	66.8	<b>993</b>	<b>66.5</b>
459.GemsFDTD	8	5618	15.1	<b>5610</b>	<b>15.1</b>	5609	15.1	8	5644	15.0	<b>5638</b>	<b>15.1</b>	5630	15.1
465.tonto	8	1535	51.3	<b>1523</b>	<b>51.7</b>	1516	51.9	8	1495	52.7	<b>1475</b>	<b>53.4</b>	1473	53.4
470.lbm	8	6105	18.0	6108	18.0	<b>6107</b>	<b>18.0</b>	8	<b>6105</b>	<b>18.0</b>	6111	18.0	6104	18.0
481.wrf	8	<b>2712</b>	<b>33.0</b>	2717	32.9	2703	33.1	8	<b>2711</b>	<b>33.0</b>	2698	33.1	2715	32.9
482.sphinx3	8	5156	30.2	5112	30.5	<b>5131</b>	<b>30.4</b>	8	5134	30.4	5088	30.6	<b>5097</b>	<b>30.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'

## General Notes

The NovaScale R440 and the NovaScale R460 models are electronically equivalent.  
The results have been measured on a NovaScale R460 model.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440  
(Intel Xeon processor E5310,1.60GHz)

SPECfp\_rate2006 = 38.8

SPECfp\_rate\_base2006 = 38.2

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Apr-2007  
**Hardware Availability:** Mar-2007  
**Software Availability:** Dec-2006

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440  
(Intel Xeon processor E5310,1.60GHz)

SPECfp\_rate2006 = 38.8

SPECfp\_rate\_base2006 = 38.2

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2007  
Hardware Availability: Mar-2007  
Software Availability: Dec-2006

## Peak Compiler Invocation

C benchmarks:  
icc  
C++ benchmarks:  
icpc  
Fortran benchmarks:  
ifort  
Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32  
C++ benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32  
Fortran benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast  
Benchmarks using both Fortran and C:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.html](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440  
(Intel Xeon processor E5310,1.60GHz)

SPECfp\_rate2006 = 38.8

SPECfp\_rate\_base2006 = 38.2

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Apr-2007  
**Hardware Availability:** Mar-2007  
**Software Availability:** Dec-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:06:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2007.