



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580

SPECfp®_rate2006 = 700
SPECfp_rate_base2006 = 678

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Aug-2006

Software Availability: Apr-2007

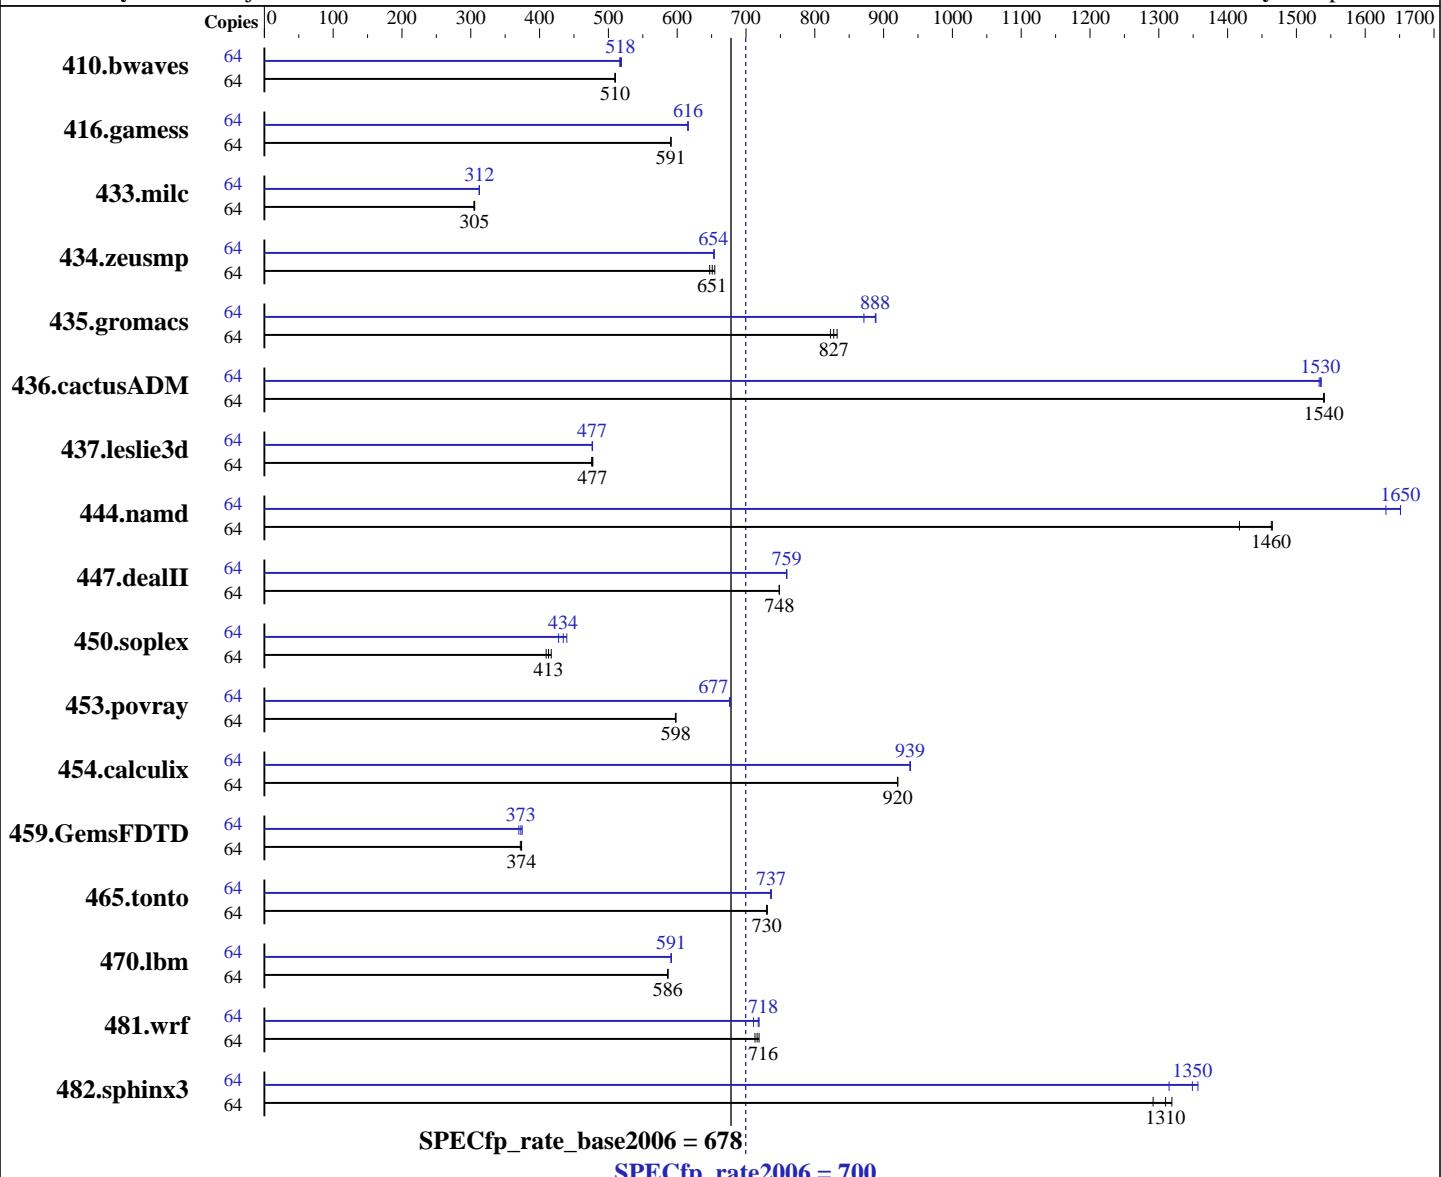

Hardware

CPU Name: Dual-Core Intel Itanium 2 9050
CPU Characteristics: 1.6GHz/24MB, 533MHz FSB
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip
CPU(s) orderable: 1-32 chips
Primary Cache: 16 KB I + 16 KB D on chip per core
Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: Red Hat Enterprise Linux 5 (for Intel Itanium)
Compiler: Intel C++ Compiler for Itanium/Linux 9.1 (Build 20061105)
Intel Fortran Compiler for Itanium/Linux 9.1 (Build 20061105)
Auto Parallel: No
File System: ext2
System State: Single-user
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580

SPECfp_rate2006 = 700
SPECfp_rate_base2006 = 678

CPU2006 license: 19

Test date: Mar-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Aug-2006

Tested by: Fujitsu Limited

Software Availability: Apr-2007

L3 Cache: 12 MB I+D on chip per core
Other Cache: None
Memory: 256 GB (256 x 1GB DDR2-533 DIMMs)
Disk Subsystem: Fujitsu MAW3147NC (SCSI Ultra 320) x 2
147GB 10,025rpm, No RAID configuration
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1704	510	1706	510	1707	509	64	1680	518	1676	519	1684	516
416.gamess	64	2121	591	2122	591	2120	591	64	2036	615	2035	616	2035	616
433.milc	64	1924	305	1929	305	1922	306	64	1882	312	1880	312	1879	313
434.zeusmp	64	890	655	900	647	895	651	64	891	654	892	653	891	654
435.gromacs	64	555	823	549	832	552	827	64	515	888	524	871	514	889
436.cactusADM	64	497	1540	496	1540	497	1540	64	498	1530	498	1540	499	1530
437.leslie3d	64	1261	477	1265	476	1260	477	64	1261	477	1262	477	1262	477
444.namd	64	362	1420	351	1460	350	1470	64	315	1630	311	1650	311	1650
447.dealII	64	978	748	978	748	978	748	64	965	759	964	759	964	759
450.soplex	64	1292	413	1303	410	1280	417	64	1248	428	1229	434	1214	440
453.povray	64	569	598	570	597	570	598	64	503	677	503	677	503	676
454.calculix	64	573	921	574	920	574	920	64	562	939	562	939	563	938
459.GemsFDTD	64	1818	374	1816	374	1825	372	64	1821	373	1812	375	1836	370
465.tonto	64	863	730	861	731	862	730	64	855	737	855	737	856	736
470.lbm	64	1499	587	1500	586	1500	586	64	1488	591	1486	592	1487	591
481.wrf	64	998	716	994	719	1003	713	64	1006	711	994	719	996	718
482.sphinx3	64	952	1310	966	1290	946	1320	64	919	1360	949	1310	925	1350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Processes are bound to CPUs using numactl and taskset.
limit stacksize unlimited
Memory system is in "Non Mirror Mode".

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580

SPECfp_rate2006 = 700
SPECfp_rate_base2006 = 678

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Aug-2006

Software Availability: Apr-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:
 `ifort`

Benchmarks using both Fortran and C:
 `icc ifort`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 `-fast -IPF_fp_relaxed -ansi-alias`

C++ benchmarks:
 `-fast -IPF_fp_relaxed -ansi-alias`

Fortran benchmarks:
 `-fast -IPF_fp_relaxed`

Benchmarks using both Fortran and C:
 `-fast -IPF_fp_relaxed -ansi-alias`

Peak Compiler Invocation

C benchmarks:
 `icc`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580

SPECfp_rate2006 = 700
SPECfp_rate_base2006 = 678

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Aug-2006

Software Availability: Apr-2007

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF_fp_relaxed -auto-ilp32 -ansi-alias -fno-alias
-inline-min-size=2750 -inline-max-size=2750

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF_fp_relaxed

482.sphinx3: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF_fp_relaxed
-auto-ilp32

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -auto-ilp32
-fno-alias -no-prefetch

447.dealII: -fast -IPF_fp_relaxed -ansi-alias -mtune=itanium2-p9000
-fno-alias -no-alias-args

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -O2 -static -ipo
-ansi-alias -inline-factor=150

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias -inline-max-size=1000

Fortran benchmarks:

410.bwaves: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF_fp_relaxed

416.gamess: -fast -IPF_fp_relaxed -inline-max-size=100

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580

SPECfp_rate2006 = 700
SPECfp_rate_base2006 = 678

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2007

Hardware Availability: Aug-2006

Software Availability: Apr-2007

Peak Optimization Flags (Continued)

434.zeusmp: -fast -IPF_fp_relaxed

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: Same as 434.zeusmp

465.tonto: -fast -IPF_fp_relaxed -mtune=itanium2-p9000

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF_fp_relaxed
-fno-alias -inline-max-size=400 -inline-max-per-routine=400

436.cactusADM: -fast -IPF_fp_relaxed

454.calculix: -fast -IPF_fp_relaxed -fno-alias

481.wrf: -fast -IPF_fp_relaxed -inline-max-per-routine=100

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580.ipf.linux.flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580.ipf.linux.flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:15:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 May 2007.