



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 41.5

NovaScale T880 (2.60 GHz, Intel Xeon 7110M)

SPECfp_rate_base2006 = 40.9

CPU2006 license: 20


Test date: Apr-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

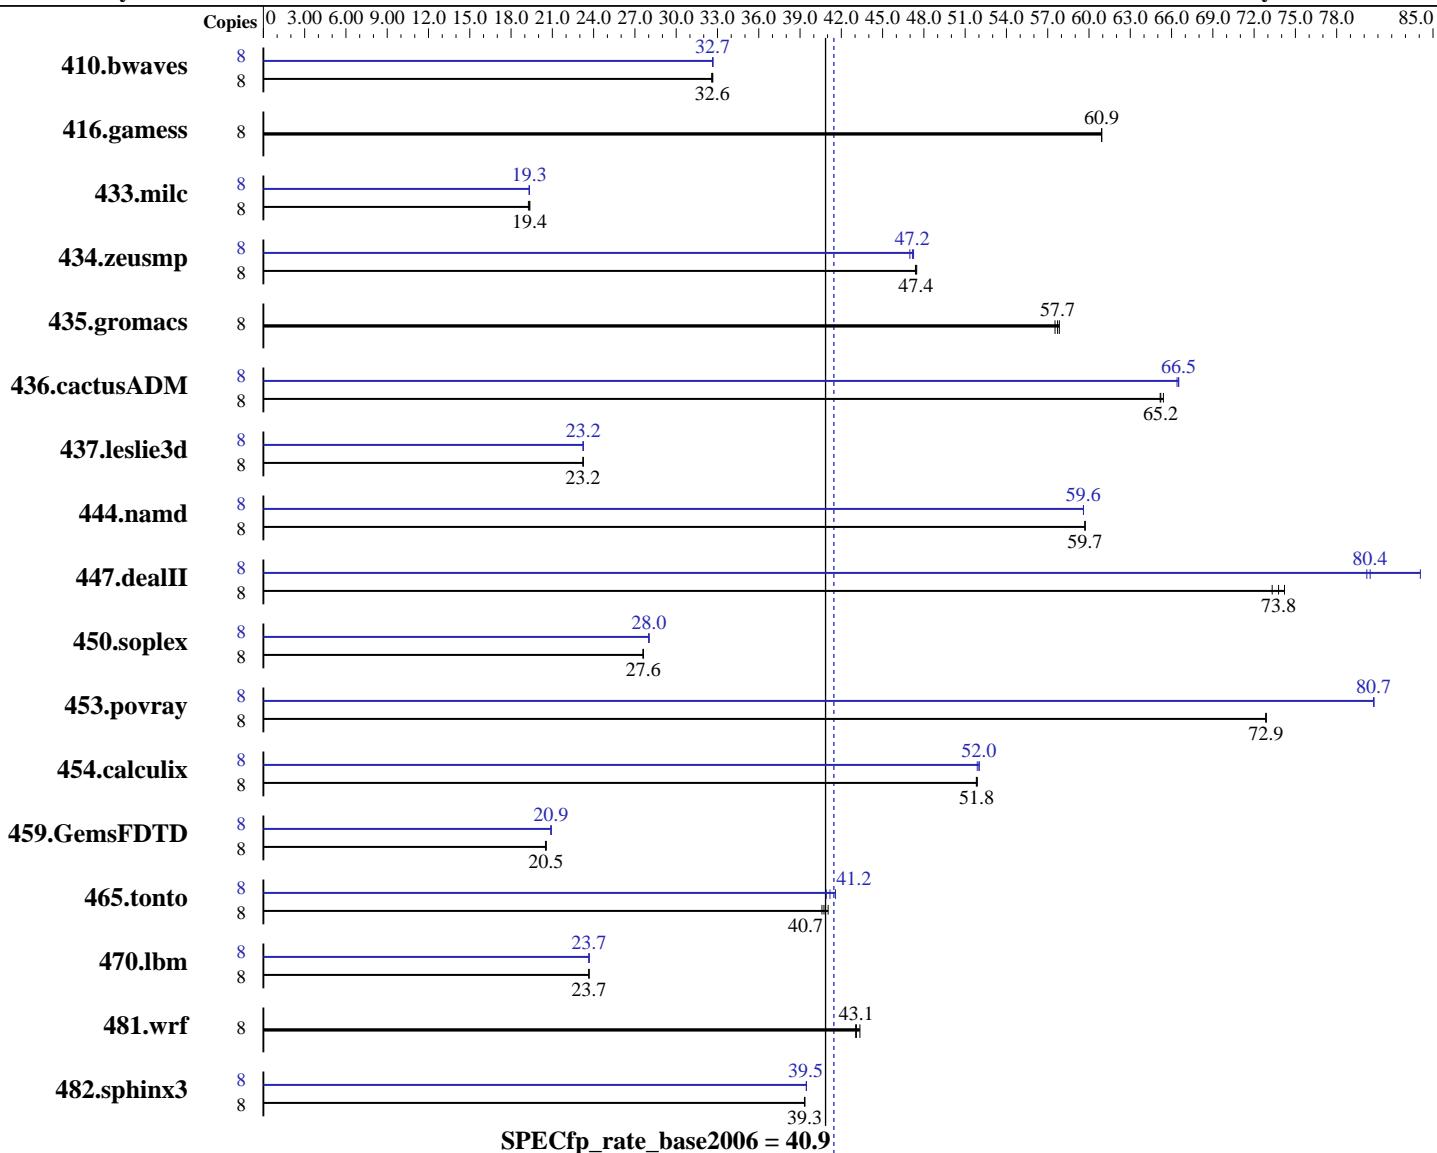

Hardware

CPU Name: Intel Xeon 7110M
CPU Characteristics: 2.6 GHz, 800 MHz bus
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
CPU(s) orderable: 1,2,4 chips
Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: Windows Server 2003 Enterprise X64 Edition
Compiler: Intel C++ Compiler for IA32 version 9.1
Package ID W_CC_C_9.1.033 Build no 20061103Z
Intel Fortran Compiler for IA32 version 9.1
Package ID W_FC_C_9.1.033 Build no 20061103Z
Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel: No
File System: NTFS
System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 41.5

NovaScale T880 (2.60 GHz, Intel Xeon 7110M)

SPECfp_rate_base2006 = 40.9

CPU2006 license: 20

Test date: Apr-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16x2 GB) DDR2 400 PC2-3200R-333
 Disk Subsystem: 2x36 GB SAS 15000 RPM
 Other Hardware: None

Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shlw32M.lib)

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3332	32.6	3337	32.6	3329	32.7	8	3331	32.6	3327	32.7	3329	32.7
416.gamess	8	2571	60.9	2571	60.9	2571	60.9	8	2571	60.9	2571	60.9	2571	60.9
433.milc	8	3794	19.4	3795	19.4	3813	19.3	8	3800	19.3	3800	19.3	3800	19.3
434.zeusmp	8	1536	47.4	1535	47.4	1533	47.5	8	1541	47.3	1550	47.0	1543	47.2
435.gromacs	8	990	57.7	993	57.5	987	57.8	8	990	57.7	993	57.5	987	57.8
436.cactusADM	8	1466	65.2	1467	65.2	1462	65.4	8	1437	66.5	1440	66.4	1437	66.5
437.leslie3d	8	3237	23.2	3235	23.2	3236	23.2	8	3235	23.2	3235	23.2	3236	23.2
444.namd	8	1074	59.7	1074	59.7	1075	59.7	8	1077	59.6	1077	59.6	1077	59.6
447.dealII	8	1233	74.2	1240	73.8	1248	73.3	8	1141	80.2	1088	84.1	1138	80.4
450.soplex	8	2418	27.6	2416	27.6	2417	27.6	8	2380	28.0	2381	28.0	2382	28.0
453.povray	8	584	72.9	584	72.8	584	72.9	8	527	80.7	527	80.7	527	80.7
454.calculix	8	1273	51.8	1272	51.9	1274	51.8	8	1269	52.0	1272	51.9	1269	52.0
459.GemsFDTD	8	4130	20.6	4132	20.5	4141	20.5	8	4062	20.9	4058	20.9	4060	20.9
465.tonto	8	1932	40.7	1939	40.6	1918	41.0	8	1912	41.2	1924	40.9	1893	41.6
470.lbm	8	4645	23.7	4647	23.7	4645	23.7	8	4646	23.7	4647	23.7	4642	23.7
481.wrf	8	2073	43.1	2061	43.4	2076	43.0	8	2073	43.1	2061	43.4	2076	43.0
482.sphinx3	8	3962	39.4	3963	39.3	3965	39.3	8	3951	39.5	3951	39.5	3951	39.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes

Hyper-Threading technology was disabled in the Bios.

The NovaScale T880 and the NovaScale R480 models are electronically equivalent.

The results have been measured on a NovaScale R480 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T880 (2.60 GHz, Intel Xeon 7110M)

SPECfp_rate2006 = 41.5

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc7.1 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

```
-fast /F9500000000 shlw32m.lib -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-fast -Qcxx_features /F9500000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-fast /F9500000000 -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
-fast /F9500000000 -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T880 (2.60 GHz, Intel Xeon 7110M)

SPECfp_rate2006 = 41.5

SPECfp_rate_base2006 = 40.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

Peak Compiler Invocation (Continued)

Fortran benchmarks:
fort

Benchmarks using both Fortran and C:
icl -Qvc7.1 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F9500000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000
-link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: Same as 410.bwaves

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 41.5

NovaScale T880 (2.60 GHz, Intel Xeon 7110M)

SPECfp_rate_base2006 = 40.9

CPU2006 license: 20

Test date: Apr-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

436.cactusADM: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

454.calculix: Same as 436.cactusADM

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:48:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 May 2007.