



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECfp<sup>®</sup>\_rate2006 = 40.7

### PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz

### SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: May-2007

Software Availability: Mar-2007

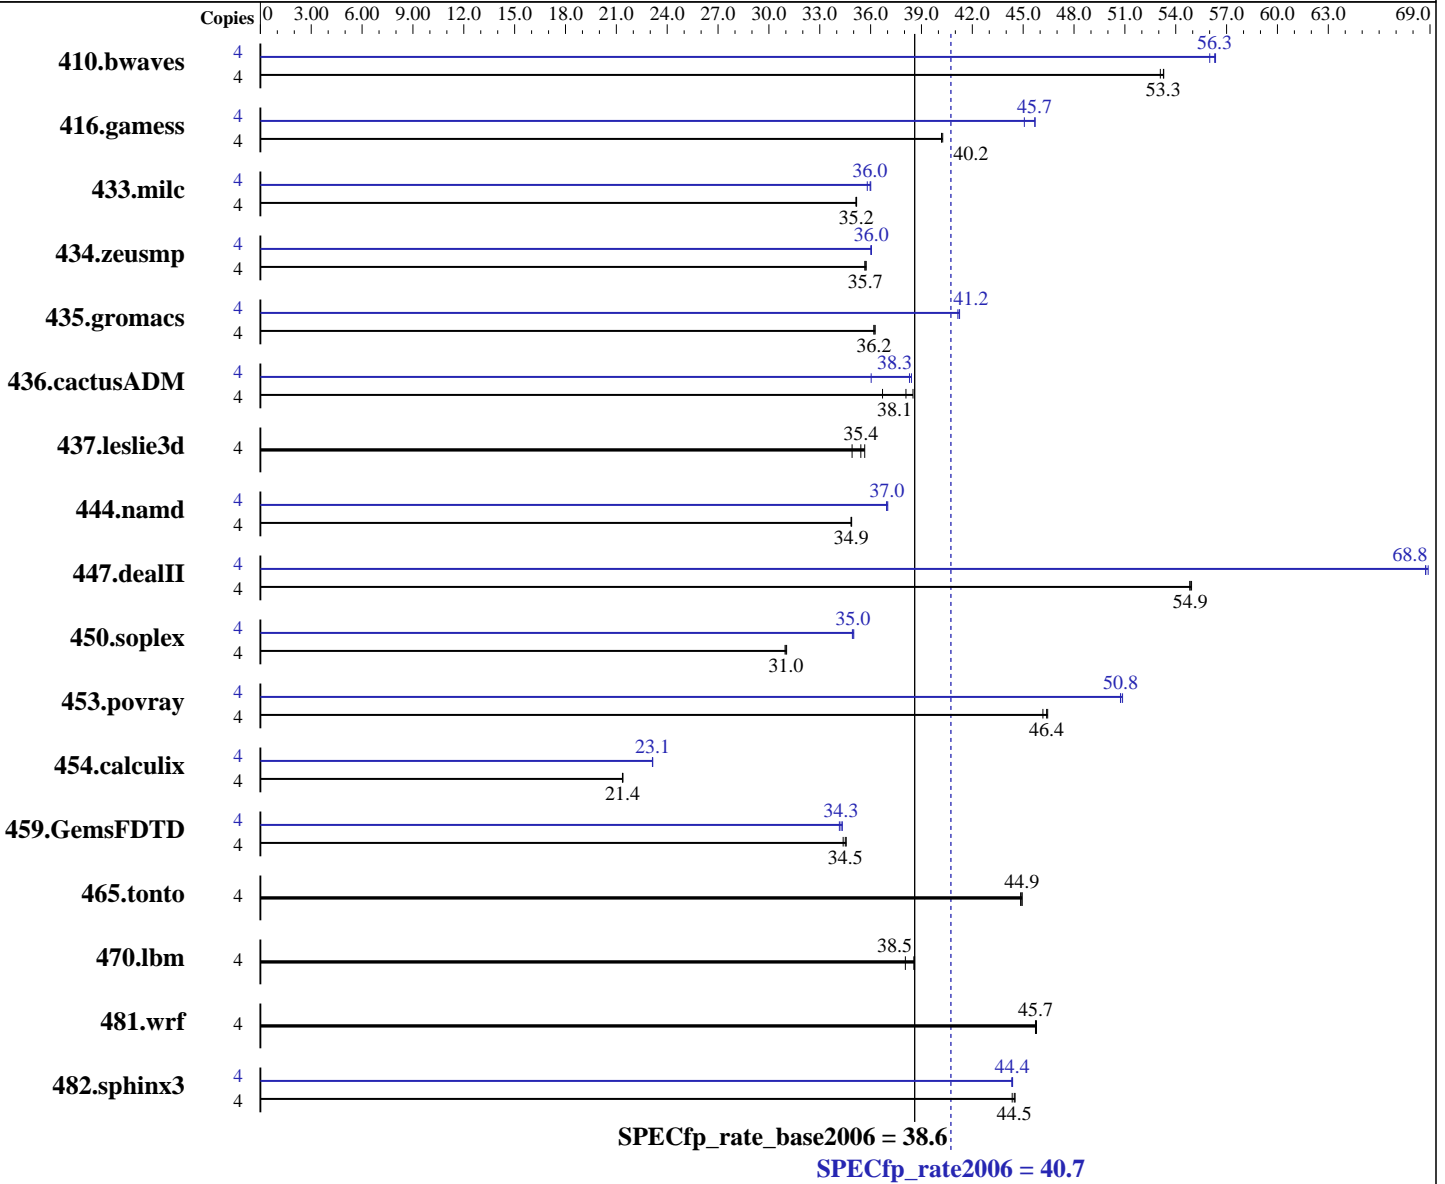

**Hardware**

CPU Name: AMD Opteron 2212  
 CPU Characteristics: 2212  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

*Continued on next page*

**Software**

Operating System: SLES 10 for AMD64/EM64T  
 Compiler: QLogic PathScale Compiler Suite, - Release 3.0  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp\_rate2006 = **40.7**

PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz

SPECfp\_rate\_base2006 = **38.6**

CPU2006 license: 22

Test date: May-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (8x4 GB DDR2 PC2-5300P, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: SAS (36GB 15.4 krpm)  
 Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	<b>1020</b>	<b>53.3</b>	1024	53.1	1020	53.3	4	965	56.3	<b>966</b>	<b>56.3</b>	971	56.0		
416.gamess	4	1949	40.2	<b>1949</b>	<b>40.2</b>	1946	40.3	4	1714	45.7	1738	45.1	<b>1714</b>	<b>45.7</b>		
433.milc	4	<b>1044</b>	<b>35.2</b>	1045	35.1	1044	35.2	4	<b>1021</b>	<b>36.0</b>	1020	36.0	1026	35.8		
434.zeusmp	4	<b>1020</b>	<b>35.7</b>	1018	35.7	1021	35.7	4	1011	36.0	<b>1010</b>	<b>36.0</b>	1010	36.0		
435.gromacs	4	789	36.2	<b>789</b>	<b>36.2</b>	787	36.3	4	692	41.2	694	41.1	<b>693</b>	<b>41.2</b>		
436.cactusADM	4	<b>1255</b>	<b>38.1</b>	1242	38.5	1302	36.7	4	<b>1248</b>	<b>38.3</b>	1327	36.0	1245	38.4		
437.leslie3d	4	1055	35.7	<b>1061</b>	<b>35.4</b>	1077	34.9	4	1055	35.7	<b>1061</b>	<b>35.4</b>	1077	34.9		
444.namd	4	920	34.9	920	34.9	<b>920</b>	<b>34.9</b>	4	868	36.9	<b>868</b>	<b>37.0</b>	867	37.0		
447.dealII	4	833	54.9	<b>834</b>	<b>54.9</b>	835	54.8	4	<b>666</b>	<b>68.8</b>	666	68.7	664	68.9		
450.soplex	4	1078	31.0	<b>1076</b>	<b>31.0</b>	1075	31.0	4	<b>954</b>	<b>35.0</b>	955	34.9	953	35.0		
453.povray	4	458	46.4	461	46.2	<b>459</b>	<b>46.4</b>	4	419	50.7	<b>419</b>	<b>50.8</b>	418	50.9		
454.calculix	4	1543	21.4	<b>1544</b>	<b>21.4</b>	1545	21.4	4	1427	23.1	1426	23.1	<b>1426</b>	<b>23.1</b>		
459.GemsFDTD	4	<b>1230</b>	<b>34.5</b>	1234	34.4	1228	34.6	4	1236	34.3	<b>1239</b>	<b>34.3</b>	1243	34.2		
465.tonto	4	878	44.8	876	44.9	<b>876</b>	<b>44.9</b>	4	878	44.8	876	44.9	<b>876</b>	<b>44.9</b>		
470.lbm	4	1444	38.1	1424	38.6	<b>1426</b>	<b>38.5</b>	4	1444	38.1	1424	38.6	<b>1426</b>	<b>38.5</b>		
481.wrf	4	976	45.8	<b>977</b>	<b>45.7</b>	977	45.7	4	976	45.8	<b>977</b>	<b>45.7</b>	977	45.7		
482.sphinx3	4	1758	44.4	<b>1753</b>	<b>44.5</b>	1751	44.5	4	<b>1757</b>	<b>44.4</b>	1759	44.3	1757	44.4		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' has been used to bind processes to CPUs

## General Notes

BIOS settings:  
Node Interleave = disabled

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 40.7

PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 22

Test date: May-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast -OPT:malloc\_alg=1

Benchmarks using both Fortran and C:  
-Ofast -OPT:malloc\_alg=1



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECfp\_rate2006 = 40.7**

**PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz**

**SPECfp\_rate\_base2006 = 38.6**

**CPU2006 license:** 22

**Test date:** May-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2007

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Mar-2007

## Base Other Flags

C benchmarks:  
-IPA:max\_jobs=4

C++ benchmarks:  
-IPA:max\_jobs=4

Fortran benchmarks:  
-IPA:max\_jobs=4

Benchmarks using both Fortran and C:  
-IPA:max\_jobs=4

## Peak Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECfp\_rate2006 = 40.7**

**PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz**

**SPECfp\_rate\_base2006 = 38.6**

**CPU2006 license:** 22

**Test date:** May-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2007

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Mar-2007

## Peak Optimization Flags

### C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc\_alg=1

470.lbm: basepeak = yes

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -WOPT:aggstr=0 -m32

### C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-exceptions

447.deallI: -Ofast -static -INLINE:aggressive=on -OPT:malloc\_alg=1  
-m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10  
-LNO:full\_unroll=5 -ipa

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 40.7

PRIMERGY RX330 S1, AMD Opteron 2212, 2.0 GHz

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 22

Test date: May-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

## Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem\_opnds=on

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

Fortran benchmarks:

-IPA:max\_jobs=4

Benchmarks using both Fortran and C:

-IPA:max\_jobs=4

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.10.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.10.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:21:25 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 June 2007.