



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard PDSMA+**

**SPECint\_rate2006 = 39.9**

**SPECint\_rate\_base2006 = 33.1**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2007

Hardware Availability: May-2007

Software Availability: May-2007

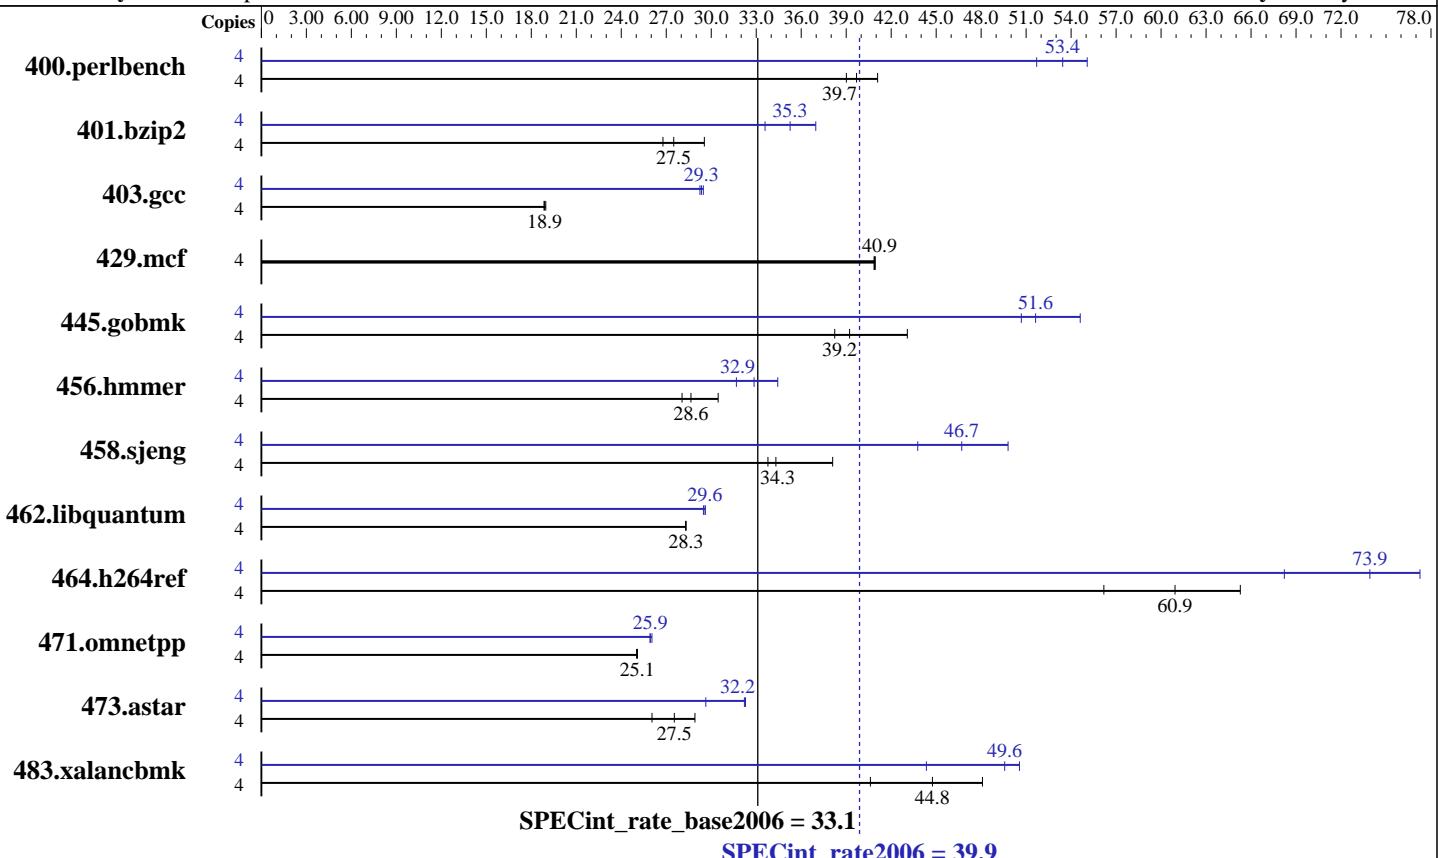

## Hardware

CPU Name: Intel Core 2 Extreme QX6700  
CPU Characteristics: 2.66GHz 1066 MHz System Bus  
CPU MHz: 2660  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4 X 2GB ECC PC2-5300, CL5, DDR2)  
Disk Subsystem: 250GB SATA, 7200RPM  
Other Hardware: None

## Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1  
Compiler: Intel C++ Compiler for IA32 version 10.0  
Build 20070426 Package ID: W\_CC\_P\_10.0.025  
Microsoft Visual Studio .Net 2003 (for libraries)  
Auto Parallel: No  
File System: NTFS  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro  
Motherboard PDSMA+

**SPECint\_rate2006 = 39.9**  
**SPECint\_rate\_base2006 = 33.1**

CPU2006 license: 001176

Test date: Jun-2007

Test sponsor: Supermicro

Hardware Availability: May-2007

Tested by: Supermicro

Software Availability: May-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>985</b>	<b>39.7</b>	1002	39.0	951	41.1	4	756	51.7	710	55.1	<b>731</b>	<b>53.4</b>
401.bzip2	4	<b>1404</b>	<b>27.5</b>	1441	26.8	1307	29.5	4	1149	33.6	1044	37.0	<b>1095</b>	<b>35.3</b>
403.gcc	4	<b>1705</b>	<b>18.9</b>	1708	18.8	1698	19.0	4	1097	<b>29.3</b>	1093	29.5	<b>1101</b>	29.2
429.mcf	4	893	40.9	<b>892</b>	<b>40.9</b>	891	40.9	4	893	40.9	<b>892</b>	<b>40.9</b>	891	40.9
445.gobmk	4	1097	38.2	<b>1070</b>	<b>39.2</b>	974	43.1	4	813	<b>51.6</b>	768	54.6	828	50.7
456.hammer	4	<b>1303</b>	<b>28.6</b>	1330	28.1	1225	30.5	4	1136	<b>32.9</b>	1084	34.4	<b>1178</b>	31.7
458.sjeng	4	<b>1411</b>	<b>34.3</b>	1433	33.8	1270	38.1	4	1036	<b>46.7</b>	972	49.8	<b>1106</b>	43.8
462.libquantum	4	2927	28.3	<b>2928</b>	<b>28.3</b>	2929	28.3	4	2800	29.6	2811	29.5	<b>2801</b>	<b>29.6</b>
464.h264ref	4	1576	56.2	<b>1453</b>	<b>60.9</b>	1356	65.3	4	1197	<b>73.9</b>	1146	77.3	1298	68.2
471.omnetpp	4	<b>997</b>	<b>25.1</b>	999	25.0	997	25.1	4	964	<b>25.9</b>	960	26.0	964	25.9
473.astar	4	1078	26.0	<b>1020</b>	<b>27.5</b>	971	28.9	4	872	<b>32.2</b>	870	32.3	<b>947</b>	29.6
483.xalancbmk	4	680	40.6	<b>617</b>	<b>44.8</b>	574	48.1	4	546	50.6	<b>557</b>	<b>49.6</b>	622	44.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with CSE-733T-450 case,  
 Product description located as of <http://www.supermicro.com/products/motherboard/Xeon3000/3000/PDSMA+.cfm>  
 The system bus runs at 1066 MHz  
 "start /b /wait /affinity" used to bind processes to CPUs.

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib
```

```
-link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard PDSMA+

**SPECint\_rate2006 = 39.9**

**SPECint\_rate\_base2006 = 33.1**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2007

**Hardware Availability:** May-2007

**Software Availability:** May-2007

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

## Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
-Qprefetch /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000  
shlw32m.lib  
-link /FORCE:MULTIPLE
```

```
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000  
-link /FORCE:MULTIPLE
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo  
-Qprec_div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro  
Motherboard PDSMA+

SPECint\_rate2006 = 39.9  
SPECint\_rate\_base2006 = 33.1

CPU2006 license: 001176

Test date: Jun-2007

Test sponsor: Supermicro

Hardware Availability: May-2007

Tested by: Supermicro

Software Availability: May-2007

## Peak Optimization Flags (Continued)

456.hmmer: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll12  
-Qansi-alias /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

458.sjeng: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll14  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

462.libquantum: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll14  
-Ob0 -Qprefetch -Qopt-streaming-stores:always /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE

464.h264ref: Same as 456.hmmer

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 13:22:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 July 2007.