



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard X7DA3

**SPECint®2006 = 14.5**  
**SPECint\_base2006 = 13.8**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

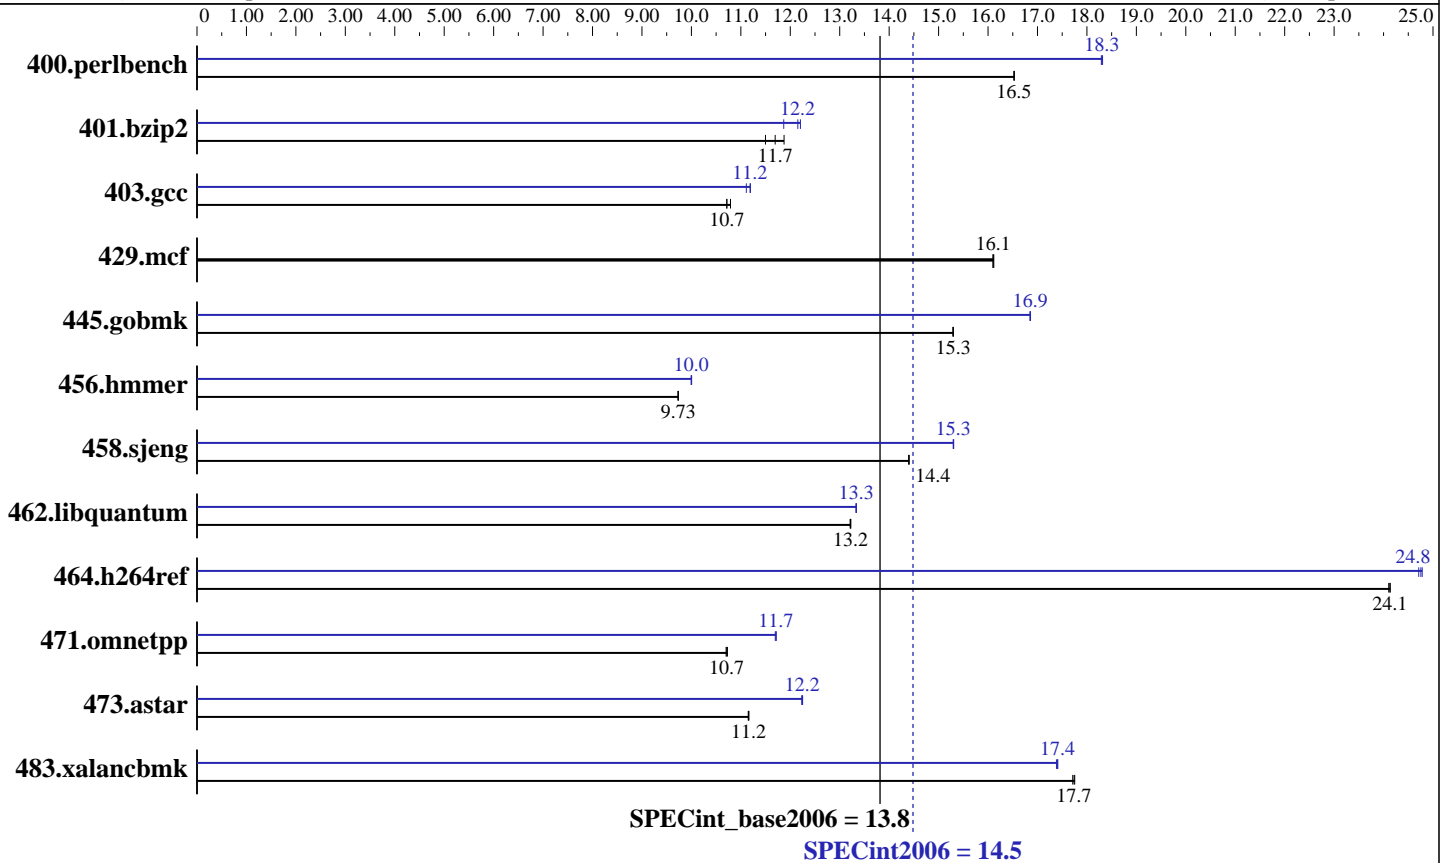

### Hardware

CPU Name: Intel Xeon 5148 LV  
 CPU Characteristics: 2.33GHz 1333 System Bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (2 X 2GB ECC, CL5, FBDIMM)  
 Disk Subsystem: Seagate ST3750640AS 750GB SATA II, 7200RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP2  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Build no 20070322Z  
 Microsoft Visual Studio .Net 2003 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard X7DA3

SPECint2006 = **14.5**  
SPECint\_base2006 = **13.8**

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jun-2007  
Hardware Availability: May-2007  
Software Availability: Apr-2007

### Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	591	16.5	<b>591</b>	<b>16.5</b>	591	16.5	534	18.3	<b>534</b>	<b>18.3</b>	533	18.3
401.bzip2	<b>825</b>	<b>11.7</b>	839	11.5	813	11.9	<b>794</b>	<b>12.2</b>	813	11.9	791	12.2
403.gcc	746	10.8	<b>751</b>	<b>10.7</b>	751	10.7	724	11.1	719	11.2	<b>720</b>	<b>11.2</b>
429.mcf	566	16.1	566	16.1	<b>566</b>	<b>16.1</b>	566	16.1	566	16.1	<b>566</b>	<b>16.1</b>
445.gobmk	686	15.3	<b>686</b>	<b>15.3</b>	686	15.3	<b>622</b>	<b>16.9</b>	623	16.8	622	16.9
456.hammer	959	9.73	958	9.73	<b>959</b>	<b>9.73</b>	<b>933</b>	<b>10.0</b>	933	10.0	933	10.0
458.sjeng	<b>840</b>	<b>14.4</b>	840	14.4	840	14.4	791	15.3	<b>791</b>	<b>15.3</b>	791	15.3
462.libquantum	<b>1567</b>	<b>13.2</b>	1568	13.2	1567	13.2	1554	13.3	<b>1554</b>	<b>13.3</b>	1554	13.3
464.h264ref	<b>917</b>	<b>24.1</b>	918	24.1	917	24.1	896	24.7	893	24.8	<b>894</b>	<b>24.8</b>
471.omnetpp	<b>583</b>	<b>10.7</b>	584	10.7	583	10.7	<b>534</b>	<b>11.7</b>	534	11.7	534	11.7
473.astar	<b>629</b>	<b>11.2</b>	630	11.1	629	11.2	574	12.2	<b>573</b>	<b>12.2</b>	573	12.2
483.xalancbmk	389	17.8	390	17.7	<b>389</b>	<b>17.7</b>	397	17.4	396	17.4	<b>396</b>	<b>17.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### General Notes

Tested systems can be used with CSE-825TQ-R700LPV case,  
Product description located as of  
<http://www.supermicro.com/products/motherboard/Xeon1333/5000X/X7DA3.cfm>  
The system bus runs at 1333 MHz

### Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
  
C++ benchmarks:  
icl -Qvc7.1

### Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

### Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard X7DA3**

<b>SPECint2006 =</b>	<b>14.5</b>
<b>SPECint_base2006 =</b>	<b>13.8</b>

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jun-2007  
**Hardware Availability:** May-2007  
**Software Availability:** Apr-2007

## Base Optimization Flags (Continued)

C++ benchmarks:  
 -fast -Qcxx\_features /F512000000 shlw32m.lib  
 -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
 403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
 icl -Qvc7.1 -Qc99

C++ benchmarks:  
 icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
 464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: Same as 400.perlbench

456.hmmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard X7DA3**

**SPECint2006 = 14.5**  
**SPECint\_base2006 = 13.8**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jun-2007  
**Hardware Availability:** May-2007  
**Software Availability:** Apr-2007

## Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxP -O2 -Qipo  
-Qprec-div- -Qunroll14 -Ob2 -Qsfsalign16 -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: Same as 471.omnetpp

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:53:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 August 2007.