



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 65.6

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate_base2006 = 62.2

CPU2006 license: 55


Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

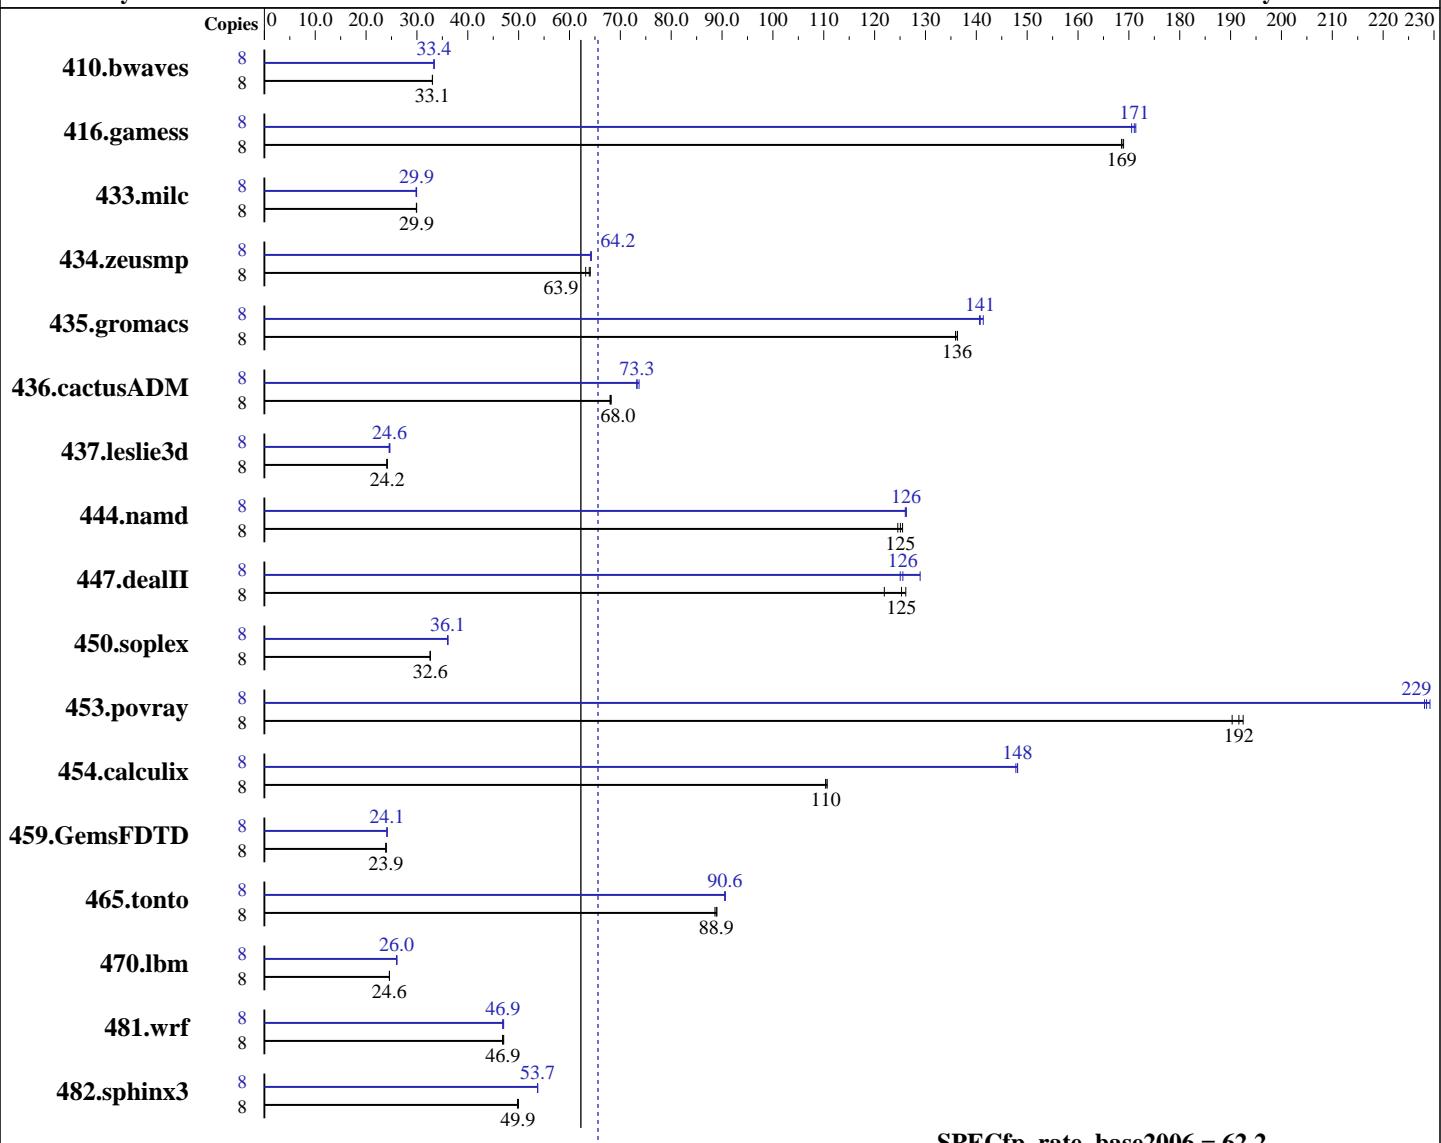

SPECfp_rate_base2006 = 62.2

SPECfp_rate2006 = 65.6

Hardware

CPU Name: Intel Xeon X5365
CPU Characteristics: 1333MHz system bus
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10
Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel: No
File System: ReiserFS
System State: Multi-user, run level 3
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 65.6

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate_base2006 = 62.2

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

Other Software: SmartHeap library V8.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3292	33.0	3288	33.1	<u>3289</u>	<u>33.1</u>	8	3260	33.4	<u>3258</u>	<u>33.4</u>	3257	33.4
416.gamess	8	929	169	<u>929</u>	<u>169</u>	927	169	8	919	171	914	171	<u>916</u>	<u>171</u>
433.milc	8	2453	29.9	2457	29.9	<u>2454</u>	<u>29.9</u>	8	2453	29.9	<u>2455</u>	<u>29.9</u>	2463	29.8
434.zeusmp	8	<u>1139</u>	<u>63.9</u>	1152	63.2	1136	64.1	8	1132	64.3	1134	64.2	<u>1134</u>	<u>64.2</u>
435.gromacs	8	419	136	420	136	<u>419</u>	<u>136</u>	8	404	141	<u>406</u>	<u>141</u>	406	141
436.cactusADM	8	<u>1405</u>	<u>68.0</u>	1402	68.2	1406	68.0	8	<u>1304</u>	<u>73.3</u>	1298	73.7	1306	73.2
437.leslie3d	8	3125	24.1	3113	24.2	<u>3114</u>	<u>24.2</u>	8	3066	24.5	3048	24.7	<u>3053</u>	<u>24.6</u>
444.namd	8	515	125	511	126	<u>513</u>	<u>125</u>	8	509	126	<u>508</u>	<u>126</u>	508	126
447.dealII	8	726	126	751	122	<u>730</u>	<u>125</u>	8	710	129	732	125	<u>729</u>	<u>126</u>
450.soplex	8	<u>2045</u>	<u>32.6</u>	2044	32.6	2046	32.6	8	1848	36.1	<u>1850</u>	<u>36.1</u>	1852	36.0
453.povray	8	224	190	221	192	<u>222</u>	<u>192</u>	8	<u>186</u>	<u>229</u>	187	228	186	229
454.calculix	8	598	110	596	111	<u>598</u>	<u>110</u>	8	446	148	447	148	<u>446</u>	<u>148</u>
459.GemsFDTD	8	3554	23.9	3540	24.0	<u>3552</u>	<u>23.9</u>	8	3518	24.1	3521	24.1	<u>3519</u>	<u>24.1</u>
465.tonto	8	<u>886</u>	<u>88.9</u>	885	89.0	888	88.6	8	<u>869</u>	<u>90.6</u>	868	90.6	869	90.5
470.lbm	8	4468	24.6	<u>4468</u>	<u>24.6</u>	4472	24.6	8	<u>4223</u>	<u>26.0</u>	4223	26.0	4223	26.0
481.wrf	8	1908	46.8	1899	47.1	<u>1904</u>	<u>46.9</u>	8	1899	47.1	1907	46.9	<u>1904</u>	<u>46.9</u>
482.sphinx3	8	3133	49.8	<u>3127</u>	<u>49.9</u>	3121	50.0	8	<u>2903</u>	<u>53.7</u>	<u>2903</u>	<u>53.7</u>	2900	53.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
 KMP_STACK_SIZE set to 64M
 KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 '/usr/bin/taskset' used to bind processes to CPUs



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate2006 = 65.6

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetch = Disabled (default Enabled)
Hardware Prefetcher = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate2006 = 65.6

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate2006 = 65.6

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate2006 = 65.6

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Sep-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:04:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 October 2007.