



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard C2SBA+

SPECfp<sup>®</sup>\_rate2006 = 29.0

SPECfp\_rate\_base2006 = 28.2

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2007

Hardware Availability: Jul-2007

Software Availability: May-2007

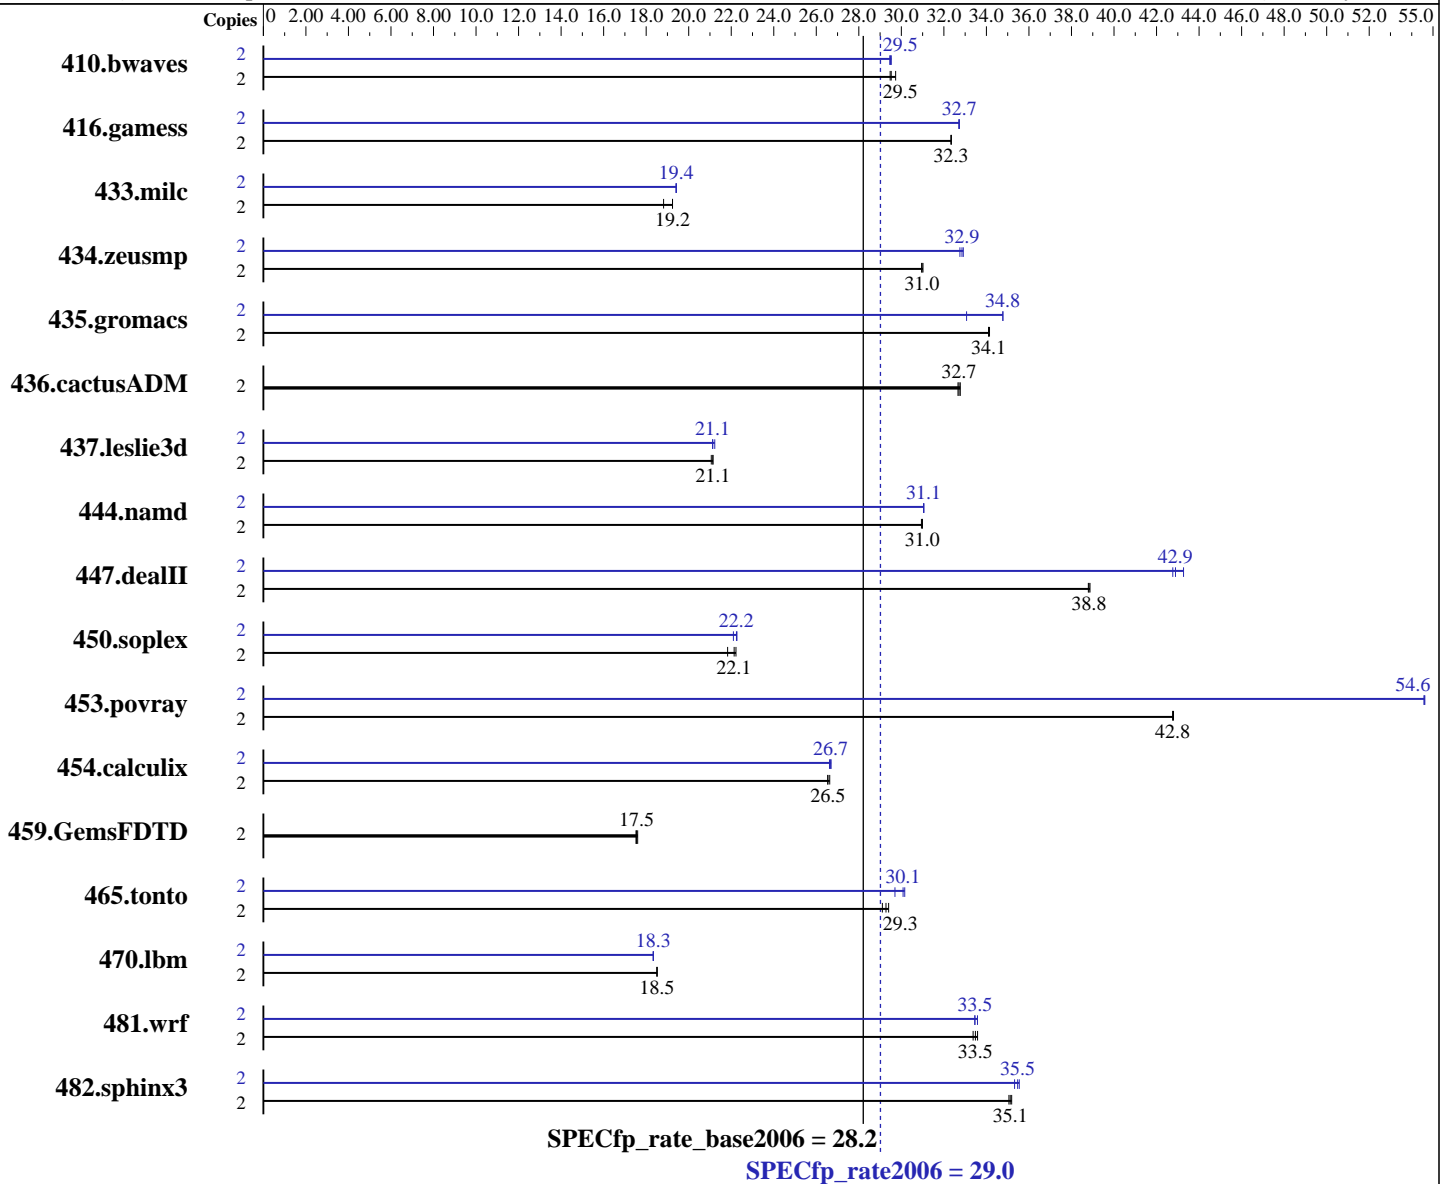

### Hardware

CPU Name: Intel Core 2 Duo E6850  
 CPU Characteristics: 3.00GHz, 1333MHz Bus  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Windows Vista Ultimate (32-bit)  
 Compiler: Intel C++ Compiler for IA32 version 10.0  
 Build 20070426 Package ID: W\_CC\_P\_10.0.025  
 Intel Fortran Compiler for IA32 version 10.0  
 Build 20070426 Package ID: W\_FC\_P\_10.0.025  
 Microsoft Visual Studio .Net 2003 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard C2SBA+

SPECfp\_rate2006 = 29.0

SPECfp\_rate\_base2006 = 28.2

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2007

Hardware Availability: Jul-2007

Software Availability: May-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4 X 2GB PC2-6400, CL5)  
Disk Subsystem: 74GB SATA, 7200RPM  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.0 from  
<http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	914	29.7	922	29.5	<u>921</u>	<u>29.5</u>	2	<u>922</u>	<u>29.5</u>	921	29.5	923	29.5
416.gamess	2	1211	32.3	<u>1211</u>	<u>32.3</u>	1211	32.3	2	<u>1197</u>	<u>32.7</u>	1197	32.7	1197	32.7
433.milc	2	976	18.8	954	19.2	<u>954</u>	<u>19.2</u>	2	946	19.4	<u>946</u>	<u>19.4</u>	946	19.4
434.zeusmp	2	<u>588</u>	<u>31.0</u>	588	31.0	587	31.0	2	553	32.9	556	32.8	<u>554</u>	<u>32.9</u>
435.gromacs	2	419	34.1	<u>419</u>	<u>34.1</u>	418	34.1	2	411	34.8	432	33.1	<u>411</u>	<u>34.8</u>
436.cactusADM	2	729	32.8	<u>731</u>	<u>32.7</u>	732	32.7	2	729	32.8	<u>731</u>	<u>32.7</u>	732	32.7
437.leslie3d	2	<u>889</u>	<u>21.1</u>	889	21.1	893	21.1	2	886	21.2	890	21.1	<u>890</u>	<u>21.1</u>
444.namd	2	518	30.9	518	31.0	<u>518</u>	<u>31.0</u>	2	516	31.1	517	31.0	<u>517</u>	<u>31.1</u>
447.dealII	2	589	38.9	<u>589</u>	<u>38.8</u>	590	38.8	2	529	43.3	535	42.8	<u>533</u>	<u>42.9</u>
450.soplex	2	751	22.2	764	21.8	<u>753</u>	<u>22.1</u>	2	755	22.1	749	22.3	<u>750</u>	<u>22.2</u>
453.povray	2	<u>249</u>	<u>42.8</u>	249	42.8	249	42.8	2	195	54.6	195	54.6	<u>195</u>	<u>54.6</u>
454.calculix	2	620	26.6	<u>622</u>	<u>26.5</u>	622	26.5	2	<u>619</u>	<u>26.7</u>	618	26.7	620	26.6
459.GemsFDTD	2	1211	17.5	1206	17.6	<u>1209</u>	<u>17.5</u>	2	1211	17.5	1206	17.6	<u>1209</u>	<u>17.5</u>
465.tonto	2	676	29.1	669	29.4	<u>672</u>	<u>29.3</u>	2	663	29.7	<u>654</u>	<u>30.1</u>	653	30.2
470.lbm	2	1484	18.5	<u>1485</u>	<u>18.5</u>	1485	18.5	2	1499	18.3	1498	18.3	<u>1499</u>	<u>18.3</u>
481.wrf	2	669	33.4	<u>667</u>	<u>33.5</u>	665	33.6	2	668	33.5	665	33.6	<u>668</u>	<u>33.5</u>
482.sphinx3	2	1112	35.1	<u>1110</u>	<u>35.1</u>	1108	35.2	2	1097	35.5	1103	35.3	<u>1099</u>	<u>35.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with case CSE-733i-450

To ensure system stability, a 420W (minimum) ATX power supply [4-pin +12V AND (20 or 24-pin)] is required.

Product description located at:

<http://www.supermicro.com/products/motherboard/Core2Duo/G33/C2SBA+II.cfm>

The system bus runs at 1333 MHz

BIOS Setting : Default

## Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard C2SBA+**

**SPECfp\_rate2006 = 29.0**

**SPECfp\_rate\_base2006 = 28.2**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2007  
**Hardware Availability:** Jul-2007  
**Software Availability:** May-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-fast /F950000000

Benchmarks using both Fortran and C:  
-fast /F950000000

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard C2SBA+**

**SPECfp\_rate2006 = 29.0**

**SPECfp\_rate\_base2006 = 28.2**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2007  
**Hardware Availability:** Jul-2007  
**Software Availability:** May-2007

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2 -Oa  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE  
470.lbm: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qscalar-rep- -Qprefetch /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
482.sphinx3: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Oa  
-Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
447.dealII: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qprefetch  
-Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
450.soplex: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE  
453.povray: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard C2SBA+**

**SPECfp\_rate2006 = 29.0**

**SPECfp\_rate\_base2006 = 28.2**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2007  
**Hardware Availability:** Jul-2007  
**Software Availability:** May-2007

## Peak Optimization Flags (Continued)

410.bwaves: -fast /F950000000

416.gamess: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2 -Ob0  
-Qansi-alias -Qscalar-rep- /F950000000

434.zeusmp: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qprec\_div-  
-Qunroll10 -Qscalar-rep- /F950000000

437.leslie3d: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000

459.GemsFDTD: basepeak = yes

465.tonto: Same as 437.leslie3d

Benchmarks using both Fortran and C:

435.gromacs: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Oa  
/F950000000

436.cactusADM: basepeak = yes

454.calculix: -fast /F950000000

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:56:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 October 2007.