



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp®\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

CPU2006 license: 97


Test date: Sep-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Aug-2007

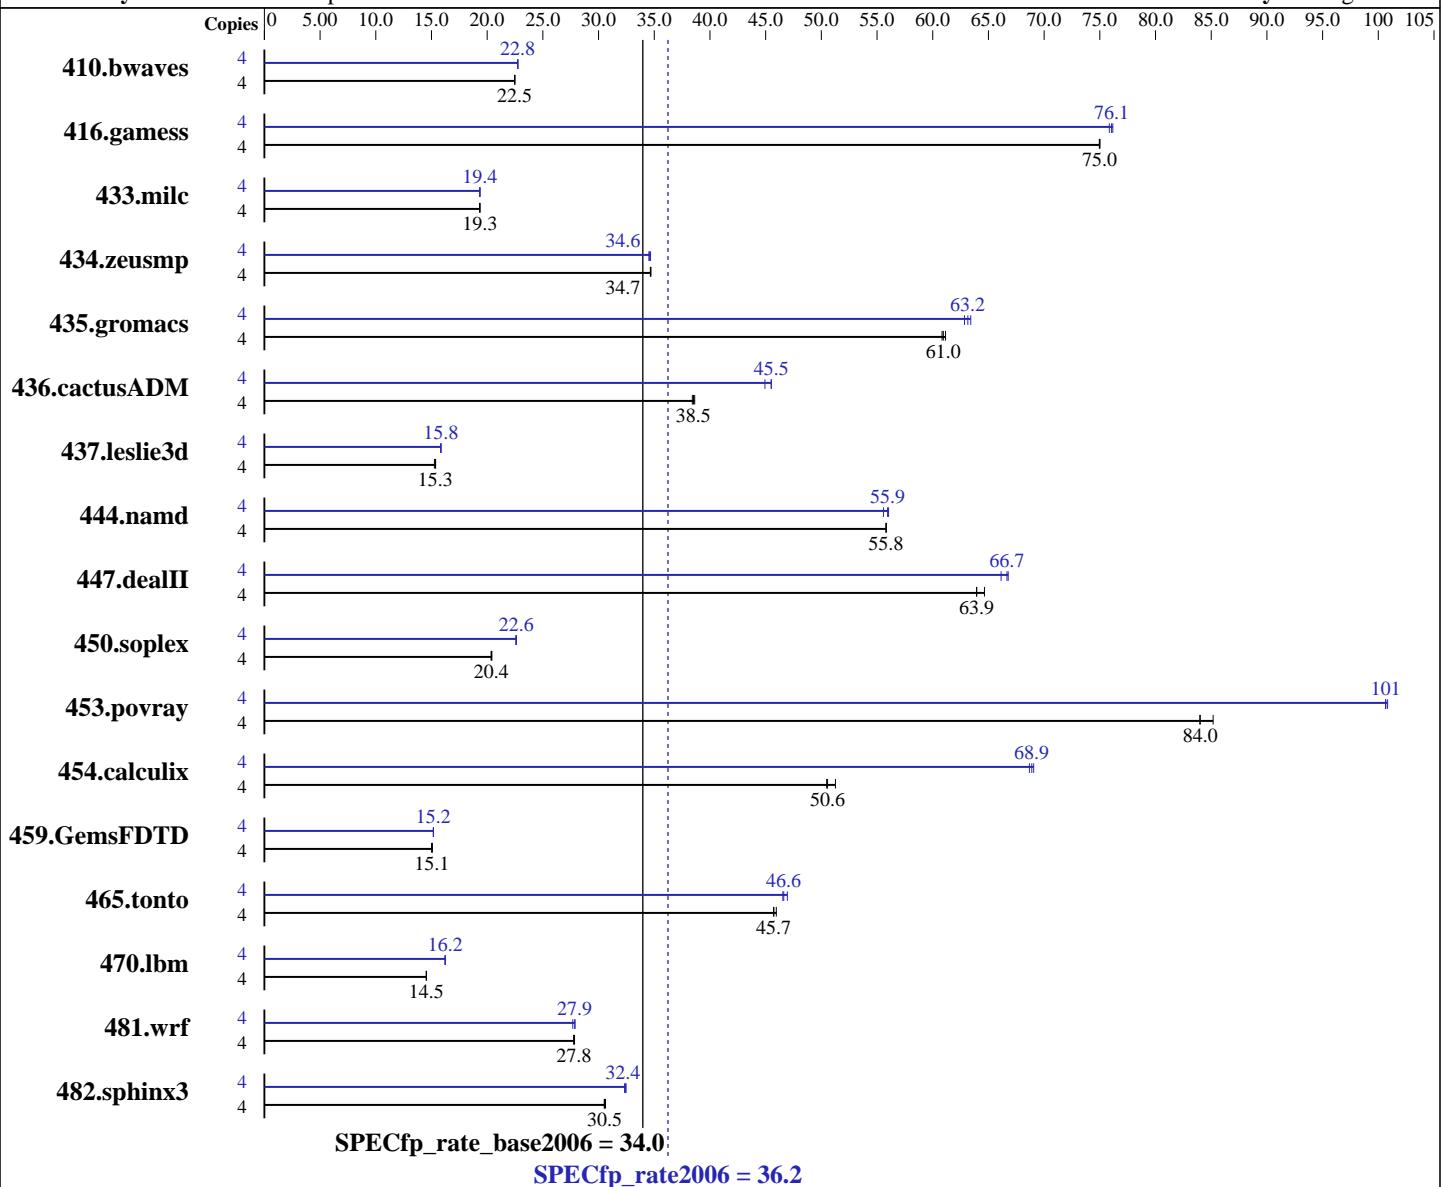

## Hardware

CPU Name: Intel Xeon X5355  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

## Software

Operating System: SuSE Linux Enterprise Server 10 EM64T (kernel 2.6.16.21-0.8-smp)  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, level 3  
 Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

CPU2006 license: 97

Test date: Sep-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Aug-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)  
 Disk Subsystem: 1 x 73GB 10000PRM SAS HDD  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 8.1

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2420	22.5	2417	22.5	<b>2418</b>	<b>22.5</b>	4	<b>2389</b>	<b>22.8</b>	2390	22.7	2389	22.8
416.gamess	4	1045	75.0	<b>1045</b>	<b>75.0</b>	1044	75.0	4	1033	75.9	<b>1030</b>	<b>76.1</b>	1028	76.2
433.milc	4	1897	19.4	<b>1898</b>	<b>19.3</b>	1901	19.3	4	<b>1898</b>	<b>19.4</b>	1897	19.4	1900	19.3
434.zeusmp	4	1049	34.7	1050	34.7	<b>1050</b>	<b>34.7</b>	4	<b>1053</b>	<b>34.6</b>	1050	34.7	1054	34.5
435.gromacs	4	467	61.1	469	60.8	<b>469</b>	<b>61.0</b>	4	<b>452</b>	<b>63.2</b>	454	62.9	450	63.4
436.cactusADM	4	1237	38.6	1244	38.4	<b>1241</b>	<b>38.5</b>	4	<b>1051</b>	<b>45.5</b>	1064	44.9	1050	45.5
437.leslie3d	4	2446	15.4	2463	15.3	<b>2450</b>	<b>15.3</b>	4	<b>2373</b>	<b>15.8</b>	2375	15.8	2371	15.9
444.namd	4	575	55.8	<b>575</b>	<b>55.8</b>	575	55.8	4	573	56.0	577	55.6	<b>573</b>	<b>55.9</b>
447.dealII	4	708	64.6	716	63.9	<b>716</b>	<b>63.9</b>	4	685	66.8	692	66.1	<b>686</b>	<b>66.7</b>
450.soplex	4	1633	20.4	1638	20.4	<b>1638</b>	<b>20.4</b>	4	1478	22.6	<b>1476</b>	<b>22.6</b>	1474	22.6
453.povray	4	250	85.2	253	84.0	<b>253</b>	<b>84.0</b>	4	211	101	<b>211</b>	<b>101</b>	211	101
454.calculix	4	<b>653</b>	<b>50.6</b>	644	51.3	654	50.5	4	<b>479</b>	<b>68.9</b>	478	69.1	480	68.7
459.GemsFDTD	4	<b>2818</b>	<b>15.1</b>	2828	15.0	2814	15.1	4	2796	15.2	2798	15.2	<b>2797</b>	<b>15.2</b>
465.tonto	4	856	46.0	861	45.7	<b>861</b>	<b>45.7</b>	4	846	46.5	838	46.9	<b>844</b>	<b>46.6</b>
470.lbm	4	3780	14.5	<b>3780</b>	<b>14.5</b>	3779	14.5	4	<b>3386</b>	<b>16.2</b>	3386	16.2	3386	16.2
481.wrf	4	1605	27.8	1609	27.8	<b>1607</b>	<b>27.8</b>	4	1614	27.7	1602	27.9	<b>1604</b>	<b>27.9</b>
482.sphinx3	4	<b>2552</b>	<b>30.5</b>	2546	30.6	2555	30.5	4	2411	32.3	<b>2405</b>	<b>32.4</b>	2401	32.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

This result was measured on the Acer Altos R520  
 The Altos R720 and Altos R520 are electronically equivalent.

### BIOS Settings

Snoop Filter set to OFF

Snoop Filter preserves cache coherency while  
 minimizing snoops to remote nodes.

Adjacent Cache Line Prefetch set to OFF

Prefetch data in order to shorten execution cycles  
 and maximize data processing efficiency.

Optimization for high-frequency FSB applications set to ON

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

CPU2006 license: 97

Test date: Sep-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Aug-2007

## General Notes (Continued)

All results used taskset to bind processes to cores

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

CPU2006 license: 97

Test date: Sep-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Aug-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

CPU2006 license: 97

Test date: Sep-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2006

Tested by: Acer Incorporated

Software Availability: Aug-2007

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 36.2**

Acer Altos R720 (Intel X5355)

**SPECfp\_rate\_base2006 = 34.0**

**CPU2006 license:** 97

**Test date:** Sep-2007

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Nov-2006

**Tested by:** Acer Incorporated

**Software Availability:** Aug-2007

## Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.17.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.17.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:55:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 October 2007.