



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp®_rate2006 = 54.8

SPECfp_rate_base2006 = 53.4

CPU2006 license: 03


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

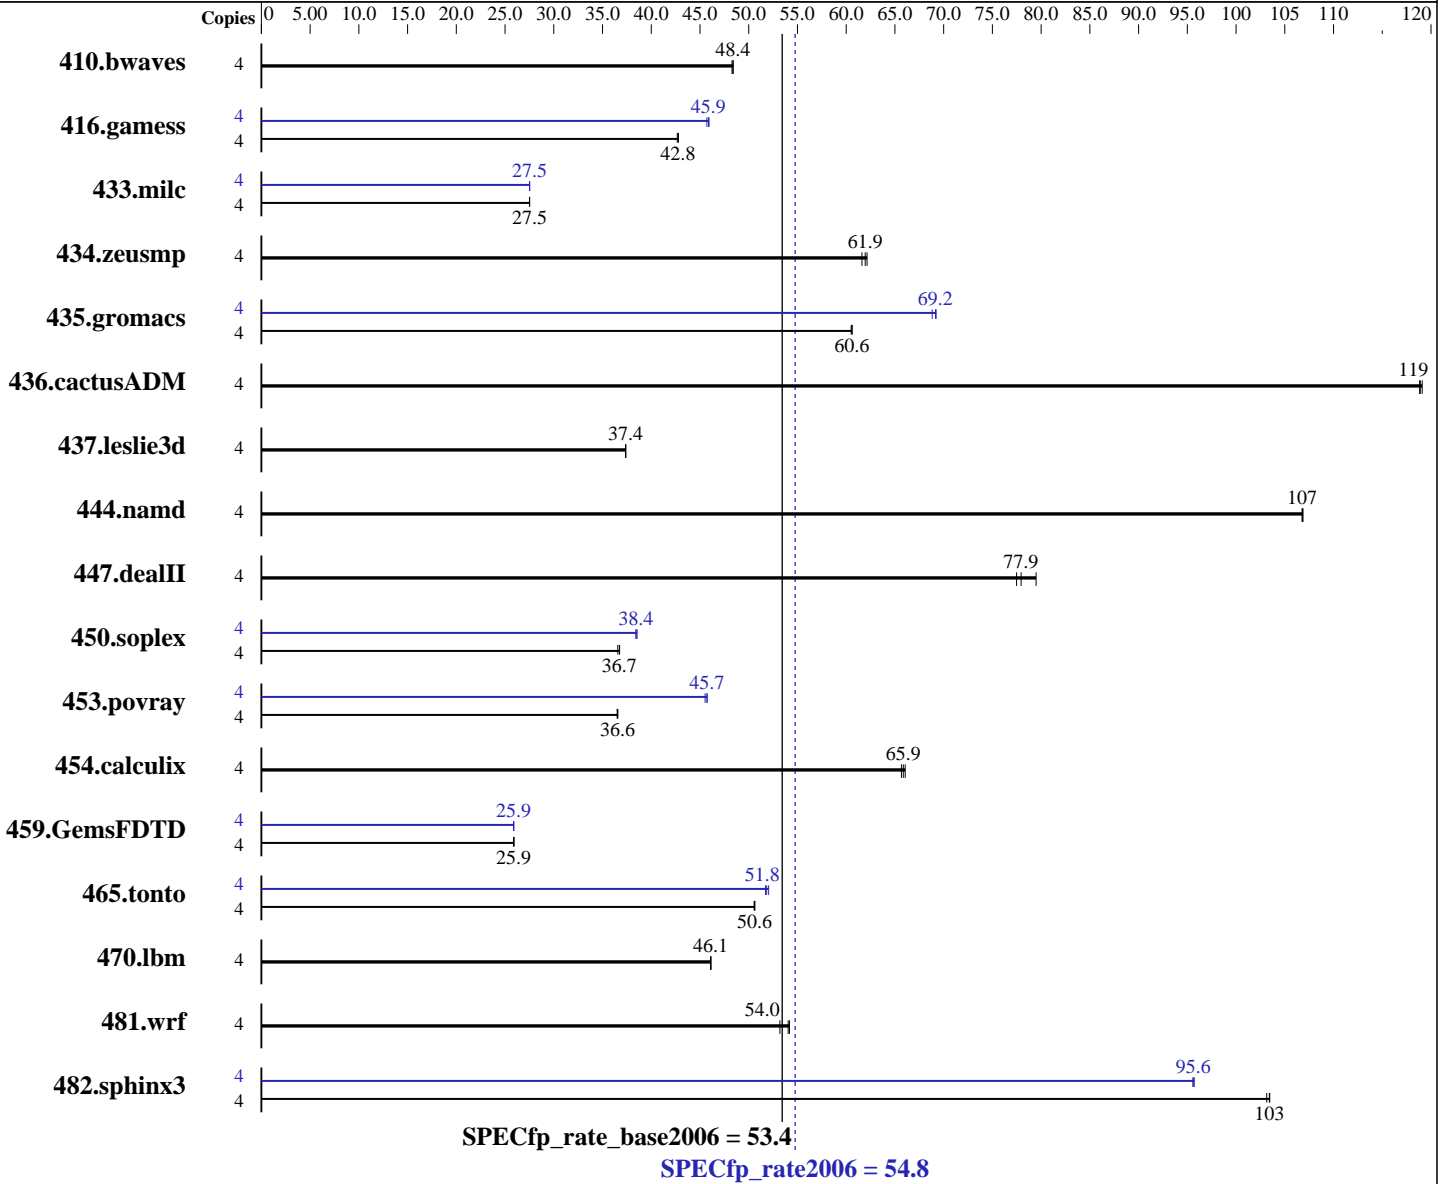

Hardware

CPU Name: Dual-Core Intel Itanium 9140M
 CPU Characteristics: 1.66GHz/18MB, 667MHz FSB
 CPU MHz: 1666
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1-2 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: HPUX11i-MCOE B.11.31 (LR)
 Compiler: HP C/aC++ Developer's Bundle C.11.31.03
 HP Fortran90 Compiler B.11.31.03
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill Smartheap 8.1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 54.8

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp_rate_base2006 = 53.4

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2007
Hardware Availability: Nov-2007
Software Availability: Sep-2007

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 16 GB (8x2GB DIMMs, AD124A 8-DIMM memory carrier)
Disk Subsystem: 73GB 10K RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1126	48.3	<u>1123</u>	<u>48.4</u>	1123	48.4	4	1126	48.3	<u>1123</u>	<u>48.4</u>	1123	48.4
416.gamess	4	1830	42.8	1835	42.7	<u>1832</u>	<u>42.8</u>	4	<u>1707</u>	<u>45.9</u>	1705	45.9	1713	45.7
433.milc	4	<u>1335</u>	<u>27.5</u>	1335	27.5	1334	27.5	4	<u>1334</u>	<u>27.5</u>	1334	27.5	1335	27.5
434.zeusmp	4	<u>588</u>	<u>61.9</u>	591	61.6	586	62.1	4	<u>588</u>	<u>61.9</u>	591	61.6	586	62.1
435.gromacs	4	<u>471</u>	<u>60.6</u>	471	60.6	472	60.5	4	415	68.8	<u>413</u>	<u>69.2</u>	413	69.2
436.cactusADM	4	402	119	401	119	<u>402</u>	<u>119</u>	4	402	119	401	119	<u>402</u>	<u>119</u>
437.leslie3d	4	<u>1006</u>	<u>37.4</u>	1006	37.4	1006	37.4	4	<u>1006</u>	<u>37.4</u>	1006	37.4	1006	37.4
444.namd	4	300	107	<u>300</u>	<u>107</u>	300	107	4	300	107	<u>300</u>	<u>107</u>	300	107
447.dealII	4	<u>587</u>	<u>77.9</u>	576	79.5	591	77.5	4	<u>587</u>	<u>77.9</u>	576	79.5	591	77.5
450.soplex	4	<u>908</u>	<u>36.7</u>	912	36.6	908	36.8	4	865	38.5	<u>868</u>	<u>38.4</u>	868	38.4
453.povray	4	582	36.6	583	36.5	<u>582</u>	<u>36.6</u>	4	467	45.5	<u>465</u>	<u>45.7</u>	465	45.7
454.calculix	4	<u>501</u>	<u>65.9</u>	500	66.1	503	65.7	4	<u>501</u>	<u>65.9</u>	500	66.1	503	65.7
459.GemsFDTD	4	1639	25.9	1638	25.9	<u>1639</u>	<u>25.9</u>	4	1639	25.9	1640	25.9	<u>1639</u>	<u>25.9</u>
465.tonto	4	<u>778</u>	<u>50.6</u>	777	50.6	779	50.6	4	756	52.0	761	51.7	<u>759</u>	<u>51.8</u>
470.lbm	4	1192	46.1	1193	46.1	<u>1192</u>	<u>46.1</u>	4	1192	46.1	1193	46.1	<u>1192</u>	<u>46.1</u>
481.wrf	4	<u>827</u>	<u>54.0</u>	840	53.2	825	54.2	4	<u>827</u>	<u>54.0</u>	840	53.2	825	54.2
482.sphinx3	4	756	103	<u>754</u>	<u>103</u>	754	103	4	815	95.7	<u>815</u>	<u>95.6</u>	816	95.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2007 HP-UX 11i v3 Mission Critical Operating Environment (MCOE) and compilers installed, along with the following patches:

```
PHSS_36349 linker + fdp cumulative patch
PHSS_36351 Math Library Cumulative Patch
PHSS_36352 Integrity Unwind Library
PHSS_36350 aC++ Runtime (A.06.15)
PHSS_36354 assembler patch
```

The following kernel tunables were set, in addition to the defaults set by the Mission Critical OE:

```
maxdsiz=3221225472
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp_rate2006 = 54.8

SPECfp_rate_base2006 = 53.4

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Operating System Notes (Continued)

maxssiz=401604608
maxrsessiz=41943040

Base Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Base Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP
481.wrf: -DNOUNDERSCORE +noppu

Base Optimization Flags

C benchmarks:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

C++ benchmarks:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Fortran benchmarks:

+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Benchmarks using both Fortran and C:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp_rate2006 = 54.8

SPECfp_rate_base2006 = 53.4

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Peak Compiler Invocation (Continued)

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Peak Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP

481.wrf: -DNOUNDERSCORE +noppu

Peak Optimization Flags

C benchmarks:

433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

470.lbm: basepeak = yes

482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.66GHz/18MB Dual-Core Intel Itanium)

SPECfp_rate2006 = 54.8

SPECfp_rate_base2006 = 53.4

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2007

Hardware Availability: Nov-2007

Software Availability: Sep-2007

Peak Optimization Flags (Continued)

416.gamess: +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.07.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 14:19:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 November 2007.