



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp®_rate2006 = 79.2

SPECfp_rate_base2006 = 70.4

CPU2006 license: 22


Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

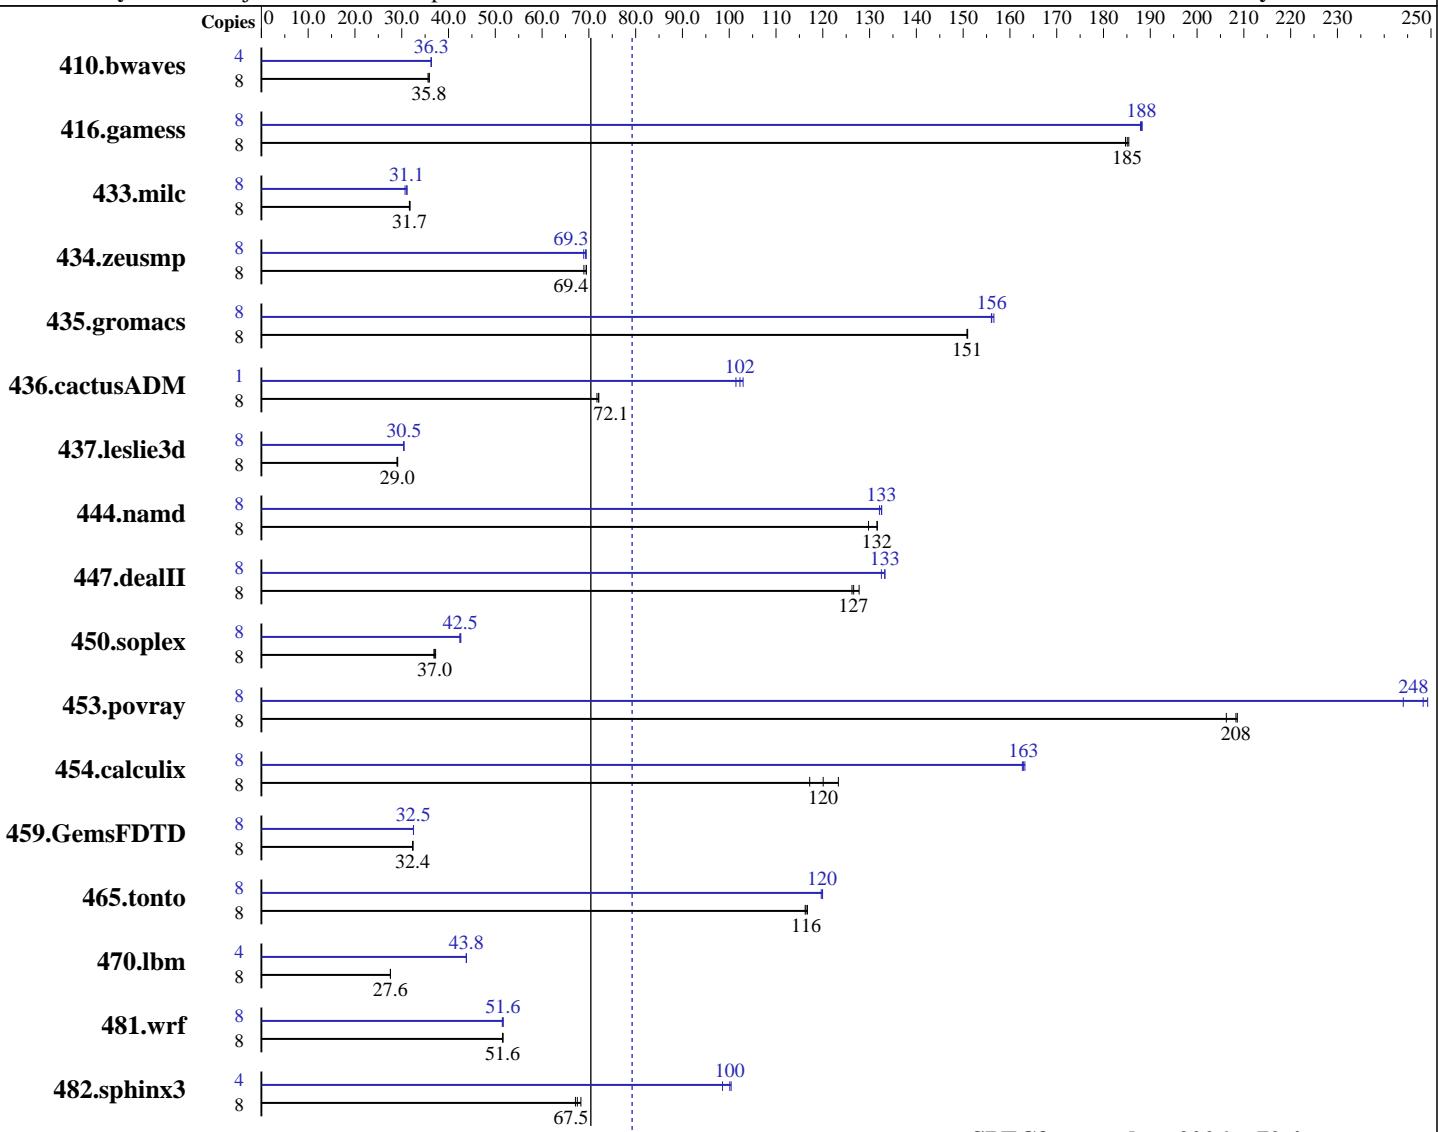

SPECfp_rate_base2006 = 70.4

SPECfp_rate2006 = 79.2

Hardware

CPU Name: Intel Xeon X5460
CPU Characteristics:
CPU MHz:
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64)
Compiler: kernel 2.6.16.21-0.8-smp
Auto Parallel: Intel C++ and Fortran Compiler
File System: for Linux32 and Linux64
System State: Version 10.1 - Build 20070725
Base Pointers: Yes
ext3
Multi-User, Run Level 3
64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp_rate2006 = 79.2

CPU2006 license: 22

Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: SATA II 7200 rpm
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3053	35.6	<u>3033</u>	<u>35.8</u>	3029	35.9	4	1498	36.3	<u>1497</u>	<u>36.3</u>	1496	36.3
416.gamess	8	848	185	845	185	<u>846</u>	<u>185</u>	8	832	188	<u>833</u>	<u>188</u>	834	188
433.milc	8	2322	31.6	2311	31.8	<u>2318</u>	<u>31.7</u>	8	<u>2365</u>	<u>31.1</u>	2391	30.7	2358	31.1
434.zeusmp	8	1056	68.9	1048	69.5	<u>1048</u>	<u>69.4</u>	8	1048	69.4	<u>1050</u>	<u>69.3</u>	1057	68.9
435.gromacs	8	379	151	<u>379</u>	<u>151</u>	378	151	8	366	156	365	157	<u>366</u>	<u>156</u>
436.cactusADM	8	1333	71.7	<u>1326</u>	<u>72.1</u>	1326	72.1	1	118	101	116	103	<u>117</u>	<u>102</u>
437.leslie3d	8	2592	29.0	<u>2589</u>	<u>29.0</u>	2580	29.1	8	<u>2470</u>	<u>30.5</u>	2468	30.5	2473	30.4
444.namd	8	487	132	494	130	<u>488</u>	<u>132</u>	8	486	132	<u>484</u>	<u>133</u>	484	133
447.dealII	8	725	126	716	128	<u>723</u>	<u>127</u>	8	687	133	<u>687</u>	<u>133</u>	691	133
450.soplex	8	1791	37.2	<u>1801</u>	<u>37.0</u>	1809	36.9	8	1572	42.4	<u>1570</u>	<u>42.5</u>	1565	42.6
453.povray	8	204	209	206	206	<u>204</u>	<u>208</u>	8	171	249	<u>171</u>	<u>248</u>	174	244
454.calculix	8	535	123	563	117	<u>550</u>	<u>120</u>	8	406	163	<u>405</u>	<u>163</u>	404	163
459.GemsFDTD	8	<u>2623</u>	<u>32.4</u>	2624	32.3	2620	32.4	8	<u>2611</u>	<u>32.5</u>	2612	32.5	2610	32.5
465.tonto	8	674	117	677	116	<u>676</u>	<u>116</u>	8	<u>657</u>	<u>120</u>	658	120	656	120
470.lbm	8	3985	27.6	3984	27.6	<u>3985</u>	<u>27.6</u>	4	1254	43.8	1255	43.8	<u>1254</u>	<u>43.8</u>
481.wrf	8	1731	51.6	1733	51.6	<u>1732</u>	<u>51.6</u>	8	1729	51.7	1735	51.5	<u>1731</u>	<u>51.6</u>
482.sphinx3	8	2283	68.3	2323	67.1	<u>2309</u>	<u>67.5</u>	4	791	98.6	<u>779</u>	<u>100</u>	776	100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:

Enhanced Speedstep Technology = Disable

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

SnooFilter = Enable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp_rate2006 = 79.2

SPECfp_rate_base2006 = 70.4

CPU2006 license: 22

Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:

437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp_rate2006 = 79.2

SPECfp_rate_base2006 = 70.4

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort  
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp_rate2006 = 79.2

SPECfp_rate_base2006 = 70.4

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
          -auto-ilp32  
  
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
          -scalar-rep -prefetch -opt-malloc-options=3  
  
482.sphinx3: -fast -unroll12
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
          -auto-ilp32  
  
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
           -ansi-alias -scalar-rep-  
  
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
           -opt-malloc-options=3  
  
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
           -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -fast -prefetch  
  
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
           -ansi-alias -scalar-rep-  
  
434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast  
  
437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
           -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5460 processor

SPECfp_rate2006 = 79.2

SPECfp_rate_base2006 = 70.4

CPU2006 license: 22

Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -Obo
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:22:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.