



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 32.5

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECfp_rate_base2006 = 31.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

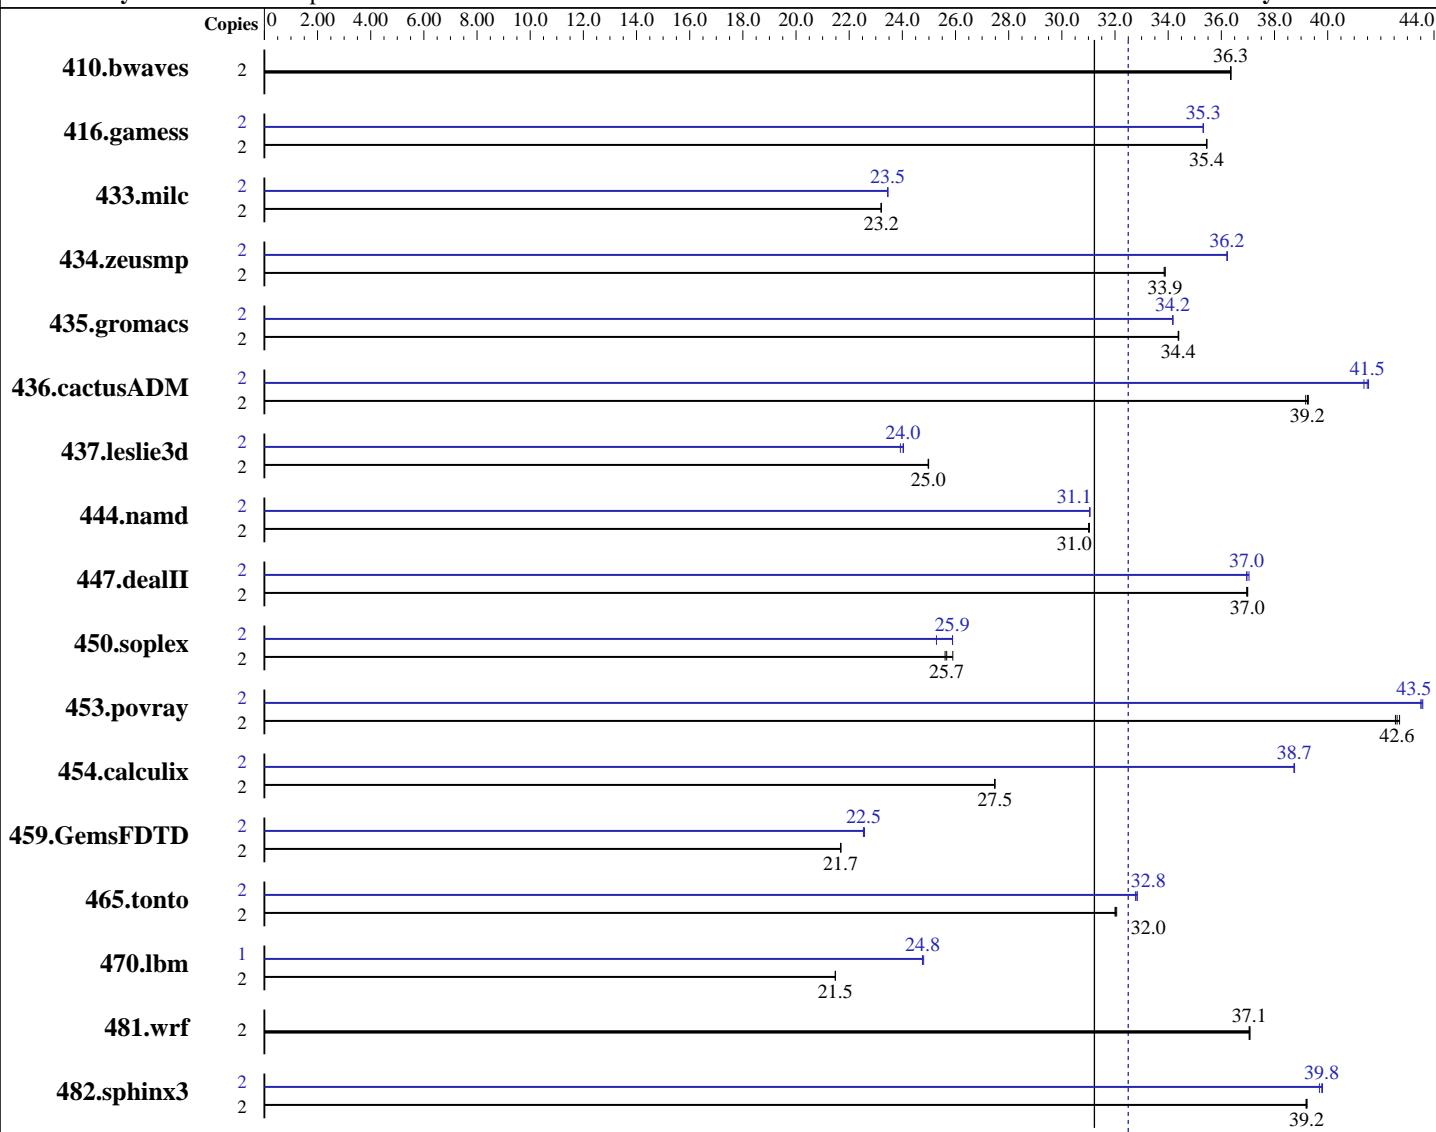

SPECfp_rate_base2006 = 31.2

SPECfp_rate2006 = 32.5

Hardware

CPU Name: Intel Core 2 Duo E6850
CPU Characteristics: 3.00 GHz 1333 MHz FSB
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip

Software

Operating System: Windows Vista64 Ultimate
Compiler: Intel C++ Compiler for IA32 version 10.1 Build 20070913 Package ID: w_cc_p_10.1.011
Intel Fortran Compiler for IA32 version 10.1 Build 20070913 Package ID: w_fc_p_10.1.011
Microsoft Visual Studio 2005 SP1 (for libraries)
Auto Parallel: No
File System: NTFS
System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 32.5

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECfp_rate_base2006 = 31.2

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

L3 Cache:	None	Base Pointers:	32-bit
Other Cache:	None	Peak Pointers:	32-bit
Memory:	2 GB (2x1GB Corsair TWIN3X2048-1333C9DHX DDR3-1333 CL9)	Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/
Disk Subsystem:	Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	747	36.4	748	36.3	748	36.3	2	747	36.4	748	36.3	748	36.3		
416.gamess	2	1105	35.4	1105	35.4	1104	35.5	2	1109	35.3	1109	35.3	1108	35.3		
433.milc	2	791	23.2	791	23.2	791	23.2	2	783	23.4	783	23.5	783	23.5		
434.zeusmp	2	537	33.9	538	33.8	537	33.9	2	502	36.2	503	36.2	503	36.2		
435.gromacs	2	415	34.4	415	34.4	415	34.4	2	418	34.2	418	34.2	418	34.2		
436.cactusADM	2	610	39.2	609	39.3	609	39.2	2	576	41.5	578	41.4	575	41.5		
437.leslie3d	2	753	25.0	752	25.0	753	25.0	2	782	24.0	782	24.0	786	23.9		
444.namd	2	517	31.0	517	31.0	517	31.0	2	517	31.1	517	31.0	517	31.1		
447.dealII	2	618	37.0	619	37.0	619	37.0	2	619	37.0	619	37.0	618	37.0		
450.soplex	2	644	25.9	651	25.6	650	25.7	2	644	25.9	660	25.3	644	25.9		
453.povray	2	250	42.6	250	42.5	249	42.7	2	244	43.5	245	43.5	244	43.6		
454.calculix	2	600	27.5	601	27.5	600	27.5	2	426	38.7	426	38.7	426	38.8		
459.GemsFDTD	2	978	21.7	979	21.7	979	21.7	2	940	22.6	942	22.5	941	22.5		
465.tonto	2	614	32.1	615	32.0	615	32.0	2	600	32.8	601	32.8	599	32.8		
470.lbm	2	1279	21.5	1280	21.5	1279	21.5	1	555	24.8	554	24.8	555	24.8		
481.wrf	2	602	37.1	603	37.1	603	37.1	2	602	37.1	603	37.1	603	37.1		
482.sphinx3	2	994	39.2	995	39.2	994	39.2	2	980	39.8	982	39.7	979	39.8		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 11/2007:

<http://www.asus.com/products.aspx?l1=3&l2=11&l3=572&l4=0&model=1872&modelmenu=1>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista32

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

The start command with the /affinity switch was used to bind processes to cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 32.5

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECfp_rate_base2006 = 31.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

`icl -Qvc8 -Qc99`

C++ benchmarks:

`icl -Qvc8`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icl -Qvc8 -Qc99 ifort`

Base Portability Flags

436.cactusADM: `-Qlowercase /assume:underscore`

`444.namd: -TP`

`447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG`

`453.povray: -DSPEC_CPU_WINDOWS_ICL`

`454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase`

`481.wrf: -DSPEC_CPU_WINDOWS_ICL`

Base Optimization Flags

C benchmarks:

`-fast /F1000000000`

C++ benchmarks:

`-fast -Qcxx_features /F1000000000 shlw32m.lib`
 `-link /FORCE:MULTIPLE`

Fortran benchmarks:

`-fast /F1000000000`

Benchmarks using both Fortran and C:

`-fast /F1000000000`

Peak Compiler Invocation

C benchmarks:

`icl -Qvc8 -Qc99`

C++ benchmarks:

`icl -Qvc8`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 32.5

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECfp_rate_base2006 = 31.2

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -fast -Qunroll12 -Oa /F1000000000

470.lbm: -fast -Qunroll12 -Qscalar-rep- -Qprefetch /F1000000000

482.sphinx3: -fast -Qunroll12 /F1000000000

C++ benchmarks:

444.namd: -fast -Oa -Qcxx_features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: -fast -Qunroll12 -Qprefetch -Qcxx_features /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

450.soplex: -fast -Qcxx_features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: -fast -Qunroll14 -Qansi-alias -Qcxx_features /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -fast -Qunroll12 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 32.5

Asus P5E3 Deluxe (Intel Core 2 Duo E6850)

SPECfp_rate_base2006 = 31.2

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll10 -Qscalar-rep- /F1000000000

437.leslie3d: -fast -Qprefetch /F1000000000

459.GemsFDTD: -fast -Qunroll12 -Ob0 -Qprefetch /F1000000000

465.tonto: -fast -Qunroll14 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -fast -Oa -Qprefetch /F1000000000

436.cactusADM: -fast -Qunroll12 -Qprefetch /F1000000000

454.calculix: -fast -Qunroll-aggressive /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:33:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.