



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 32.0

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate_base2006 = 29.6

CPU2006 license: 55


Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

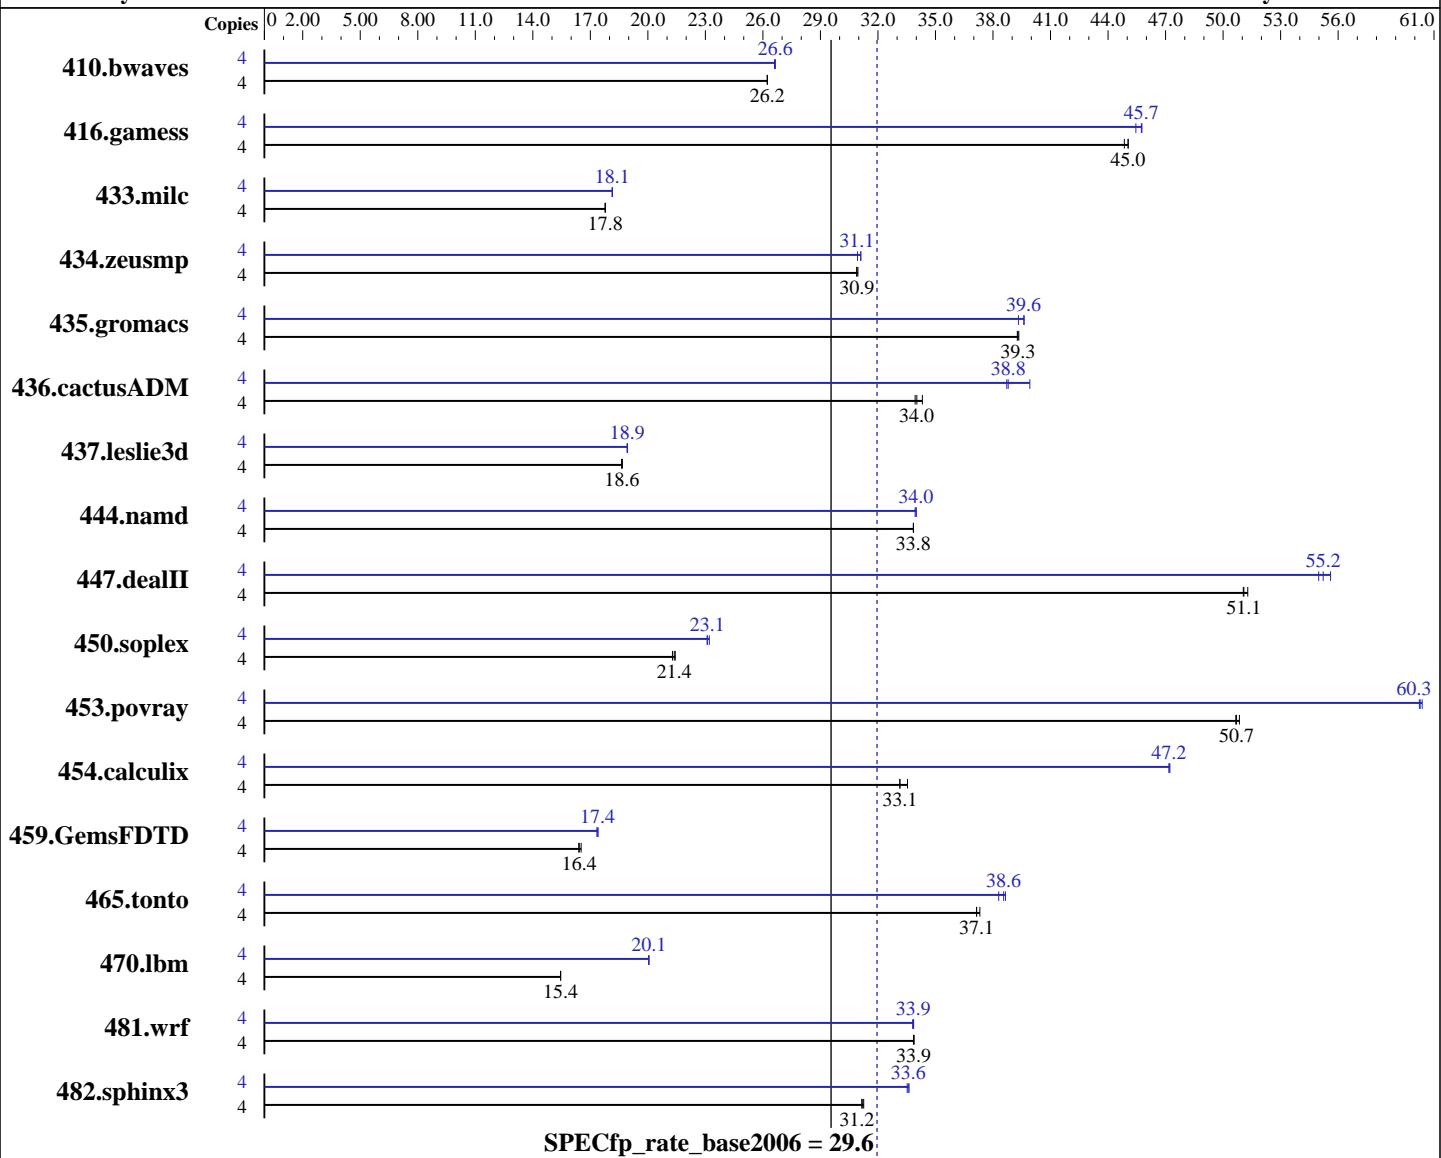

Hardware

CPU Name: Intel Xeon 5110
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 1666
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
 Auto Parallel: No
 File System: ReiserFS
 System State: Default
 Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 32.0

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate_base2006 = 29.6

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2072	26.2	2073	26.2	<u>2072</u>	<u>26.2</u>	4	2040	26.6	2043	26.6	<u>2040</u>	<u>26.6</u>
416.gamess	4	<u>1739</u>	<u>45.0</u>	1746	44.9	1738	45.1	4	1711	45.8	<u>1712</u>	<u>45.7</u>	1723	45.5
433.milc	4	2066	17.8	2064	17.8	<u>2065</u>	<u>17.8</u>	4	<u>2023</u>	<u>18.1</u>	2023	18.2	2025	18.1
434.zeusmp	4	1176	31.0	<u>1178</u>	<u>30.9</u>	1178	30.9	4	1170	31.1	<u>1170</u>	<u>31.1</u>	1177	30.9
435.gromacs	4	<u>727</u>	<u>39.3</u>	726	39.3	727	39.3	4	<u>721</u>	<u>39.6</u>	721	39.6	726	39.3
436.cactusADM	4	<u>1405</u>	<u>34.0</u>	1393	34.3	1408	33.9	4	<u>1232</u>	<u>38.8</u>	1197	39.9	1235	38.7
437.leslie3d	4	2014	18.7	2018	18.6	<u>2016</u>	<u>18.6</u>	4	1985	18.9	1987	18.9	<u>1987</u>	<u>18.9</u>
444.namd	4	948	33.9	948	33.8	<u>948</u>	<u>33.8</u>	4	<u>944</u>	<u>34.0</u>	945	33.9	944	34.0
447.dealII	4	<u>896</u>	<u>51.1</u>	892	51.3	896	51.1	4	823	55.6	<u>829</u>	<u>55.2</u>	832	55.0
450.soplex	4	<u>1561</u>	<u>21.4</u>	1567	21.3	1557	21.4	4	<u>1438</u>	23.2	1444	23.1	<u>1444</u>	<u>23.1</u>
453.povray	4	<u>420</u>	<u>50.7</u>	418	50.9	420	50.7	4	352	60.4	<u>353</u>	<u>60.3</u>	353	60.2
454.calculix	4	984	33.5	<u>996</u>	<u>33.1</u>	996	33.1	4	699	47.2	699	47.2	<u>699</u>	<u>47.2</u>
459.GemsFDTD	4	2588	16.4	<u>2584</u>	<u>16.4</u>	2569	16.5	4	<u>2441</u>	<u>17.4</u>	2448	17.3	2439	17.4
465.tonto	4	1055	37.3	1060	37.1	<u>1060</u>	<u>37.1</u>	4	1018	38.7	1028	38.3	<u>1021</u>	<u>38.6</u>
470.lbm	4	3558	15.4	<u>3557</u>	<u>15.4</u>	3557	15.4	4	2741	20.1	2741	20.0	<u>2741</u>	<u>20.1</u>
481.wrf	4	<u>1319</u>	<u>33.9</u>	1320	33.9	1319	33.9	4	<u>1320</u>	<u>33.9</u>	1322	33.8	1319	33.9
482.sphinx3	4	<u>2498</u>	<u>31.2</u>	2494	31.3	2503	31.2	4	<u>2319</u>	<u>33.6</u>	2325	33.5	<u>2322</u>	<u>33.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores

KMP_STACK_SIZE set to 64M

KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 '/usr/bin/taskset' used to bind processes to CPUs



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate2006 = 32.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetch = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate2006 = 32.0

SPECfp_rate_base2006 = 29.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate2006 = 32.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 32.0

PowerEdge 1950 (Intel Xeon 5110, 1.60 GHz)

SPECfp_rate_base2006 = 29.6

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:36:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.