



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i110Rh-1
(Intel Xeon processor 3040)

SPECfp[®]_rate2006 = 20.3

SPECfp_rate_base2006 = 19.9

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

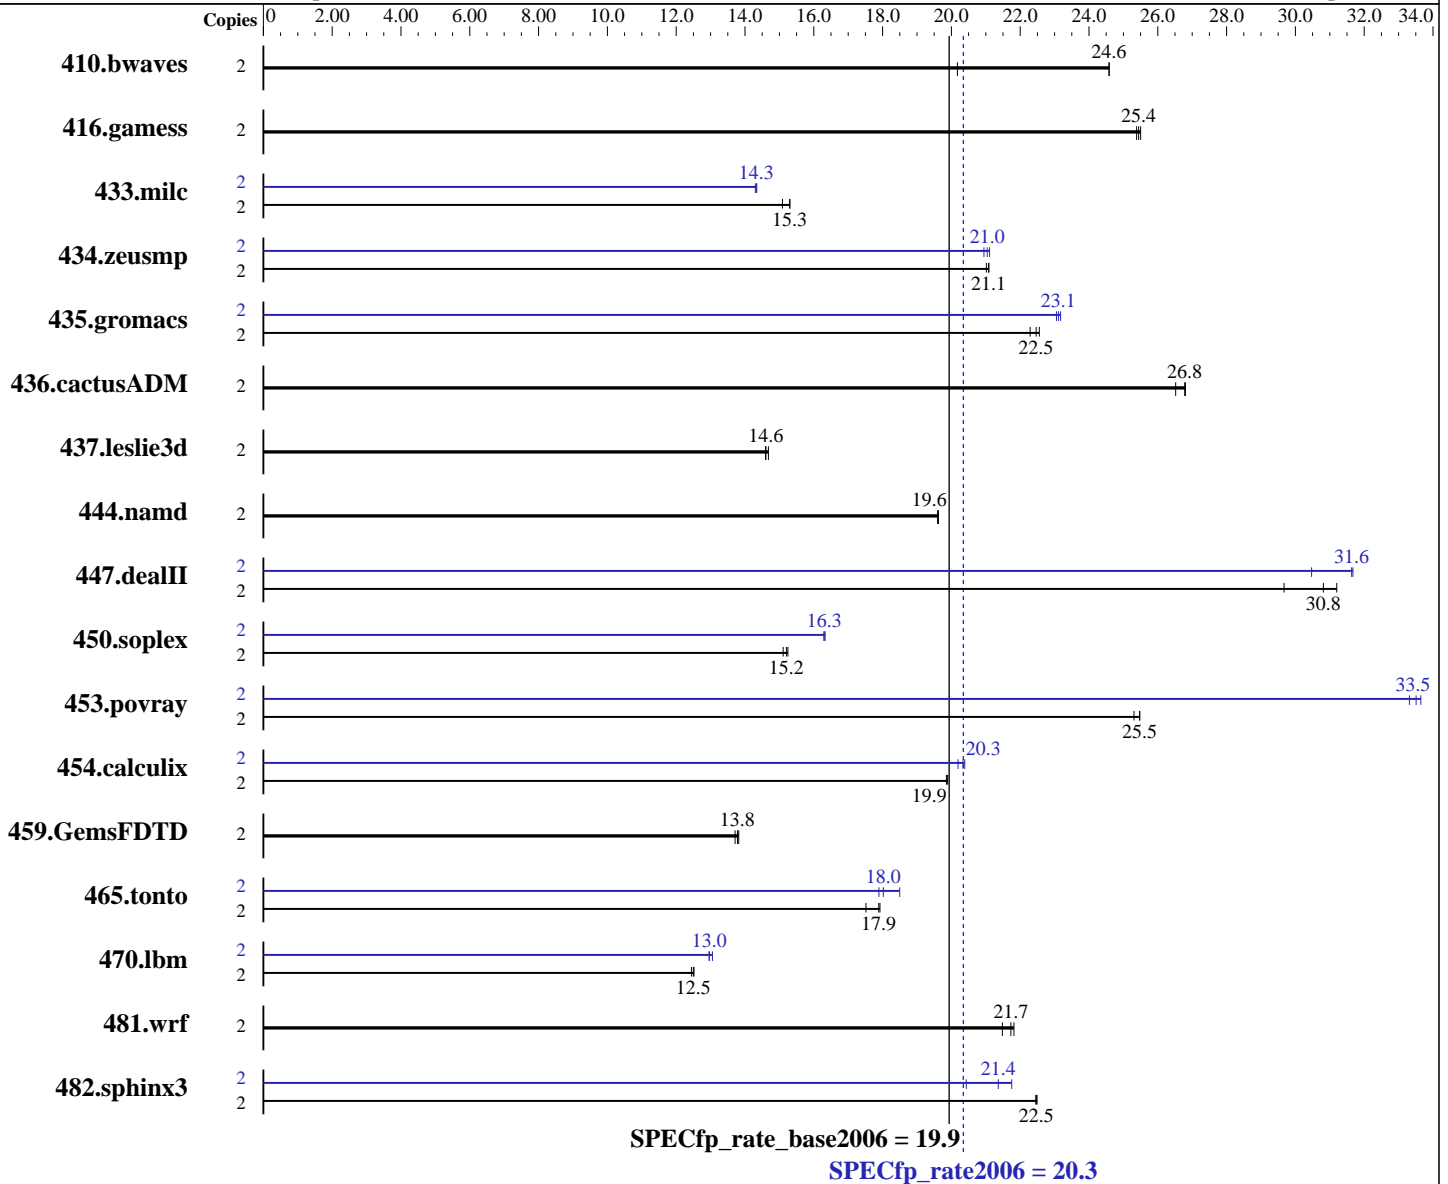

Hardware

CPU Name: Intel Xeon 3040
 CPU Characteristics: 1.86 GHz, 2 MB L2, 1066 MHz bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64),
Kernel 2.6.16.21-0.8-smpp
 Compiler: Intel C++ Compiler for IA32/EM64T application,
Version 9.1 - Build 20070320, Package-ID:
l_cc_c_9.1.049
 Intel Fortran Compiler for IA32/EM64T application,
Version 9.1 - Build 20070320, Package ID:
l_fc_c_9.1.045
 Auto Parallel: No
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i110Rh-1
(Intel Xeon processor 3040)

SPECfp_rate2006 = 20.3

SPECfp_rate_base2006 = 19.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1 GB PC2-5300E, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x80 GB SATAII, 7200RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1347	20.2	1105	24.6	<u>1106</u>	<u>24.6</u>	2	1347	20.2	1105	24.6	<u>1106</u>	<u>24.6</u>
416.gamess	2	1543	25.4	<u>1539</u>	<u>25.4</u>	1536	25.5	2	1543	25.4	<u>1539</u>	<u>25.4</u>	1536	25.5
433.milc	2	1217	15.1	1200	15.3	<u>1200</u>	<u>15.3</u>	2	1280	14.3	1284	14.3	<u>1282</u>	<u>14.3</u>
434.zeusmp	2	866	21.0	<u>863</u>	<u>21.1</u>	863	21.1	2	862	21.1	869	20.9	<u>865</u>	<u>21.0</u>
435.gromacs	2	<u>636</u>	<u>22.5</u>	641	22.3	633	22.6	2	616	23.2	619	23.1	<u>618</u>	<u>23.1</u>
436.cactusADM	2	901	26.5	892	26.8	<u>892</u>	<u>26.8</u>	2	901	26.5	892	26.8	<u>892</u>	<u>26.8</u>
437.leslie3d	2	1281	14.7	1288	14.6	<u>1287</u>	<u>14.6</u>	2	1281	14.7	1288	14.6	<u>1287</u>	<u>14.6</u>
444.namd	2	817	19.6	818	19.6	<u>818</u>	<u>19.6</u>	2	817	19.6	818	19.6	<u>818</u>	<u>19.6</u>
447.dealII	2	<u>743</u>	<u>30.8</u>	771	29.7	733	31.2	2	<u>723</u>	<u>31.6</u>	751	30.5	722	31.7
450.soplex	2	1104	15.1	1094	15.2	<u>1097</u>	<u>15.2</u>	2	<u>1023</u>	<u>16.3</u>	1024	16.3	1021	16.3
453.povray	2	418	25.5	<u>418</u>	<u>25.5</u>	420	25.3	2	<u>318</u>	<u>33.5</u>	319	33.3	316	33.6
454.calculix	2	829	19.9	<u>830</u>	<u>19.9</u>	831	19.9	2	817	20.2	809	20.4	<u>811</u>	<u>20.3</u>
459.GemsFDTD	2	1548	13.7	1536	13.8	<u>1540</u>	<u>13.8</u>	2	1548	13.7	1536	13.8	<u>1540</u>	<u>13.8</u>
465.tonto	2	1123	17.5	<u>1100</u>	<u>17.9</u>	1098	17.9	2	<u>1092</u>	<u>18.0</u>	1100	17.9	1064	18.5
470.lbm	2	2209	12.4	2195	12.5	<u>2199</u>	<u>12.5</u>	2	2121	13.0	<u>2120</u>	<u>13.0</u>	2105	13.1
481.wrf	2	<u>1028</u>	<u>21.7</u>	1024	21.8	1040	21.5	2	<u>1028</u>	<u>21.7</u>	1024	21.8	1040	21.5
482.sphinx3	2	1736	22.5	<u>1735</u>	<u>22.5</u>	1733	22.5	2	<u>1825</u>	<u>21.4</u>	1908	20.4	1792	21.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 1066 MHz
All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i110Rh-1
(Intel Xeon processor 3040)

SPECfp_rate2006 = 20.3

SPECfp_rate_base2006 = 19.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i110Rh-1
(Intel Xeon processor 3040)

SPECfp_rate2006 = 20.3

SPECfp_rate_base2006 = 19.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Compiler Invocation

C benchmarks:

```
/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include  
-L/opt/intel/cc/9.1.049/lib
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/9.1.049/bin/icpc  
-I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib
```

Fortran benchmarks (except as noted below):

ifort

```
434.zeusmp: /opt/intel/fc/9.1.045/bin/ifort  
-I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast
```

```
470.lbm: Same as 433.milc
```

```
482.sphinx3: -fast
```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 20.3

Express5800/i110Rh-1
(Intel Xeon processor 3040)

SPECfp_rate_base2006 = 19.9

CPU2006 license: 9006

Test date: Nov-2007

Test sponsor: NEC Corporation

Hardware Availability: May-2007

Tested by: NEC Corporation

Software Availability: Apr-2007

Peak Optimization Flags (Continued)

444.namd: basepeak = yes

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:45:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2007.