



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 97.7

Acer Altos R920 (Intel Xeon E7340)

SPECint_rate_base2006 = 87.1

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

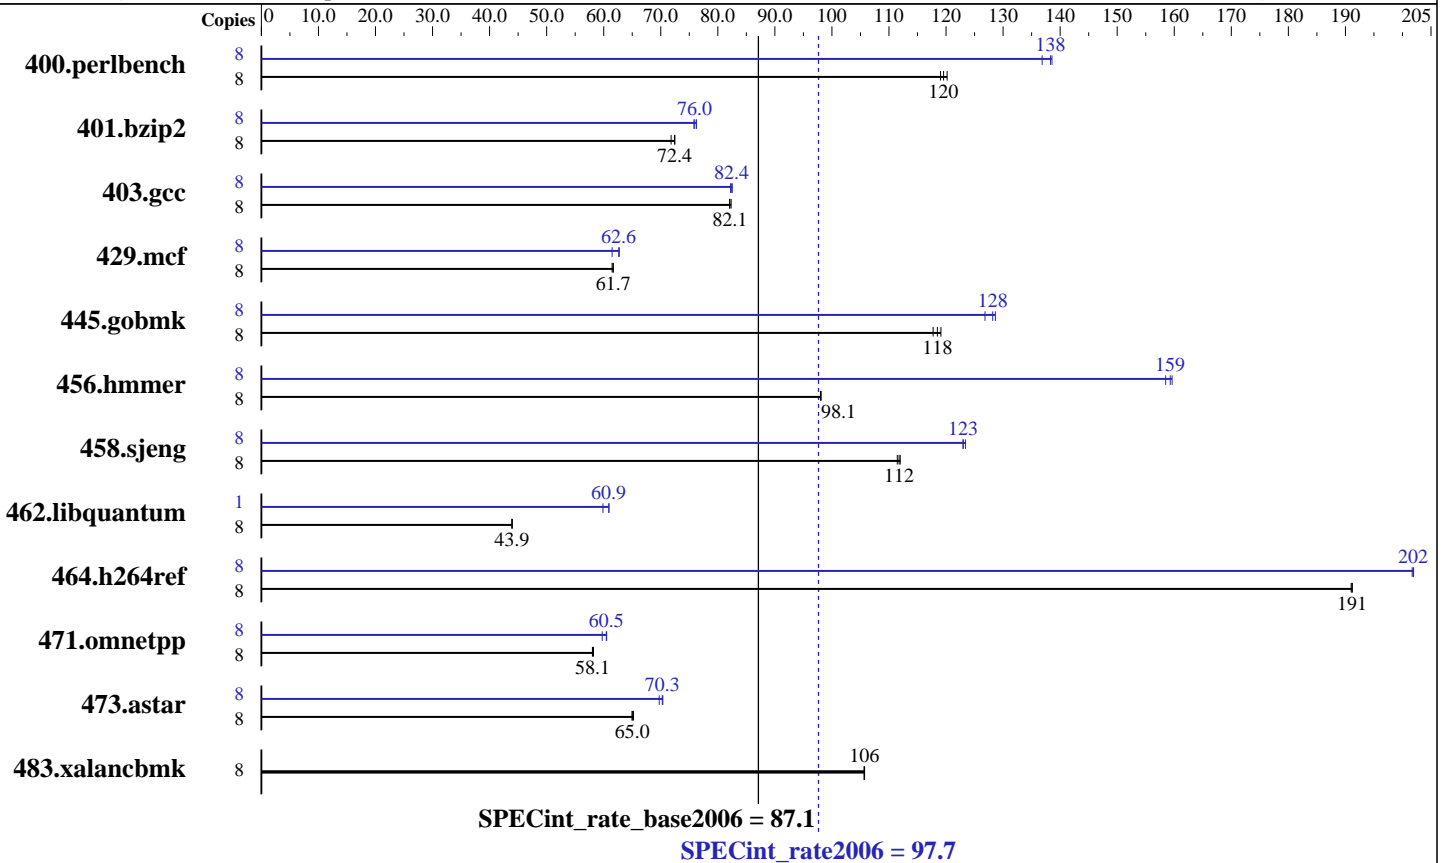

Hardware

CPU Name: Intel Xeon E7340
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2, 4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (16 x 1048MB ECC FB-DIMM DDR2-667 CL5-5-5)
 Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 (x86_64)
 Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64
 version 10.1
 Build 20070725
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 97.7

Acer Altos R920 (Intel Xeon E7340)

SPECint_rate_base2006 = 87.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	657	119	654	120	650	120	8	564	139	571	137	565	138
401.bzip2	8	1065	72.5	1075	71.8	1066	72.4	8	1018	75.8	1016	76.0	1012	76.3
403.gcc	8	782	82.3	784	82.1	785	82.1	8	781	82.4	780	82.5	783	82.2
429.mcf	8	1183	61.7	1183	61.7	1187	61.5	8	1187	61.5	1163	62.7	1165	62.6
445.gobmk	8	705	119	708	118	713	118	8	652	129	662	127	655	128
456.hammer	8	762	98.0	761	98.1	761	98.1	8	471	158	469	159	468	160
458.sjeng	8	866	112	865	112	869	111	8	787	123	784	123	787	123
462.libquantum	8	3771	44.0	3774	43.9	3773	43.9	1	346	59.9	340	60.9	340	60.9
464.h264ref	8	926	191	927	191	926	191	8	877	202	877	202	878	202
471.omnetpp	8	859	58.2	861	58.1	862	58.0	8	837	59.7	827	60.5	826	60.5
473.astar	8	864	65.0	861	65.2	864	65.0	8	805	69.7	799	70.3	798	70.4
483.xalancbmk	8	523	106	522	106	522	106	8	523	106	522	106	522	106

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

BIOS Settings

Hardware Prefetcher set to OFF

Adjacent Cache Line Prefetch set to OFF

All results but peak 462.libquantum used taskset to bind processes to cores.

"ulimit -s unlimited" was set for stacksize unlimited

OMP_NUM_THREADS set to number of cores

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 97.7

Acer Altos R920 (Intel Xeon E7340)

SPECint_rate_base2006 = 87.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:

`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

`401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

`456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

C++ benchmarks:

`icpc`

Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 97.7

Acer Altos R920 (Intel Xeon E7340)

SPECint_rate_base2006 = 87.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.00.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 97.7

Acer Altos R920 (Intel Xeon E7340)

SPECint_rate_base2006 = 87.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:11:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 April 2008.