



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 76.9

Servidor Itaotec MX201 (Intel Xeon X5460)

SPECint_rate_base2006 = 64.4

CPU2006 license: 9001


Test date: Mar-2008

Test sponsor: Itaotec

Hardware Availability: Dec-2007

Tested by: Itaotec

Software Availability: Jan-2008

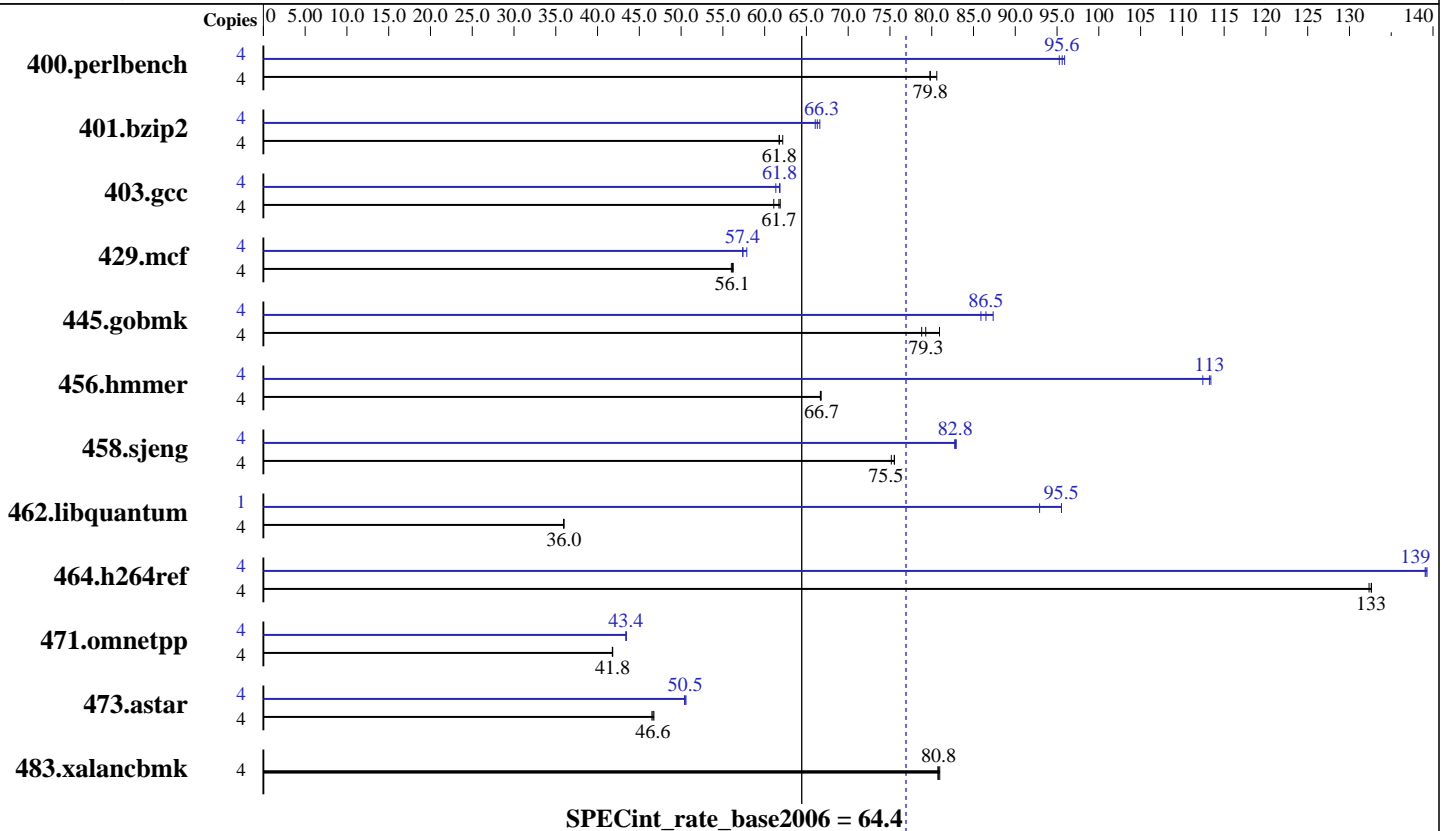

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics:
 CPU MHz: 3160
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
 Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.10.50
 MicroQuill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 76.9

Servidor Itaotec MX201 (Intel Xeon X5460)

SPECint_rate_base2006 = 64.4

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	485	80.6	490	79.8	490	79.8	4	409	95.6	410	95.3	407	95.9
401.bzip2	4	621	62.2	625	61.8	625	61.7	4	580	66.6	582	66.3	584	66.1
403.gcc	4	522	61.7	527	61.1	520	61.9	4	525	61.3	521	61.8	521	61.8
429.mcf	4	651	56.0	649	56.2	650	56.1	4	630	57.9	636	57.4	636	57.4
445.gobmk	4	533	78.8	518	80.9	529	79.3	4	489	85.9	485	86.5	480	87.4
456.hammer	4	559	66.7	560	66.7	559	66.7	4	332	112	330	113	329	113
458.sjeng	4	644	75.2	641	75.5	641	75.5	4	584	82.8	585	82.7	584	82.9
462.libquantum	4	2305	36.0	2307	35.9	2303	36.0	1	217	95.5	217	95.5	223	92.9
464.h264ref	4	667	133	668	133	669	132	4	636	139	636	139	637	139
471.omnetpp	4	598	41.8	599	41.8	598	41.8	4	576	43.4	576	43.4	576	43.4
473.astar	4	602	46.6	601	46.7	604	46.5	4	555	50.6	556	50.5	557	50.4
483.xalancbmk	4	341	80.8	341	81.0	342	80.7	4	341	80.8	341	81.0	342	80.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.

Platform Notes

BIOS configuration:
Hardware Prefetch Disabled

General Notes

This result was measured on the Servidor Itaotec MX201.
The Servidor Itaotec MX221 and the Servidor Itaotec MX201 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 76.9

Servidor Itautec MX201 (Intel Xeon X5460)

SPECint_rate_base2006 = 64.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3
C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include
456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include
C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 76.9

Servidor Itaotec MX201 (Intel Xeon X5460)

SPECint_rate_base2006 = 64.4

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 76.9

Servidor Itautec MX201 (Intel Xeon X5460)

SPECint_rate_base2006 = 64.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:42:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 April 2008.