



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp[®]_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Mar-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

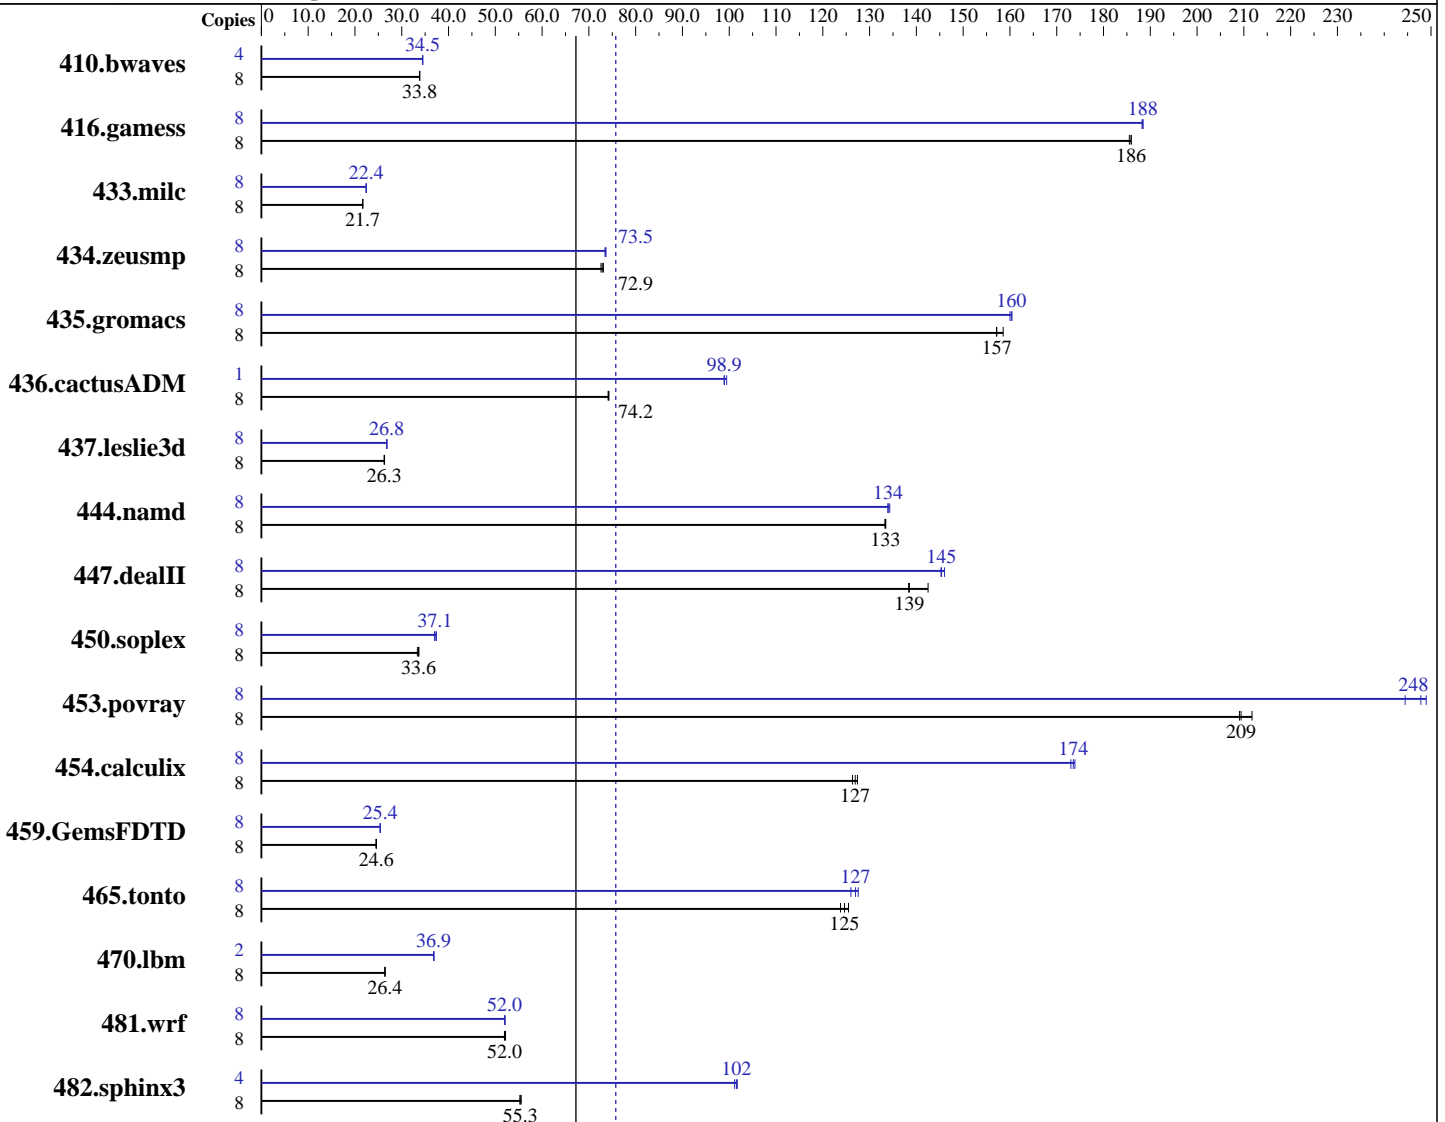

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 3.16 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 3167
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smpp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	<u>3214</u>	<u>33.8</u>	3212	33.8	3215	33.8	4	1577	34.5	<u>1577</u>	<u>34.5</u>	1576	34.5		
416.gamess	8	844	186	<u>843</u>	<u>186</u>	843	186	8	831	188	832	188	<u>831</u>	<u>188</u>		
433.milc	8	3398	21.6	<u>3388</u>	<u>21.7</u>	3387	21.7	8	<u>3277</u>	<u>22.4</u>	3277	22.4	3277	22.4		
434.zeusmp	8	1003	72.6	<u>999</u>	<u>72.9</u>	996	73.1	8	991	73.5	<u>990</u>	<u>73.5</u>	988	73.7		
435.gromacs	8	360	159	<u>363</u>	<u>157</u>	364	157	8	356	160	357	160	<u>356</u>	<u>160</u>		
436.cactusADM	8	1290	74.1	<u>1288</u>	<u>74.2</u>	1287	74.3	1	120	99.4	121	98.9	<u>121</u>	<u>98.9</u>		
437.leslie3d	8	<u>2863</u>	<u>26.3</u>	2857	26.3	2863	26.3	8	2806	26.8	<u>2805</u>	<u>26.8</u>	2804	26.8		
444.namd	8	481	133	481	133	<u>481</u>	<u>133</u>	8	479	134	<u>479</u>	<u>134</u>	478	134		
447.dealII	8	<u>661</u>	<u>139</u>	642	142	662	138	8	627	146	630	145	<u>630</u>	<u>145</u>		
450.soplex	8	2001	33.3	1983	33.6	<u>1984</u>	<u>33.6</u>	8	1804	37.0	<u>1797</u>	<u>37.1</u>	1783	37.4		
453.povray	8	201	212	<u>203</u>	<u>209</u>	204	209	8	<u>172</u>	<u>248</u>	174	244	171	249		
454.calculix	8	522	126	518	127	<u>520</u>	<u>127</u>	8	381	173	<u>380</u>	<u>174</u>	380	174		
459.GemsFDTD	8	3468	24.5	<u>3450</u>	<u>24.6</u>	3450	24.6	8	<u>3341</u>	<u>25.4</u>	3342	25.4	3340	25.4		
465.tonto	8	627	125	636	124	<u>632</u>	<u>125</u>	8	<u>620</u>	<u>127</u>	625	126	617	128		
470.lbm	8	4163	26.4	<u>4160</u>	<u>26.4</u>	4157	26.4	2	<u>746</u>	<u>36.9</u>	746	36.8	745	36.9		
481.wrf	8	1720	52.0	1712	52.2	<u>1718</u>	<u>52.0</u>	8	1716	52.1	1719	52.0	<u>1717</u>	<u>52.0</u>		
482.sphinx3	8	2807	55.5	2821	55.3	<u>2818</u>	<u>55.3</u>	4	<u>768</u>	<u>102</u>	766	102	771	101		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/120Lj(Intel Xeon X5460) and the Bull NovaScale T860 E1(Intel Xeon X5460,3.16GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon X5460) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-
434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast
437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3
459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch
465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECfp_rate2006 = 75.7

SPECfp_rate_base2006 = 67.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:15:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2008.