



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 184

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate_base2006 = 160

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

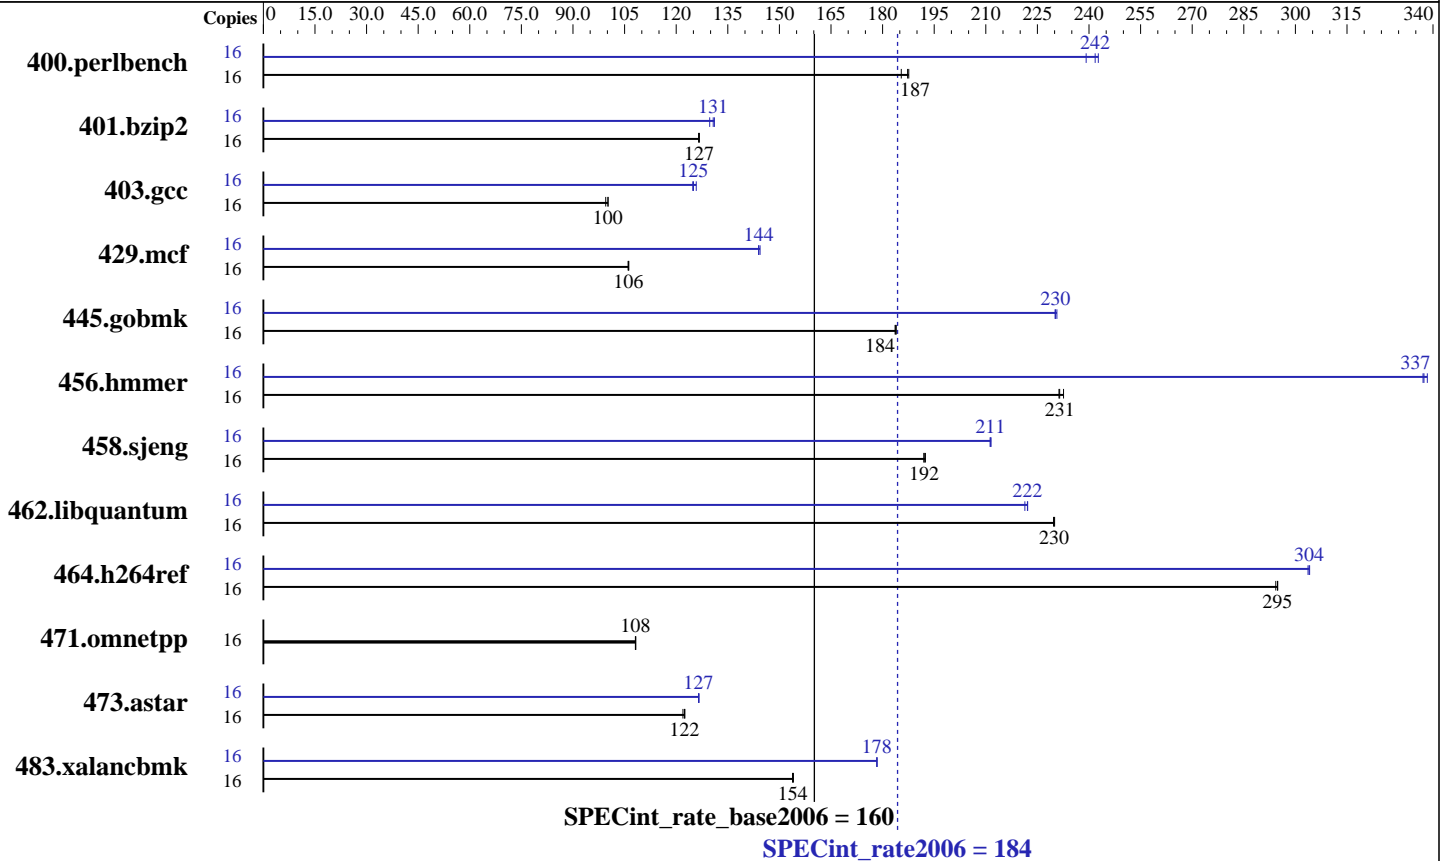

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB, PC2-5300P CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils-2.18.50, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 184

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate_base2006 = 160

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<u>835</u>	<u>187</u>	833	188	843	185	16	654	239	644	243	<u>646</u>	<u>242</u>
401.bzip2	16	<u>1219</u>	<u>127</u>	1219	127	1220	127	16	1190	130	1178	131	<u>1181</u>	<u>131</u>
403.gcc	16	1286	100	1294	99.5	<u>1286</u>	<u>100</u>	16	1024	126	<u>1030</u>	<u>125</u>	1032	125
429.mcf	16	1376	106	<u>1374</u>	<u>106</u>	1374	106	16	1011	144	<u>1013</u>	<u>144</u>	1013	144
445.gobmk	16	914	184	<u>913</u>	<u>184</u>	912	184	16	728	231	<u>729</u>	<u>230</u>	729	230
456.hammer	16	645	231	642	233	<u>645</u>	<u>231</u>	16	<u>442</u>	<u>337</u>	441	338	443	337
458.sjeng	16	1008	192	1006	192	<u>1008</u>	<u>192</u>	16	916	211	915	212	<u>916</u>	<u>211</u>
462.libquantum	16	1443	230	1441	230	<u>1442</u>	<u>230</u>	16	1492	222	<u>1493</u>	<u>222</u>	1498	221
464.h264ref	16	1203	294	1201	295	<u>1201</u>	<u>295</u>	16	1166	304	<u>1165</u>	<u>304</u>	1164	304
471.omnetpp	16	925	108	<u>924</u>	<u>108</u>	924	108	16	925	108	<u>924</u>	<u>108</u>	924	108
473.astar	16	<u>918</u>	<u>122</u>	921	122	917	123	16	887	127	<u>888</u>	<u>127</u>	888	127
483.xalancbmk	16	<u>717</u>	<u>154</u>	718	154	717	154	16	<u>619</u>	<u>178</u>	619	178	619	178

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
 Max locked memory set to 2097152
 PGI_HUGE_PAGES set to 896.
 Total number of huge pages available is 14336.
 NCPUS set to number of cores
 numactl used to bind processes to CPUs

Platform Notes

BIOS configuration:
 Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 184

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate_base2006 = 160

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

```

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 184

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate_base2006 = 160

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Compiler Invocation (Continued)

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast
 -OPT:malloc_alg=1

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
 -Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
 -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
 -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
 -fastsse -Msmartalloc=huge:150 -Mfprelaxed
 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 184

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate_base2006 = 160

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_rate2006 = 184

SPECint_rate_base2006 = 160

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:51:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 April 2008.