



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c  
(2.00 GHz, Intel Xeon E5405)

**SPECfp®2006 = 18.1**

**SPECfp\_base2006 = 15.4**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

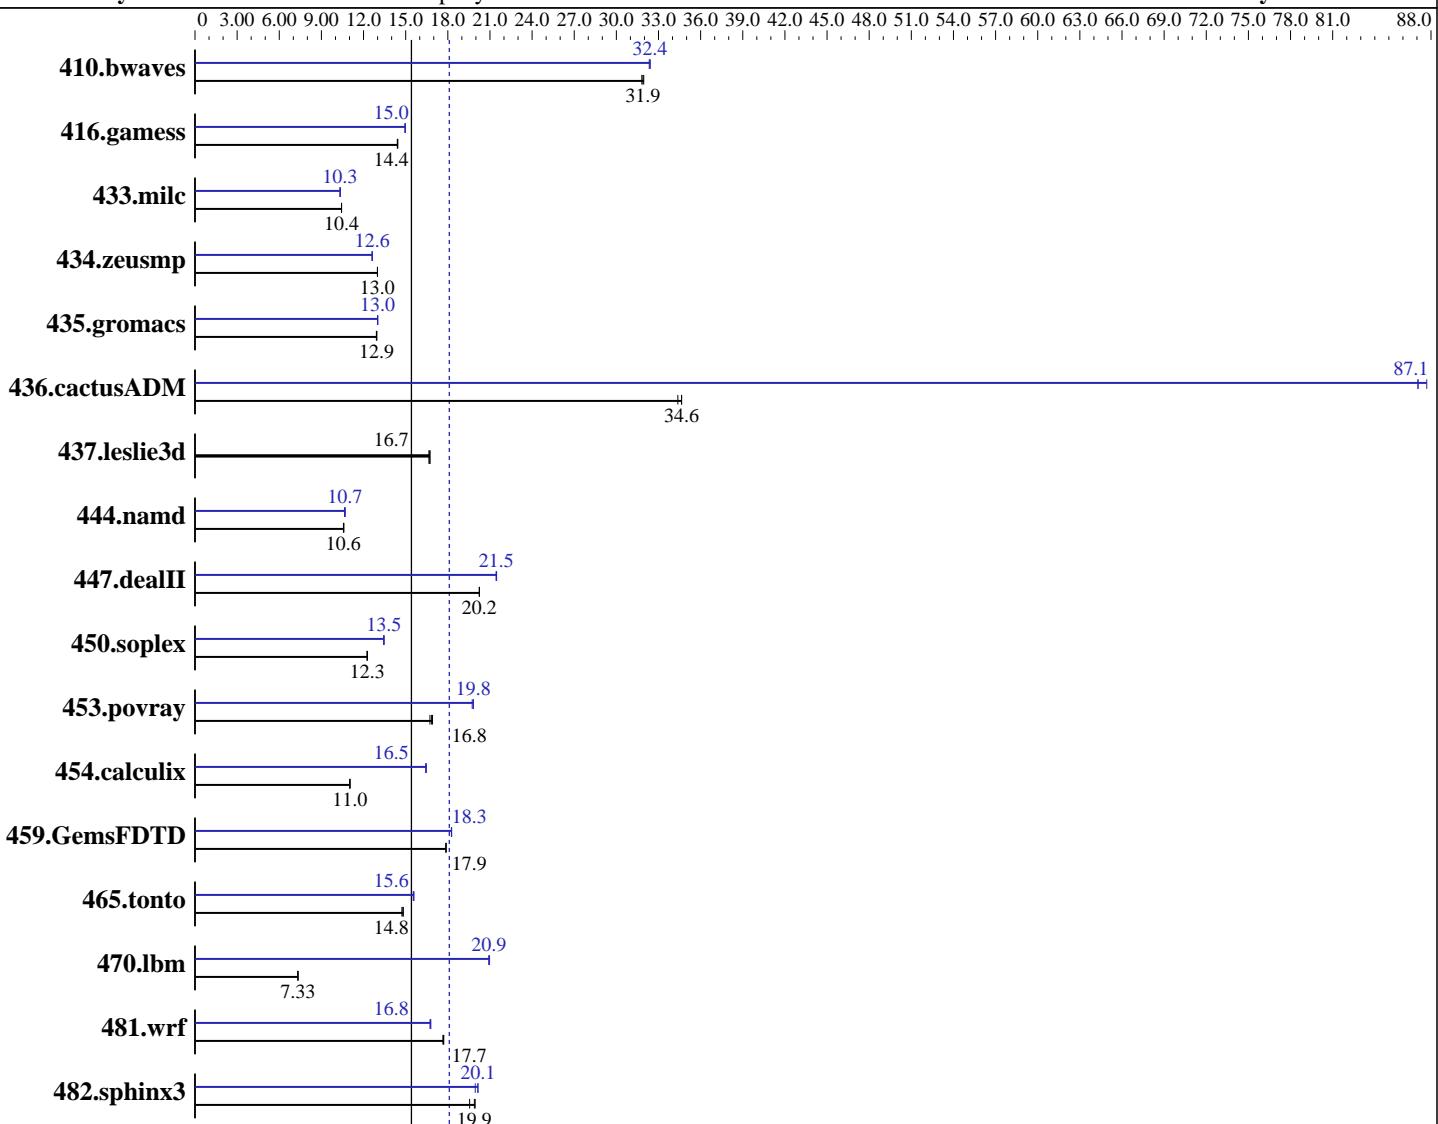

### Hardware

CPU Name: Intel Xeon E5405  
CPU Characteristics: 2.00 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Intel Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c  
(2.00 GHz, Intel Xeon E5405)

**SPECfp2006 =** 18.1

**SPECfp\_base2006 =** 15.4

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Mar-2008

**Hardware Availability:** Nov-2007

**Software Availability:** Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x72 GB 15 K SAS  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	427	31.8	<b>426</b>	<b>31.9</b>	425	31.9	<b>420</b>	<b>32.4</b>	419	32.4	420	32.3
416.gamess	1359	14.4	1356	14.4	<b>1357</b>	<b>14.4</b>	<b>1308</b>	<b>15.0</b>	1308	15.0	1310	14.9
433.milc	880	10.4	<b>880</b>	<b>10.4</b>	880	10.4	889	10.3	888	10.3	<b>889</b>	<b>10.3</b>
434.zeusmp	<b>700</b>	<b>13.0</b>	700	13.0	701	13.0	<b>721</b>	<b>12.6</b>	722	12.6	721	12.6
435.gromacs	553	12.9	<b>552</b>	<b>12.9</b>	552	12.9	<b>549</b>	<b>13.0</b>	549	13.0	549	13.0
436.cactusADM	<b>345</b>	<b>34.6</b>	345	34.6	348	34.4	<b>137</b>	<b>87.1</b>	136	87.7	137	87.1
437.leslie3d	562	16.7	<b>562</b>	<b>16.7</b>	564	16.7	<b>562</b>	<b>16.7</b>	<b>562</b>	<b>16.7</b>	564	16.7
444.namd	<b>759</b>	<b>10.6</b>	756	10.6	759	10.6	<b>751</b>	<b>10.7</b>	754	10.6	750	10.7
447.dealII	565	20.2	<b>565</b>	<b>20.2</b>	565	20.3	<b>533</b>	<b>21.5</b>	533	21.5	534	21.4
450.soplex	680	12.3	680	12.3	<b>680</b>	<b>12.3</b>	620	13.5	<b>620</b>	<b>13.5</b>	621	13.4
453.povray	318	16.7	<b>316</b>	<b>16.8</b>	315	16.9	270	19.7	<b>269</b>	<b>19.8</b>	268	19.8
454.calculix	748	11.0	<b>748</b>	<b>11.0</b>	749	11.0	501	16.5	502	16.4	<b>501</b>	<b>16.5</b>
459.GemsFDTD	<b>594</b>	<b>17.9</b>	594	17.9	594	17.9	<b>581</b>	18.3	581	18.3	<b>581</b>	<b>18.3</b>
465.tonto	663	14.8	<b>665</b>	<b>14.8</b>	668	14.7	<b>632</b>	<b>15.6</b>	631	15.6	633	15.5
470.lbm	1873	7.34	<b>1875</b>	<b>7.33</b>	1877	7.32	<b>655</b>	21.0	<b>657</b>	20.9	<b>656</b>	<b>20.9</b>
481.wrf	<b>631</b>	<b>17.7</b>	633	17.6	631	17.7	<b>667</b>	16.7	<b>667</b>	<b>16.8</b>	665	16.8
482.sphinx3	997	19.6	977	19.9	<b>980</b>	<b>19.9</b>	<b>977</b>	20.0	<b>968</b>	<b>20.1</b>	967	20.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c  
(2.00 GHz, Intel Xeon E5405)

**SPECfp2006 =**

**18.1**

**SPECfp\_base2006 =**

**15.4**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast -parallel

C++ benchmarks:  
-fast -parallel

Fortran benchmarks:  
-fast -parallel

Benchmarks using both Fortran and C:  
-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company ProLiant BL460c (2.00 GHz, Intel Xeon E5405)	<b>SPECfp2006 =</b> 18.1
	<b>SPECfp_base2006 =</b> 15.4
<b>CPU2006 license:</b> 3	<b>Test date:</b> Mar-2008
<b>Test sponsor:</b> Hewlett-Packard Company	<b>Hardware Availability:</b> Nov-2007
<b>Tested by:</b> Hewlett-Packard Company	<b>Software Availability:</b> Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
    -auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
    -scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c  
(2.00 GHz, Intel Xeon E5405)

**SPECfp2006 =**

**18.1**

**SPECfp\_base2006 =**

**15.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:**

Mar-2008

**Hardware Availability:** Nov-2007

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c  
(2.00 GHz, Intel Xeon E5405)

**SPECfp2006 =** 18.1

**SPECfp\_base2006 =** 15.4

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:58:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 April 2008.