



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20


Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

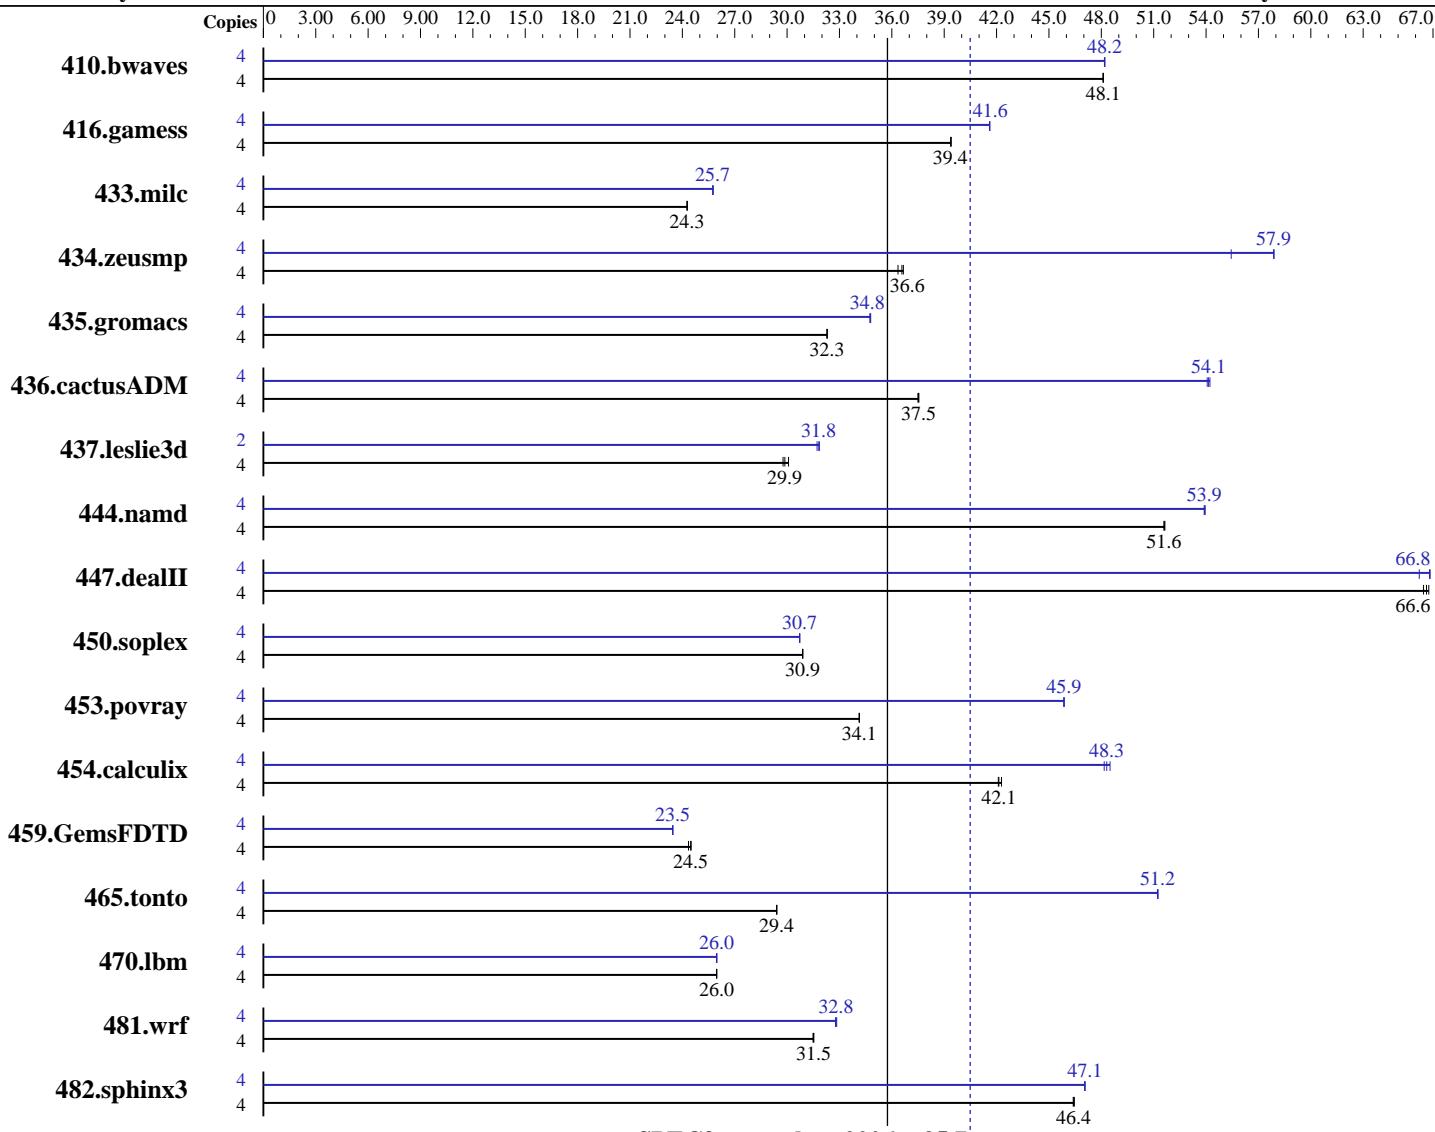

SPECfp_rate_base2006 = 35.7

SPECfp_rate2006 = 40.5

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz:
 FPU:
 CPU(s) enabled:
 CPU(s) orderable:
 Primary Cache:
 Secondary Cache:

POWER6

4200

Integrated

2 cores, 1 chip, 2 cores/chip, 2 threads/core

2 cores

64 KB I + 64 KB D on chip per core

4 MB I+D on chip per core

Software

Operating System: IBM AIX V6.1 Updated to SP3
 Compiler: XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
 Auto Parallel: XL Fortran Enterprise Edition V11.1 for AIX Updated with the Oct2007 PTF.
 File System: No
 System State: AIX/JFS2
 Base Pointers: Multi-user
 32-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20

Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB) DDR2 667 MHz
 Disk Subsystem: 2x73 GB SAS 15K RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: --

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1130	48.1	1130	48.1	1130	48.1	4	1128	48.2	1128	48.2	1128	48.2
416.gamess	4	1988	39.4	1989	39.4	1989	39.4	4	1883	41.6	1882	41.6	1883	41.6
433.milc	4	1513	24.3	1513	24.3	1512	24.3	4	1426	25.7	1425	25.8	1426	25.7
434.zeusmp	4	1001	36.4	995	36.6	993	36.7	4	657	55.4	629	57.9	629	57.9
435.gromacs	4	885	32.3	884	32.3	884	32.3	4	822	34.8	821	34.8	822	34.7
436.cactusADM	4	1273	37.5	1275	37.5	1273	37.5	4	883	54.1	882	54.2	884	54.1
437.leslie3d	4	1250	30.1	1263	29.8	1259	29.9	2	590	31.9	593	31.7	591	31.8
444.namd	4	621	51.6	622	51.6	622	51.6	4	595	54.0	595	53.9	595	53.9
447.dealII	4	685	66.8	687	66.6	689	66.5	4	685	66.8	691	66.2	685	66.8
450.soplex	4	1080	30.9	1079	30.9	1080	30.9	4	1086	30.7	1086	30.7	1086	30.7
453.povray	4	623	34.1	624	34.1	623	34.1	4	464	45.9	464	45.9	464	45.9
454.calculix	4	783	42.1	780	42.3	784	42.1	4	685	48.2	683	48.3	680	48.5
459.GemsFDTD	4	1732	24.5	1734	24.5	1743	24.4	4	1810	23.5	1810	23.5	1810	23.5
465.tonto	4	1338	29.4	1339	29.4	1339	29.4	4	768	51.2	768	51.2	768	51.2
470.lbm	4	2117	26.0	2117	26.0	2117	26.0	4	2116	26.0	2116	26.0	2116	26.0
481.wrf	4	1419	31.5	1418	31.5	1417	31.5	4	1360	32.8	1363	32.8	1362	32.8
482.sphinx3	4	1681	46.4	1678	46.5	1679	46.4	4	1657	47.0	1656	47.1	1656	47.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

See flags file of details on following settings.
 all ulimits set to unlimited.

Environment variables set before executing benchmarks:

```
MALLOCOPTIONS=pool
MEMORY_AFFINITY=MCM
XLF RTEOPTS=intrinthds=1
```

System set to "Enhanced" mode when defining partition on HMC.
 bindprocessor command used on submit to bind each copy to a unique processor.

500 16M large pages defined with vmo command

Remote console disabled in /etc/inittab.

fdpr binary optimization tool used for:

```
410.bwaves 433.milc 435.gromacs 436.cactusADM
453.povray 470.lbm 482.sphinx3
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20

Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```

Fortran benchmarks:

```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:

```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

```
410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-D__IBM_FAST_VECTOR -blpdata
```

Fortran benchmarks:

```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap  
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20

Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20

Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -qfdpr -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx
-qvecnvol -D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS

447.dealII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -qenablevmx -qvecnvol -qstrict -D_ILS_MACROS
-blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnvol -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qalias=nostd

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol
-qxlf90=nosignedzero -blpdata

437.leslie3d: -O4 -qlargepage -q64 -blpdata

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnvol -q64 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnvol -qfdpr -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol
-qfdpr -qnostrict -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 40.5

Bull Escala PL260 (4.2 GHz, 2 cores)

SPECfp_rate_base2006 = 35.7

CPU2006 license: 20

Test date: Feb-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -blpdata

481.wrf: -bmaxdata:0x30000000 -O5 -qlargepage -qalias=nostd
-D_ILS_MACROS -blpdata

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 18:33:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 April 2008.