



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 74.4**

Acer Altos G330 Mk2 (Intel Xeon X3360)

**SPECint\_rate\_base2006 = 62.7**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

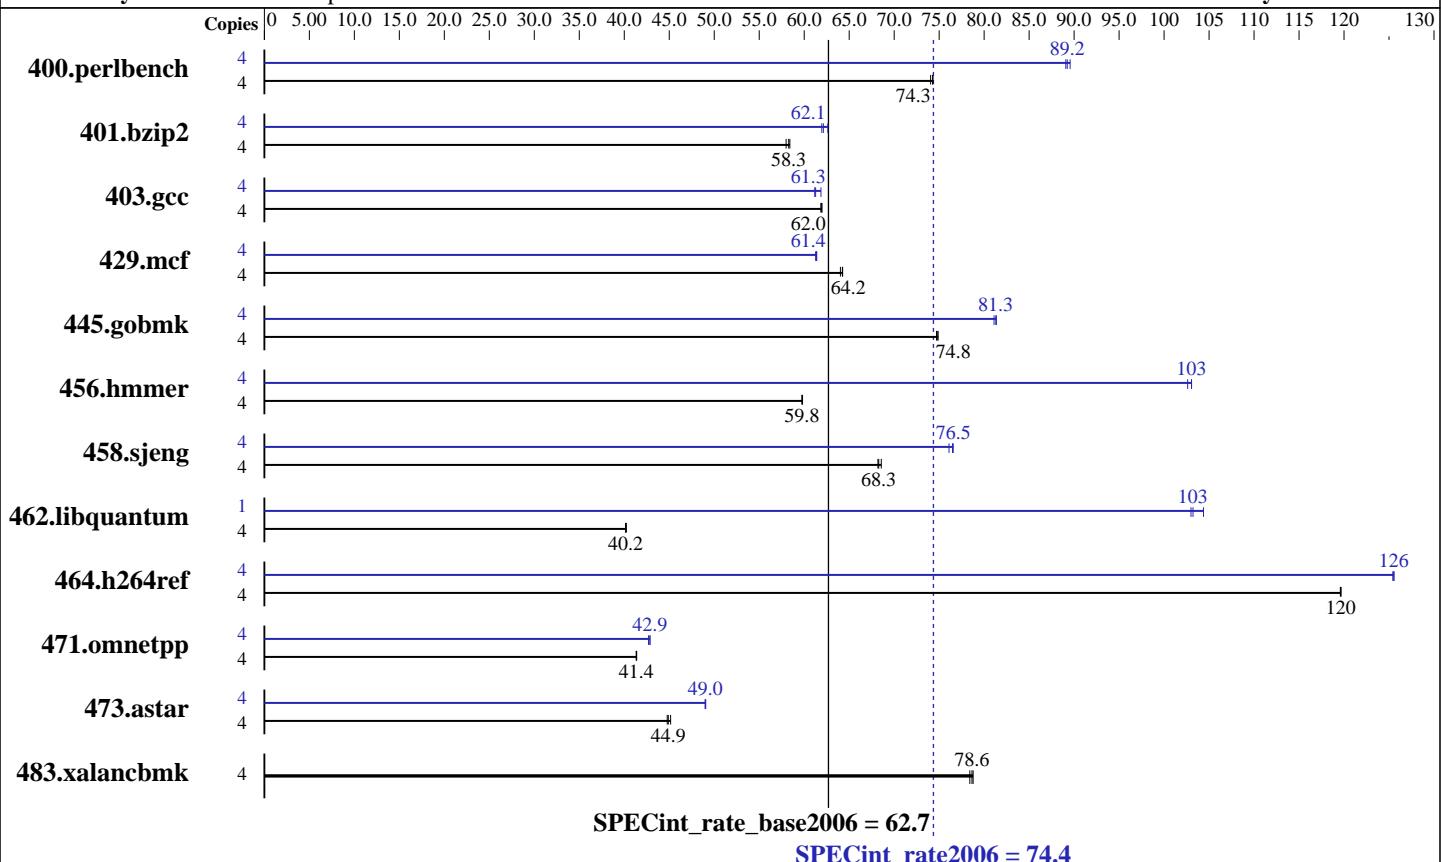

## Hardware

CPU Name: Intel Xeon X3360  
CPU Characteristics: 1333 MHz system bus  
CPU MHz: 2830  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4 x 2048 MB ECC Unbuffered DDR2-800 CL5)  
Disk Subsystem: 1 x 160 GB 7200RPM SATA HDD  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 SP1 (x86\_64)  
Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, level 3  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 74.4**

Acer Altos G330 Mk2 (Intel Xeon X3360)

**SPECint\_rate\_base2006 = 62.7**

CPU2006 license: 97

Test date: Mar-2008

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2008

Tested by: Acer Incorporated

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>526</b>	<b>74.3</b>	528	74.1	526	74.3	4	439	89.1	<b>438</b>	<b>89.2</b>	436	89.6
401.bzip2	4	<b>662</b>	<b>58.3</b>	666	58.0	661	58.4	4	616	62.6	623	62.0	<b>621</b>	<b>62.1</b>
403.gcc	4	520	62.0	<b>520</b>	<b>62.0</b>	521	61.8	4	<b>526</b>	<b>61.3</b>	526	61.2	520	61.9
429.mcf	4	<b>568</b>	<b>64.2</b>	570	64.0	568	64.3	4	595	61.3	594	61.4	<b>594</b>	<b>61.4</b>
445.gobmk	4	562	74.7	560	74.9	<b>561</b>	<b>74.8</b>	4	<b>516</b>	<b>81.3</b>	516	81.4	517	81.1
456.hammer	4	624	59.8	625	59.8	<b>624</b>	<b>59.8</b>	4	362	103	<b>362</b>	<b>103</b>	364	103
458.sjeng	4	<b>709</b>	<b>68.3</b>	710	68.2	706	68.6	4	632	76.6	<b>633</b>	<b>76.5</b>	636	76.1
462.libquantum	4	<b>2064</b>	<b>40.2</b>	2060	40.2	2064	40.1	1	201	103	<b>201</b>	<b>103</b>	199	104
464.h264ref	4	<b>740</b>	<b>120</b>	740	120	740	120	4	706	125	705	126	<b>705</b>	<b>126</b>
471.omnetpp	4	604	41.4	<b>605</b>	<b>41.4</b>	605	41.3	4	586	42.7	583	42.9	<b>583</b>	<b>42.9</b>
473.astar	4	<b>625</b>	<b>44.9</b>	622	45.2	627	44.8	4	573	49.0	<b>573</b>	<b>49.0</b>	572	49.1
483.xalancbmk	4	350	78.8	<b>351</b>	<b>78.6</b>	352	78.4	4	350	78.8	<b>351</b>	<b>78.6</b>	352	78.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode

All results but peak 462.libquantum used taskset to bind processes to cores.

"ulimit -s unlimited" was set for stacksize unlimited  
OMP\_NUM\_THREADS set to number of cores

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 74.4**

Acer Altos G330 Mk2 (Intel Xeon X3360)

**SPECint\_rate\_base2006 = 62.7**

CPU2006 license: 97

Test date: Mar-2008

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2008

Tested by: Acer Incorporated

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

```
456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:

```
icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 74.4**

Acer Altos G330 Mk2 (Intel Xeon X3360)

**SPECint\_rate\_base2006 = 62.7**

CPU2006 license: 97

Test date: Mar-2008

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2008

Tested by: Acer Incorporated

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 74.4**

Acer Altos G330 Mk2 (Intel Xeon X3360)

**SPECint\_rate\_base2006 = 62.7**

**CPU2006 license:** 97

**Test date:** Mar-2008

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Mar-2008

**Tested by:** Acer Incorporated

**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:47:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 April 2008.