



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Blade 6000**

**SPECint_rate2006 = 838
SPECint_rate_base2006 = 752**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Feb-2008

Software Availability: Feb-2008

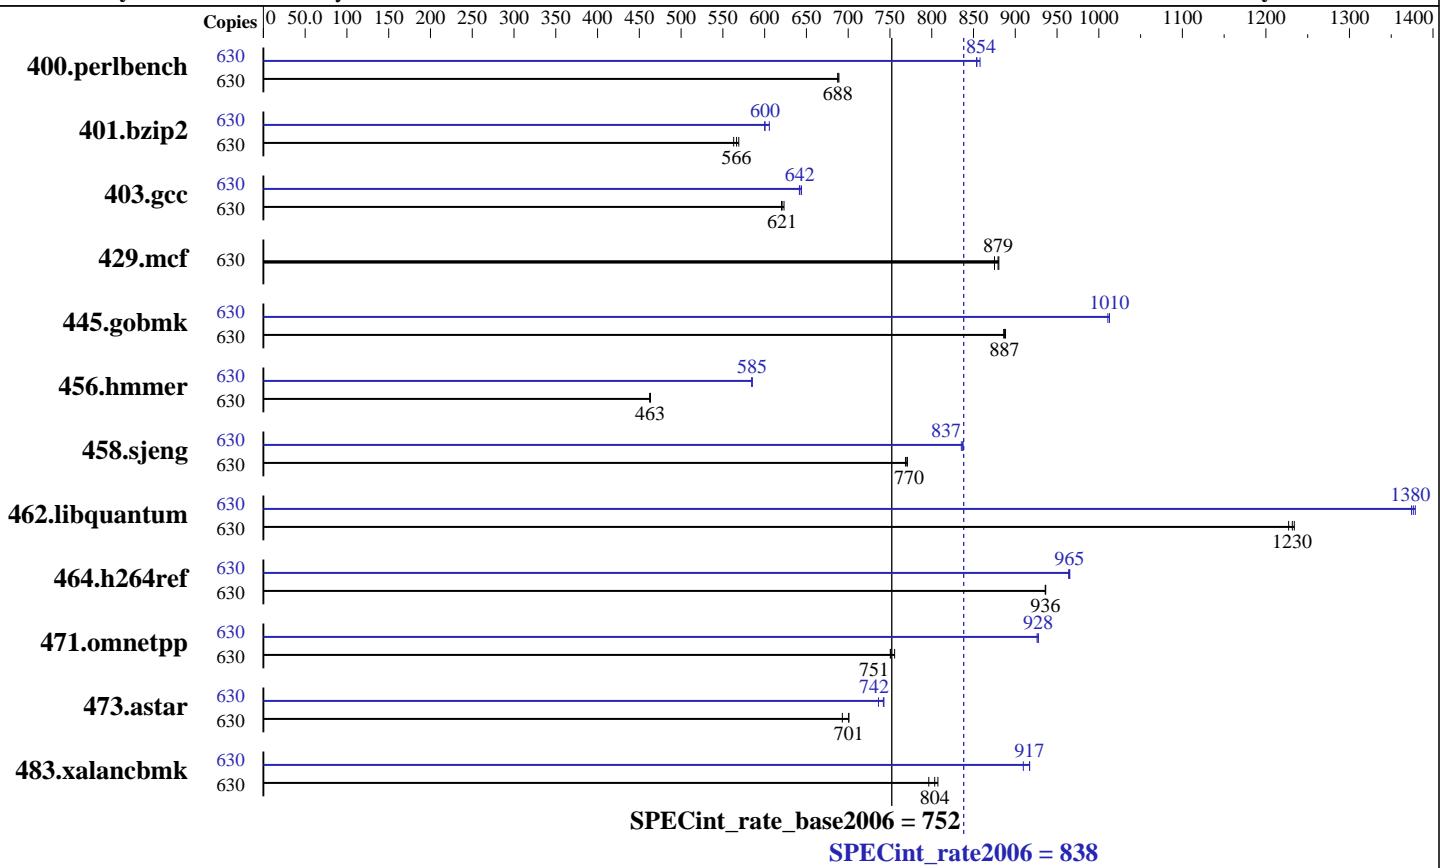

Hardware

CPU Name: UltraSPARC T2
CPU Characteristics:
CPU MHz: 1417
FPU: Integrated
CPU(s) enabled: 80 cores, 10 chips, 8 cores/chip, 8 threads/core
CPU(s) orderable: 1 to 10 Sun Blade T6320 Modules
Primary Cache: 16 KB I + 8 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 640 GB (10 x 16 x 4 GB)
Disk Subsystem: 975 GB RAID 5 via NFS
Other Hardware: 1 GbE network adapter on each blade.

Software

Operating System: Solaris 10 8/07 + patches (see notes)
Compiler: Sun Studio 12 (see patch information below)
gcfss V4.2.0 (see additional detail below)
Auto Parallel: No
File System: NFSv3
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Blade 6000**

**SPECint_rate2006 = 838
SPECint_rate_base2006 = 752**

CPU2006 license: 6

Test date: Mar-2008

Test sponsor: Sun Microsystems

Hardware Availability: Feb-2008

Tested by: Sun Microsystems

Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	630	8950	688	8934	689	8953	688	630	7211	854	7175	858	7207	854
401.bzip2	630	10734	566	10800	563	10684	569	630	10133	600	10039	606	10124	600
403.gcc	630	8138	623	8168	621	8177	620	630	7897	642	7905	642	7873	644
429.mcf	630	6534	879	6527	880	6565	875	630	6534	879	6527	880	6565	875
445.gobmk	630	7458	886	7439	888	7449	887	630	6538	1010	6526	1010	6526	1010
456.hmmer	630	12697	463	12687	463	12713	462	630	10044	585	10056	585	10050	585
458.sjeng	630	9889	771	9897	770	9919	769	630	9125	835	9103	837	9106	837
462.libquantum	630	10637	1230	10579	1230	10599	1230	630	9483	1380	9467	1380	9498	1370
464.h264ref	630	14888	936	14894	936	14897	936	630	14444	965	14450	965	14465	964
471.omnetpp	630	5247	750	5211	756	5244	751	630	4245	928	4245	928	4252	926
473.astar	630	6382	693	6312	701	6312	701	630	5960	742	6007	736	5954	743
483.xalancbmk	630	5384	807	5410	804	5458	796	630	4740	917	4779	910	4740	917

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
The tested configuration included patch 124867-02, 124861-04, 124863-01

Peak also uses "GCC for SPARC Systems", which combines gcc with the Sun Code Generator for SPARC systems. It is invoked as "gcc", and accepts source code compatible with GCC 4.2. For more information, including support, see
<http://cooltools.sunsource.net/gcc/>

Operating System Notes

The Sun Blade 6000 was tested with 10x T6320 Modules, each containing 1x UltraSPARC T2 chip.

The Sun Blade T6320 is supported by Solaris 10 8/07 plus a factory-installed set of patches. As tested, the system used a 15 January 2008 pre-release build of the patch set.

OS and test harness settings include:

- On each T6320 Module:
 - The "webconsole" service was turned off using svcadm disable webconsole

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 6000

SPECint_rate2006 = 838
SPECint_rate_base2006 = 752

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Feb-2008

Software Availability: Feb-2008

Operating System Notes (Continued)

- /etc/system settings:
autoup = 600
set bufhwm_pct=1
set segmap_percent=2
set tsb_rss_factor=128
tune_t_fsflushr = 10
 - Process settings:
ulimit -s 131072
- The "submit" feature was used with a perl procedure, which did arithmetic to derive processor numbers from the SPEC copy number

Additional details about the above points be found in the "Platform Settings" section of the associated flags file.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto -xalias_level=std
-M /usr/lib/ld/map.bssalign

C++ benchmarks:

-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign

Base Other Flags

C benchmarks:

-xjobs=63 -V -#

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 6000

SPECint_rate2006 = 838
SPECint_rate_base2006 = 752

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Feb-2008

Software Availability: Feb-2008

Base Other Flags (Continued)

C++ benchmarks:

-xjobs=63 -verbose=diags,version

Peak Compiler Invocation

C benchmarks (except as noted below):

CC

403.gcc: gcc

456.hmmer: gcc

462.libquantum: gcc

C++ benchmarks (except as noted below):

CC

471.omnetpp: g++

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

462.libquantum: -DSPEC_CPU_SOLARIS -DSPEC_CPU_NEED_COMPLEX_I

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-prefetch=no%auto -xalias_level=std -xipo=2 -Xc
-restrict -lfast

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-prefetch=no%auto -xipo=2 -xalias_level=std

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Blade 6000**

**SPECint_rate2006 = 838
SPECint_rate_base2006 = 752**

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Feb-2008

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -xalias_level=std -xrestrict

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -xipo=2

462.libquantum: -fast -xipo=2

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -xipo=2 -xalias_level=std

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std

473.astar: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize_heap=4M
-xpagesize_stack=64K -xprefetch=no%auto -xdepend
-xalias_level=compatible -xipo=2 -xarch=v8plusb -lfast
-lbsdmalloc

483.xalancbmk: -g0 -library=stlport4 -fast -xpagesize=4M
-xprefetch=no%auto -xdepend -xalias_level=compatible
-xipo=2 -lfast

Peak Other Flags

C benchmarks (except as noted below):

-xjobs=63 -V -#

403.gcc: -v

456.hmmer: -v

462.libquantum: -v

C++ benchmarks (except as noted below):

-xjobs=63 -verbose=diags,version

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 6000

SPECint_rate2006 = 838
SPECint_rate_base2006 = 752

CPU2006 license: 6

Test date: Mar-2008

Test sponsor: Sun Microsystems

Hardware Availability: Feb-2008

Tested by: Sun Microsystems

Software Availability: Feb-2008

Peak Other Flags (Continued)

471.omnetpp: -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2-multinode.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2-multinode.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:54:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.