SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX201 (Intel Xeon E5410)

SPECint®_rate2006 = 92.8

SPECint_rate_base2006 = 85.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

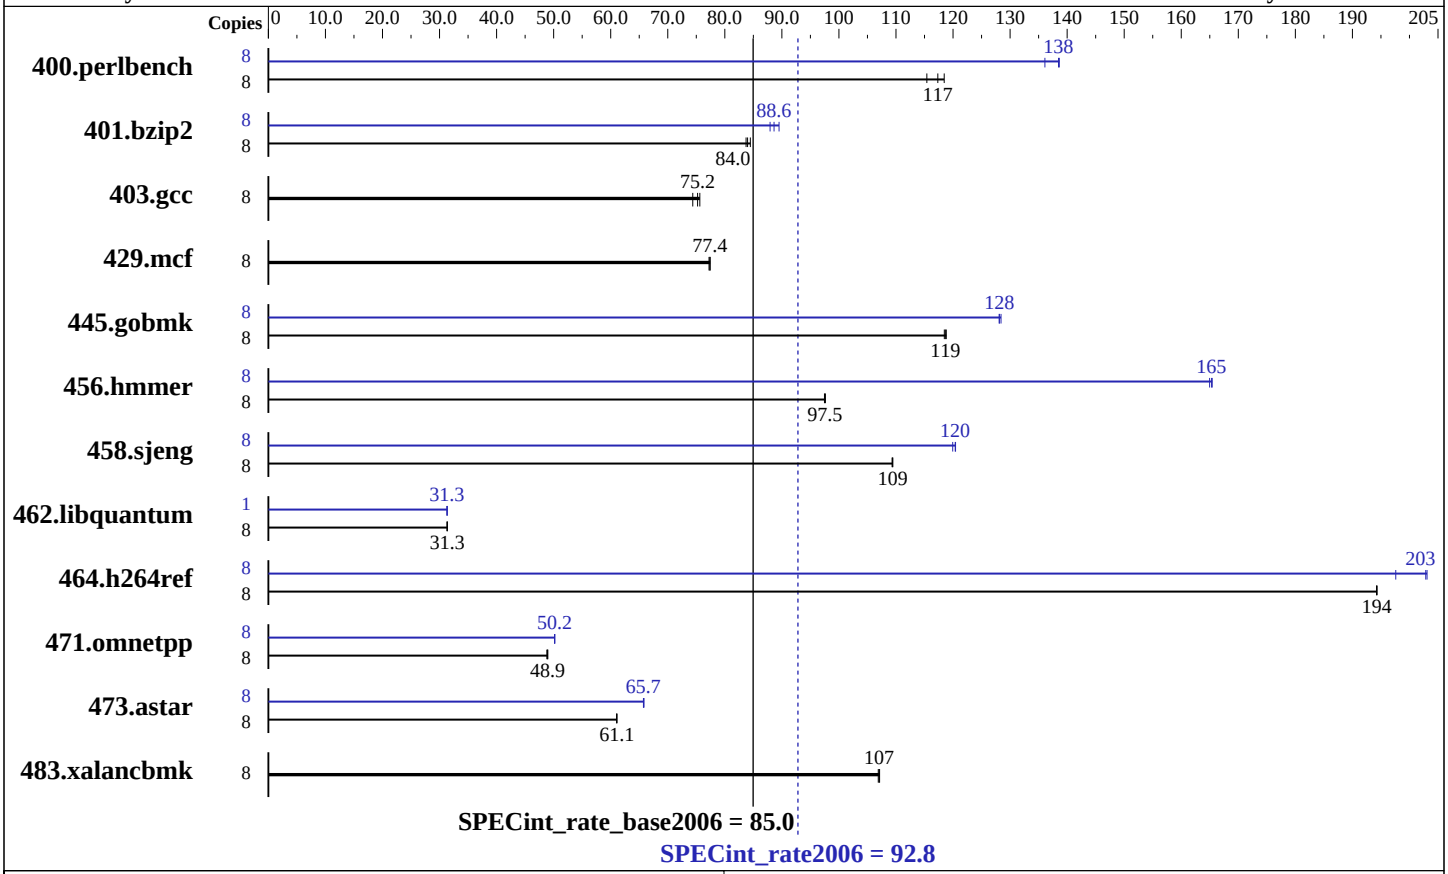

Hardware

CPU Name:	Intel Xeon E5410
CPU Characteristics:	
CPU MHz:	2330
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (8 * 1 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem:	1 x SATA-2, 160GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run Level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.17.10.50 MicroQuill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX201 (Intel Xeon E5410)

SPECint_rate2006 = 92.8

SPECint_rate_base2006 = 85.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	660	118	677	115	**666**	**117**	8	564	139	**564**	**138**	574	136
401.bzip2	8	**919**	**84.0**	914	84.5	922	83.7	8	863	89.5	**871**	**88.6**	878	87.9
403.gcc	8	852	75.6	**856**	**75.2**	866	74.4	8	852	75.6	**856**	**75.2**	866	74.4
429.mcf	8	942	77.4	**943**	**77.4**	945	77.2	8	942	77.4	**943**	**77.4**	945	77.2
445.gobmk	8	708	118	**707**	**119**	706	119	8	655	128	**655**	**128**	654	128
456.hmmer	8	**765**	**97.5**	765	97.6	766	97.5	8	451	165	452	165	**451**	**165**
458.sjeng	8	886	109	**885**	**109**	885	109	8	**804**	**120**	804	120	807	120
462.libquantum	8	5288	31.3	**5289**	**31.3**	5290	31.3	1	662	31.3	**661**	**31.3**	661	31.3
464.h264ref	8	911	194	912	194	**911**	**194**	8	**873**	**203**	896	198	872	203
471.omnetpp	8	1024	48.8	1021	49.0	**1022**	**48.9**	8	996	50.2	**997**	**50.2**	997	50.2
473.astar	8	**920**	**61.1**	920	61.0	920	61.1	8	853	65.8	**854**	**65.7**	854	65.7
483.xalancbmk	8	515	107	516	107	**516**	**107**	8	515	107	516	107	**516**	**107**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch Enabled
```

General Notes

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:50:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.