



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itautec

### SPECfp®\_rate2006 = 41.3

### Servidor Itautec MX221 (Intel Xeon E5430)

### SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001


Test date: Apr-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

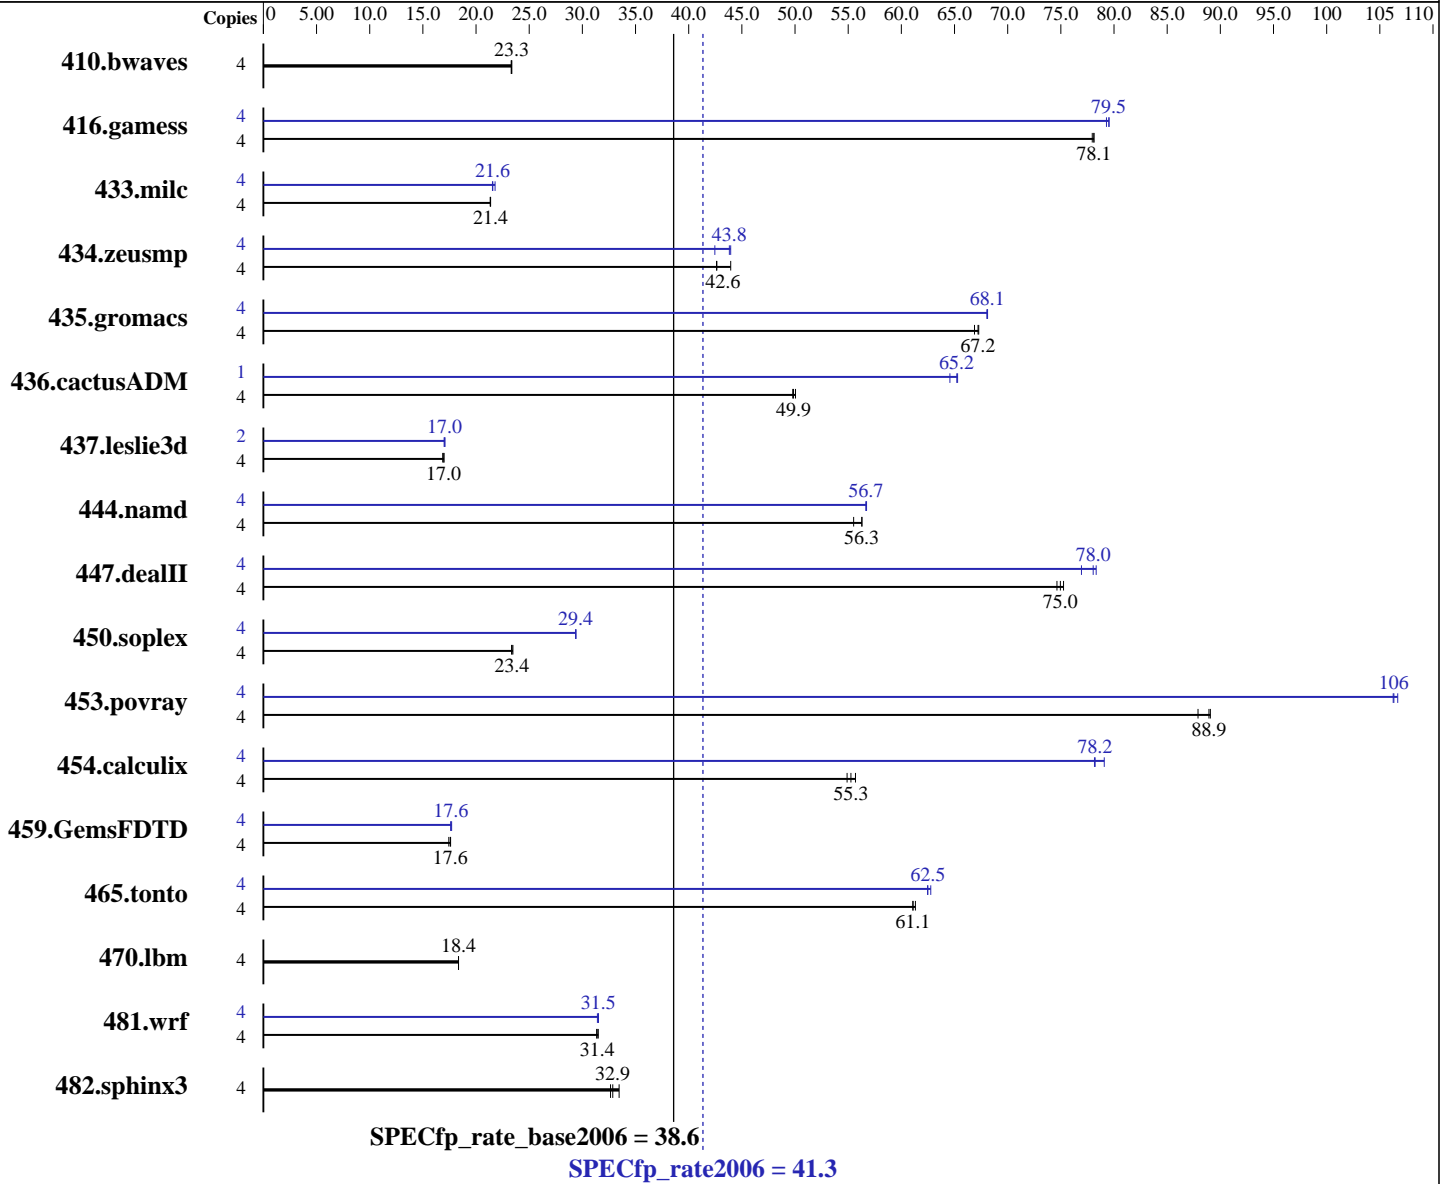

### Hardware

CPU Name: Intel Xeon E5430  
 CPU Characteristics:  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler for Linux version 10.1 Build 20080112 Package ID: l\_cc\_p\_10.1.012, l\_fc\_p\_10.1.012  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 41.3

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001

Test date: Apr-2008

Test sponsor: Itaotec

Hardware Availability: Dec-2007

Tested by: Itaotec

Software Availability: Jan-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 \* 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)  
Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.17.10.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<u>2328</u>	<u>23.3</u>	2332	23.3	2327	23.4	4	<u>2328</u>	<u>23.3</u>	2332	23.3	2327	23.4
416.gamess	4	1005	78.0	1003	78.1	<u>1003</u>	<u>78.1</u>	4	<u>985</u>	<u>79.5</u>	988	79.3	985	79.5
433.milc	4	1721	21.3	1718	21.4	<u>1719</u>	<u>21.4</u>	4	<u>1702</u>	<u>21.6</u>	1704	21.5	1685	21.8
434.zeusmp	4	<u>853</u>	<u>42.6</u>	854	42.6	828	44.0	4	<u>831</u>	<u>43.8</u>	828	43.9	857	42.5
435.gromacs	4	<u>425</u>	<u>67.2</u>	427	66.9	425	67.3	4	419	68.1	420	68.0	<u>419</u>	<u>68.1</u>
436.cactusADM	4	955	50.0	<u>959</u>	<u>49.9</u>	960	49.8	1	185	64.6	<u>183</u>	<u>65.2</u>	183	65.3
437.leslie3d	4	2213	17.0	2230	16.9	<u>2217</u>	<u>17.0</u>	2	<u>1103</u>	<u>17.0</u>	1106	17.0	1101	17.1
444.namd	4	578	55.5	570	56.3	<u>570</u>	<u>56.3</u>	4	566	56.7	<u>566</u>	<u>56.7</u>	566	56.7
447.dealII	4	613	74.6	<u>611</u>	<u>75.0</u>	608	75.3	4	595	76.9	584	78.3	<u>586</u>	<u>78.0</u>
450.soplex	4	<u>1427</u>	<u>23.4</u>	1429	23.3	1422	23.5	4	<u>1135</u>	<u>29.4</u>	1135	29.4	1136	29.4
453.povray	4	239	89.1	<u>239</u>	<u>88.9</u>	242	87.9	4	<u>200</u>	<u>106</u>	199	107	200	106
454.calculix	4	<u>597</u>	<u>55.3</u>	593	55.7	601	54.9	4	<u>422</u>	<u>78.2</u>	417	79.1	422	78.2
459.GemsFDTD	4	<u>2414</u>	<u>17.6</u>	2410	17.6	2434	17.4	4	2397	17.7	2408	17.6	<u>2406</u>	<u>17.6</u>
465.tonto	4	642	61.3	644	61.1	<u>644</u>	<u>61.1</u>	4	630	62.5	627	62.8	<u>630</u>	<u>62.5</u>
470.lbm	4	<u>2995</u>	<u>18.4</u>	2995	18.3	2994	18.4	4	<u>2995</u>	<u>18.4</u>	2995	18.3	2994	18.4
481.wrf	4	1426	31.3	<u>1423</u>	<u>31.4</u>	1419	31.5	4	1418	31.5	1422	31.4	<u>1418</u>	<u>31.5</u>
482.sphinx3	4	2388	32.6	<u>2373</u>	<u>32.9</u>	2330	33.5	4	2388	32.6	<u>2373</u>	<u>32.9</u>	2330	33.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 436.cactusADM at peak.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 41.3

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Apr-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Platform Notes

BIOS configuration:  
Hardware Prefetch Disabled

## General Notes

This result was measured on the Servidor Itaotec MX201.  
The Servidor Itaotec MX221 and the Servidor Itaotec MX201 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 41.3

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Apr-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Base Optimization Flags

C benchmarks:  
-fast  
  
C++ benchmarks:  
-fast  
  
Fortran benchmarks:  
-fast  
  
Benchmarks using both Fortran and C:  
-fast

## Peak Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks (except as noted below):  
icpc  
  
450.soplex: /opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib  
-I/opt/intel/cc/10.1.012/include  
  
Fortran benchmarks (except as noted below):  
ifort  
  
437.leslie3d: /opt/intel/fc/10.1.012/bin/ifort -L/opt/intel/fc/10.1.012/lib  
-I/opt/intel/fc/10.1.012/include  
  
Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 41.3

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001

Test date: Apr-2008

Test sponsor: Itaotec

Hardware Availability: Dec-2007

Tested by: Itaotec

Software Availability: Jan-2008

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 41.3

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 38.6

CPU2006 license: 9001

Test sponsor: Itaotec

Tested by: Itaotec

Test date: Apr-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-FP-intel64-linux-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-FP-intel64-linux-flags.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 16:46:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 April 2008.