SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2352, 2.10 GHz)

SPECint®_rate2006 = 94.6

SPECint_rate_base2006 = 82.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

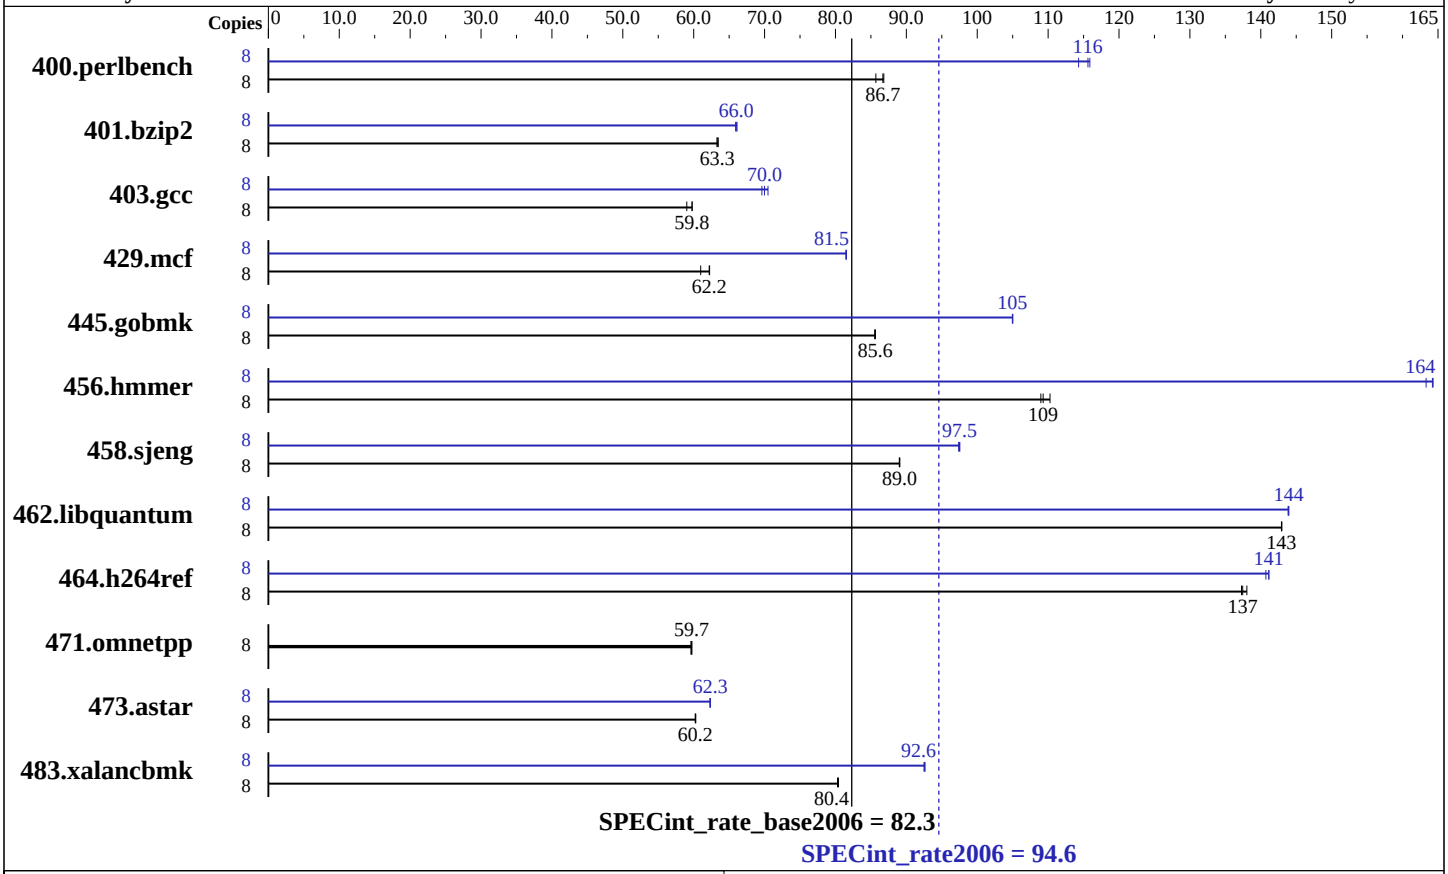

Hardware

CPU Name:	AMD Opteron 2352
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8 x 2 GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run Level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2352, 2.10 GHz)

SPECint_rate2006 = 94.6

SPECint_rate_base2006 = 82.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**902**	**86.7**	900	86.8	912	85.7	8	684	114	674	116	**676**	**116**
401.bzip2	8	1216	63.5	**1219**	**63.3**	1219	63.3	8	1171	65.9	1168	66.1	**1169**	**66.0**
403.gcc	8	1091	59.0	1077	59.8	**1078**	**59.8**	8	925	69.6	914	70.5	**920**	**70.0**
429.mcf	8	1196	61.0	**1173**	**62.2**	1172	62.2	8	895	81.5	895	81.5	**895**	**81.5**
445.gobmk	8	981	85.5	980	85.6	**980**	**85.6**	8	799	105	800	105	**799**	**105**
456.hmmer	8	685	109	677	110	**683**	**109**	8	457	163	454	164	**455**	**164**
458.sjeng	8	1087	89.1	**1087**	**89.0**	1088	89.0	8	994	97.4	**993**	**97.5**	992	97.5
462.libquantum	8	1160	143	1159	143	**1160**	**143**	8	1152	144	1152	144	**1152**	**144**
464.h264ref	8	**1288**	**137**	1290	137	1283	138	8	1254	141	1258	141	**1254**	**141**
471.omnetpp	8	839	59.6	837	59.7	**837**	**59.7**	8	839	59.6	837	59.7	**837**	**59.7**
473.astar	8	931	60.3	932	60.2	**932**	**60.2**	8	**901**	**62.3**	901	62.4	901	62.3
483.xalancbmk	8	688	80.3	686	80.4	**687**	**80.4**	8	597	92.5	**596**	**92.6**	596	92.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set /proc/sys/vm/nr_hugepages=1200
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

471.omnetpp: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:150 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap

Peak Other Flags

C benchmarks (except as noted below):
-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):
-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:08:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 May 2008.