



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5205)

SPECfp<sup>®</sup>\_rate2006 = 36.4

SPECfp\_rate\_base2006 = 33.5

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

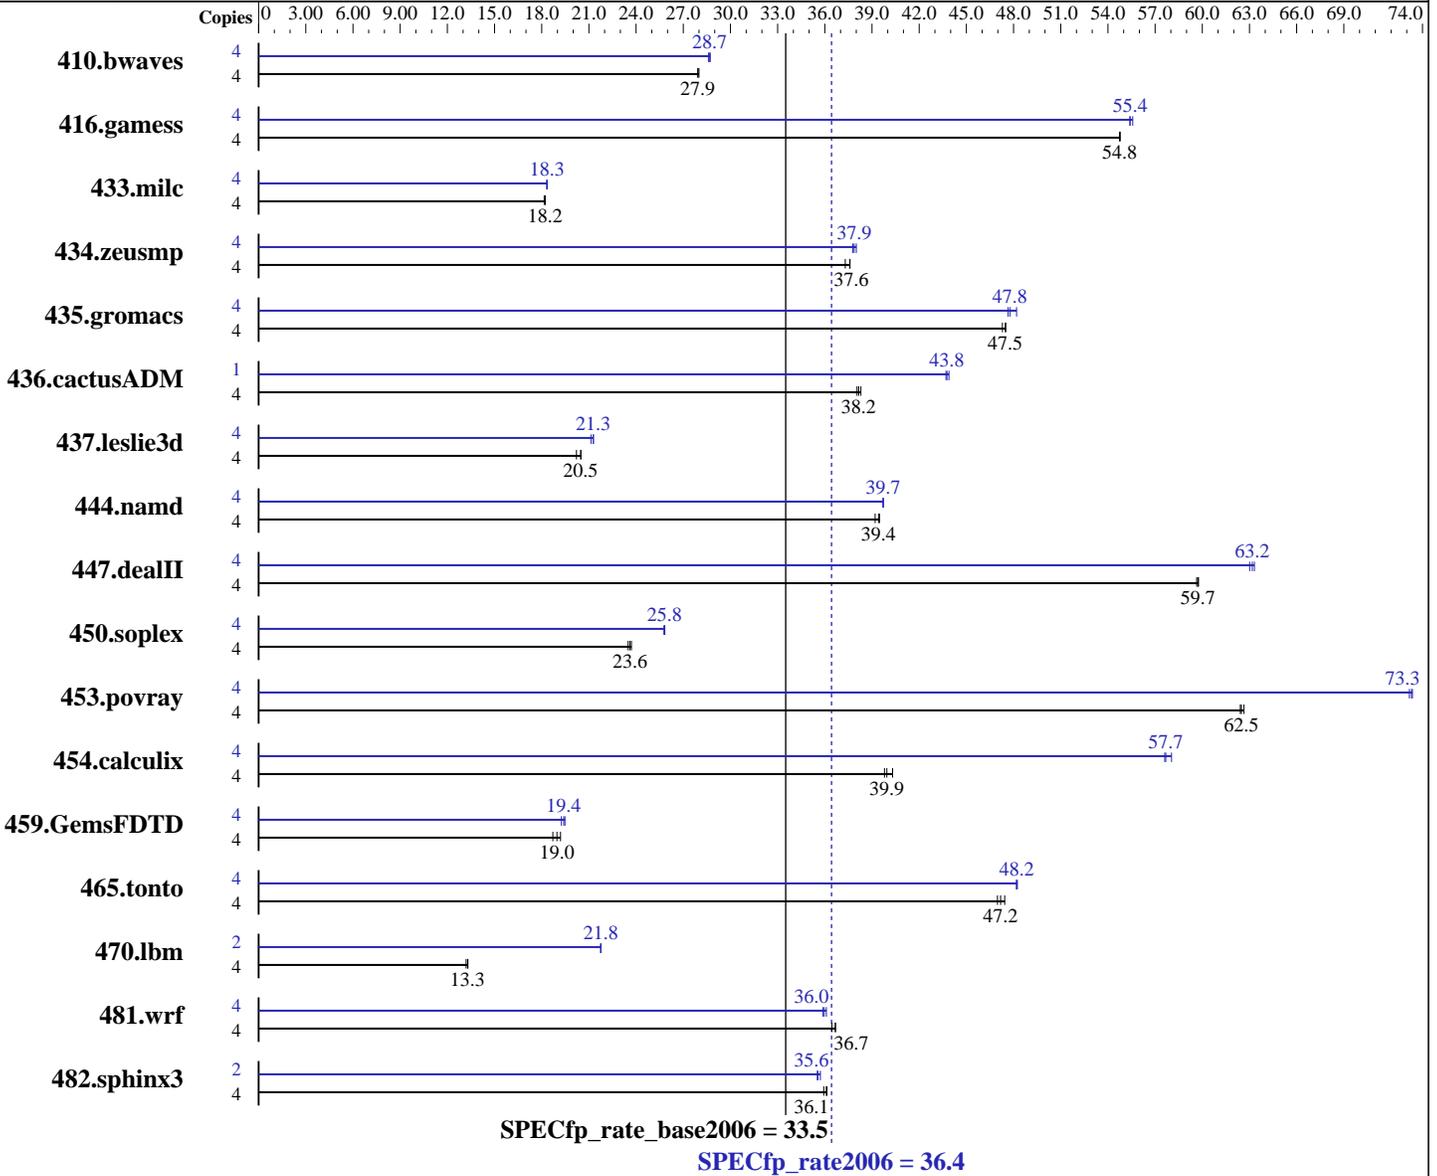

### Hardware

CPU Name: Intel Xeon E5205  
 CPU Characteristics: 1.86 GHz, 6 MB L2, 1066 MHz bus  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1,  
Kernel 2.6.16.46-0.12-smpp  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and  
Linux64  
version 10.1 Build 20070913 Package ID:  
l\_cc\_p\_10.1.008,  
l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5205)

SPECfp\_rate2006 = 36.4

SPECfp\_rate\_base2006 = 33.5

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Apr-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x250 GB SATAII, 7200RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.tar.gz, Version 2.17

## Results Table

| Benchmark     | Base   |             |             |             |             |             |             | Peak   |             |             |             |             |             |             |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
|               | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 410.bwaves    | 4      | 1942        | 28.0        | 1946        | 27.9        | <b>1946</b> | <b>27.9</b> | 4      | 1893        | 28.7        | 1901        | 28.6        | <b>1895</b> | <b>28.7</b> |
| 416.gamess    | 4      | <b>1430</b> | <b>54.8</b> | 1430        | 54.8        | 1431        | 54.7        | 4      | 1414        | 55.4        | 1409        | 55.6        | <b>1413</b> | <b>55.4</b> |
| 433.milc      | 4      | 2022        | 18.2        | <b>2016</b> | <b>18.2</b> | 2015        | 18.2        | 4      | 2005        | 18.3        | 2002        | 18.3        | <b>2002</b> | <b>18.3</b> |
| 434.zeusmp    | 4      | 976         | 37.3        | 968         | 37.6        | <b>968</b>  | <b>37.6</b> | 4      | 958         | 38.0        | 964         | 37.8        | <b>961</b>  | <b>37.9</b> |
| 435.gromacs   | 4      | 601         | 47.5        | 604         | 47.3        | <b>602</b>  | <b>47.5</b> | 4      | 593         | 48.2        | 599         | 47.7        | <b>598</b>  | <b>47.8</b> |
| 436.cactusADM | 4      | 1248        | 38.3        | <b>1253</b> | <b>38.2</b> | 1256        | 38.0        | 1      | 273         | 43.7        | 272         | 43.9        | <b>273</b>  | <b>43.8</b> |
| 437.leslie3d  | 4      | 1861        | 20.2        | <b>1836</b> | <b>20.5</b> | 1835        | 20.5        | 4      | 1767        | 21.3        | <b>1767</b> | <b>21.3</b> | 1779        | 21.1        |
| 444.namd      | 4      | 818         | 39.2        | 813         | 39.5        | <b>814</b>  | <b>39.4</b> | 4      | 808         | 39.7        | 808         | 39.7        | <b>808</b>  | <b>39.7</b> |
| 447.dealII    | 4      | 767         | 59.6        | 766         | 59.8        | <b>766</b>  | <b>59.7</b> | 4      | <b>724</b>  | <b>63.2</b> | 723         | 63.3        | 726         | 63.0        |
| 450.soplex    | 4      | 1420        | 23.5        | <b>1413</b> | <b>23.6</b> | 1407        | 23.7        | 4      | <b>1292</b> | <b>25.8</b> | 1292        | 25.8        | 1295        | 25.8        |
| 453.povray    | 4      | 340         | 62.6        | 341         | 62.4        | <b>341</b>  | <b>62.5</b> | 4      | 291         | 73.2        | 290         | 73.4        | <b>290</b>  | <b>73.3</b> |
| 454.calculix  | 4      | 829         | 39.8        | <b>826</b>  | <b>39.9</b> | 819         | 40.3        | 4      | 569         | 58.0        | 573         | 57.6        | <b>572</b>  | <b>57.7</b> |
| 459.GemsFDTD  | 4      | 2211        | 19.2        | <b>2237</b> | <b>19.0</b> | 2269        | 18.7        | 4      | 2179        | 19.5        | 2205        | 19.2        | <b>2188</b> | <b>19.4</b> |
| 465.tonto     | 4      | 830         | 47.4        | 838         | 47.0        | <b>834</b>  | <b>47.2</b> | 4      | 816         | 48.2        | 817         | 48.2        | <b>816</b>  | <b>48.2</b> |
| 470.lbm       | 4      | 4166        | 13.2        | <b>4135</b> | <b>13.3</b> | 4130        | 13.3        | 2      | <b>1263</b> | <b>21.8</b> | 1264        | 21.7        | 1262        | 21.8        |
| 481.wrf       | 4      | <b>1219</b> | <b>36.7</b> | 1218        | 36.7        | 1226        | 36.4        | 4      | 1245        | 35.9        | 1238        | 36.1        | <b>1242</b> | <b>36.0</b> |
| 482.sphinx3   | 4      | 2157        | 36.1        | 2170        | 35.9        | <b>2160</b> | <b>36.1</b> | 2      | 1097        | 35.5        | 1091        | 35.7        | <b>1096</b> | <b>35.6</b> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled  
Intel SpeedStep Technology: Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5205)

SPECfp\_rate2006 = 36.4

SPECfp\_rate\_base2006 = 33.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5205)

**SPECfp\_rate2006 = 36.4**

**SPECfp\_rate\_base2006 = 33.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5205)

**SPECfp\_rate2006 = 36.4**

**SPECfp\_rate\_base2006 = 33.5**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Apr-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2007

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5205)

**SPECfp\_rate2006 = 36.4**

**SPECfp\_rate\_base2006 = 33.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:21:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 May 2008.