



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp[®]2006 = 21.6

SPECfp_base2006 = 18.2

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

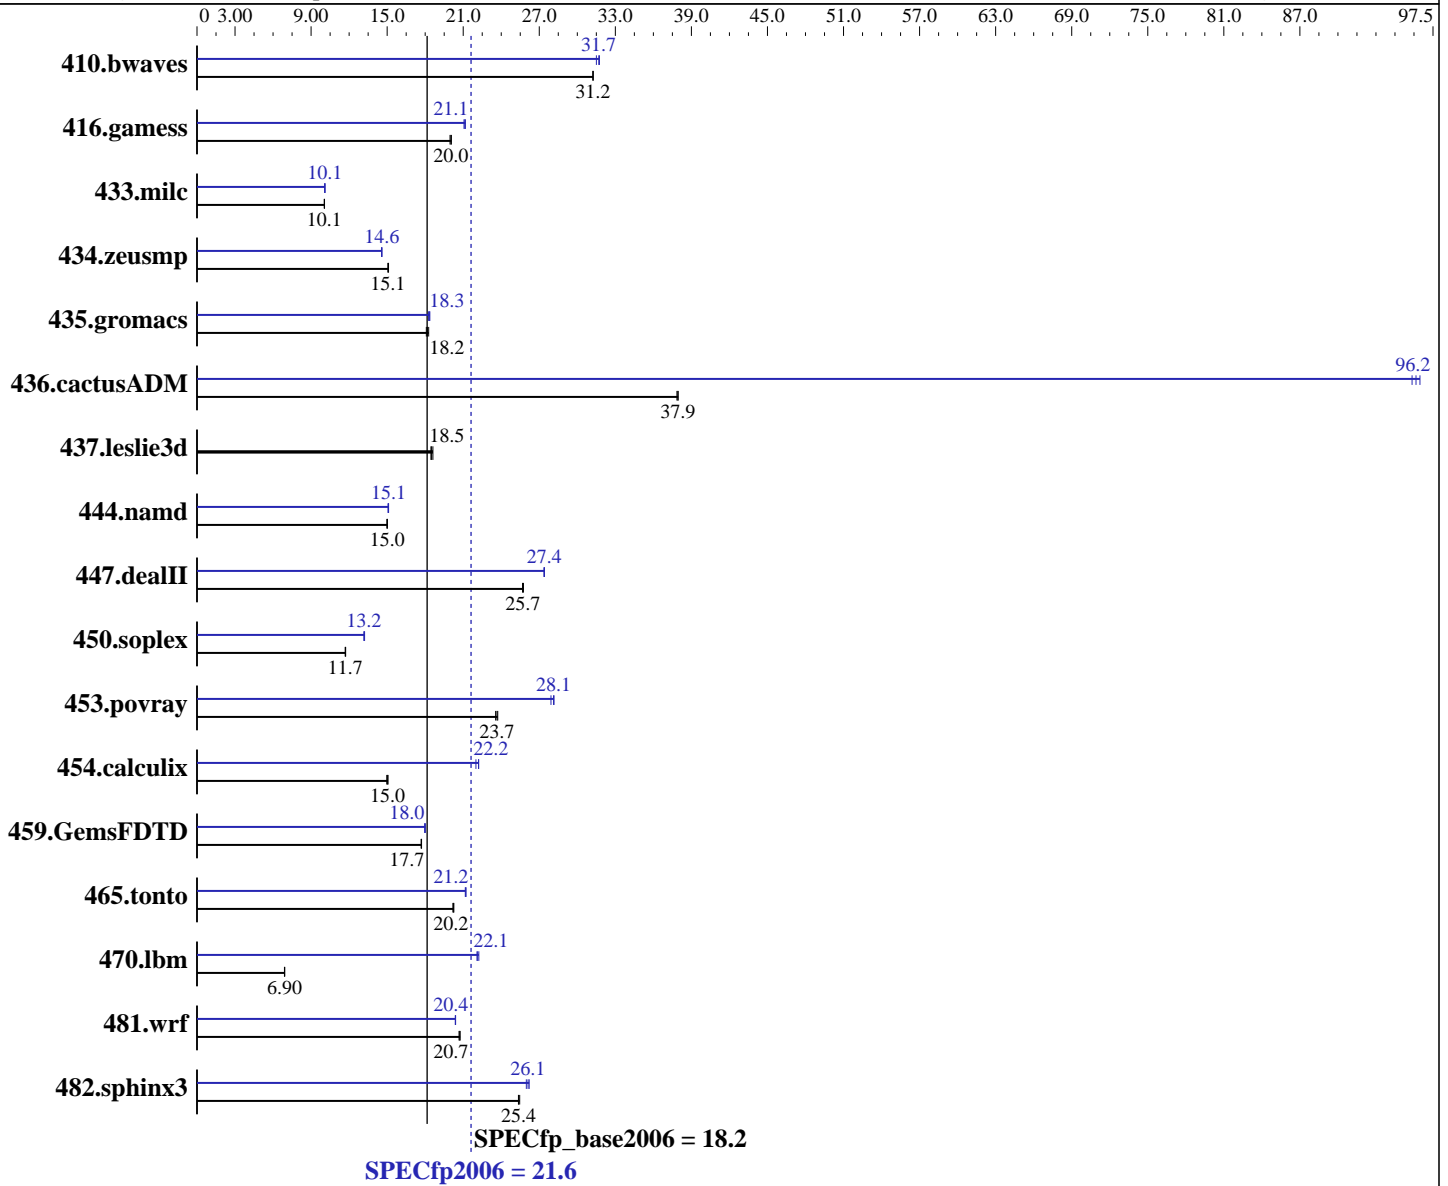

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics: 2.83 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smpp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp2006 = **21.6**

SPECfp_base2006 = **18.2**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	435	31.2	435	31.2	435	31.2	431	31.5	428	31.7	429	31.7
416.gamess	976	20.1	981	20.0	978	20.0	930	21.1	927	21.1	925	21.2
433.milc	913	10.1	915	10.0	913	10.1	912	10.1	910	10.1	909	10.1
434.zeusmp	602	15.1	604	15.1	604	15.1	624	14.6	625	14.6	624	14.6
435.gromacs	395	18.1	391	18.3	393	18.2	390	18.3	389	18.4	391	18.3
436.cactusADM	316	37.9	315	37.9	315	38.0	124	96.5	125	95.8	124	96.2
437.leslie3d	505	18.6	508	18.5	509	18.5	505	18.6	508	18.5	509	18.5
444.namd	535	15.0	535	15.0	534	15.0	531	15.1	532	15.1	531	15.1
447.dealII	444	25.7	445	25.7	445	25.7	417	27.4	417	27.4	418	27.4
450.soplex	711	11.7	713	11.7	712	11.7	631	13.2	633	13.2	633	13.2
453.povray	224	23.7	226	23.6	225	23.7	189	28.2	191	27.9	189	28.1
454.calculix	548	15.1	549	15.0	551	15.0	375	22.0	371	22.2	371	22.2
459.GemsFDTD	599	17.7	600	17.7	600	17.7	589	18.0	590	18.0	590	18.0
465.tonto	486	20.3	486	20.2	488	20.2	464	21.2	464	21.2	465	21.2
470.lbm	1984	6.93	1992	6.90	1990	6.90	618	22.2	622	22.1	621	22.1
481.wrf	538	20.8	540	20.7	539	20.7	548	20.4	548	20.4	548	20.4
482.sphinx3	766	25.5	768	25.4	769	25.4	750	26.0	746	26.1	744	26.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp2006 = 21.6

SPECfp_base2006 = 18.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/120Lj(Intel Xeon E5440) and the Bull NovaScale T860 E1(Intel Xeon E5440,2.83GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon E5440) model.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp2006 = 21.6

SPECfp_base2006 = 18.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp2006 = 21.6

SPECfp_base2006 = 18.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon E5440)

SPECfp2006 = 21.6

SPECfp_base2006 = 18.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Peak Optimization Flags (Continued)

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:20:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.