



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]2006 = 19.4

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = 17.4

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2008

Hardware Availability: May-2008

Software Availability: May-2008

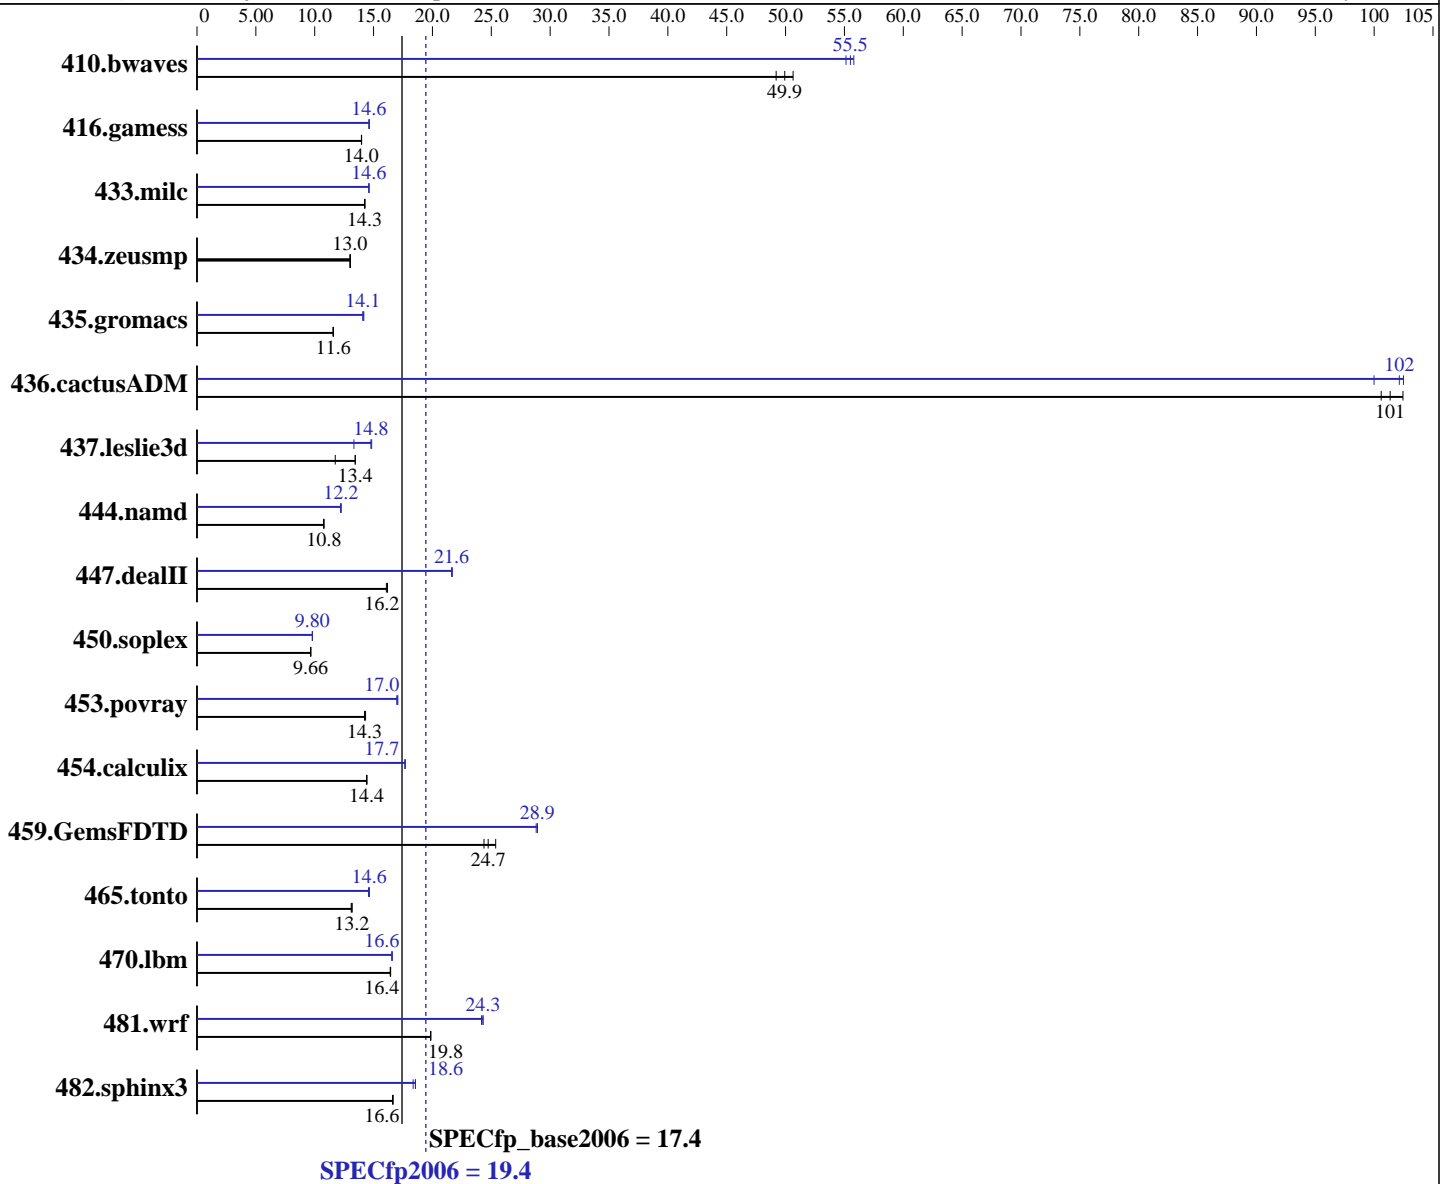

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User SuSE Run Level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = **19.4**

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = **17.4**

CPU2006 license: 22

Test date: Apr-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8x2GB PC2-5300P, CL5, dual rank ECC)
 Disk Subsystem: 1 x 400 GB SATA II
 Other Hardware: None

Other Software: binutils 2.18.50

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	276	49.2	<u>272</u>	<u>49.9</u>	268	50.6	<u>245</u>	<u>55.5</u>	244	55.8	246	55.1
416.gamess	1400	14.0	<u>1401</u>	<u>14.0</u>	1402	14.0	<u>1339</u>	<u>14.6</u>	1341	14.6	1338	14.6
433.milc	645	14.2	<u>644</u>	<u>14.3</u>	644	14.3	629	14.6	628	14.6	<u>629</u>	<u>14.6</u>
434.zeusmp	700	13.0	<u>700</u>	<u>13.0</u>	698	13.0	700	13.0	<u>700</u>	<u>13.0</u>	698	13.0
435.gromacs	<u>616</u>	<u>11.6</u>	616	11.6	618	11.5	507	14.1	<u>506</u>	<u>14.1</u>	504	14.2
436.cactusADM	117	102	<u>118</u>	<u>101</u>	119	101	120	100	<u>117</u>	<u>102</u>	117	102
437.leslie3d	699	13.4	800	11.7	<u>700</u>	<u>13.4</u>	705	13.3	633	14.8	<u>636</u>	<u>14.8</u>
444.namd	746	10.8	<u>744</u>	<u>10.8</u>	744	10.8	<u>656</u>	<u>12.2</u>	655	12.2	658	12.2
447.dealII	<u>708</u>	<u>16.2</u>	711	16.1	707	16.2	529	21.6	<u>529</u>	<u>21.6</u>	528	21.7
450.soplex	<u>863</u>	<u>9.66</u>	864	9.65	863	9.67	850	9.81	851	9.80	<u>851</u>	<u>9.80</u>
453.povray	374	14.2	371	14.3	<u>373</u>	<u>14.3</u>	312	17.1	313	17.0	<u>313</u>	<u>17.0</u>
454.calculix	573	14.4	<u>572</u>	<u>14.4</u>	571	14.4	<u>467</u>	<u>17.7</u>	467	17.7	467	17.7
459.GemsFDTD	418	25.4	<u>429</u>	<u>24.7</u>	435	24.4	368	28.8	367	28.9	<u>367</u>	<u>28.9</u>
465.tonto	<u>748</u>	<u>13.2</u>	751	13.1	747	13.2	<u>673</u>	<u>14.6</u>	675	14.6	672	14.6
470.lbm	835	16.5	<u>836</u>	<u>16.4</u>	837	16.4	<u>829</u>	<u>16.6</u>	829	16.6	829	16.6
481.wrf	563	19.8	<u>563</u>	<u>19.8</u>	562	19.9	460	24.3	462	24.2	<u>460</u>	<u>24.3</u>
482.sphinx3	1173	16.6	<u>1172</u>	<u>16.6</u>	1170	16.7	1061	18.4	<u>1050</u>	<u>18.6</u>	1050	18.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```

powersave -f is applied to set CPU to maximum frequency prior to run
stacksize is set to unlimited prior to run
ulimit -l 2457600
PGI_HUGE_PAGES set to 150
(Total number of huge pages available is 1200)

```

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.4

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = 17.4

CPU2006 license: 22

Test date: Apr-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur --zc_eh
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mconcur -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.4

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = 17.4

CPU2006 license: 22

Test date: Apr-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcCpp

Fortran benchmarks (except as noted below):

pgf95

459.GemsFDTD: pathf95

Benchmarks using both Fortran and C:

pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.4

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = 17.4

CPU2006 license: 22

Test date: Apr-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Msafepttr -Mconcur
-Mfprelaxed -Mipa=jobs:4 -Mipa=inline -Mipa=arg
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64
-Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
-CG:locs_shallow_depth=1 -m3dnw -apo

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge:896 -Mnodepch
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32 -apo

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32 -apo

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-Mconcur -Mloop32 -Mpre -Mfprelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=noaltcode -Mprefetch=t0 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mconcur=noaltcode(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge:896 -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.4

CELSIUS V840, AMD Opteron 2356 (2.3 GHz)

SPECfp_base2006 = 17.4

CPU2006 license: 22

Test date: Apr-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -apo

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmartalloc=huge:896
-Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur
-Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur -Mdse
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=jobs:4(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-fastsse -Msmartalloc=huge:896 -Mloop32 -Mprefetch=t0
-Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc
-Mprefetch=distance:8 -Mconcur=noaltcode -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:16:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.