



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 69.5

Servidor Itaotec MX201 (Intel Xeon E5440)

SPECint_rate_base2006 = 60.4

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Apr-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

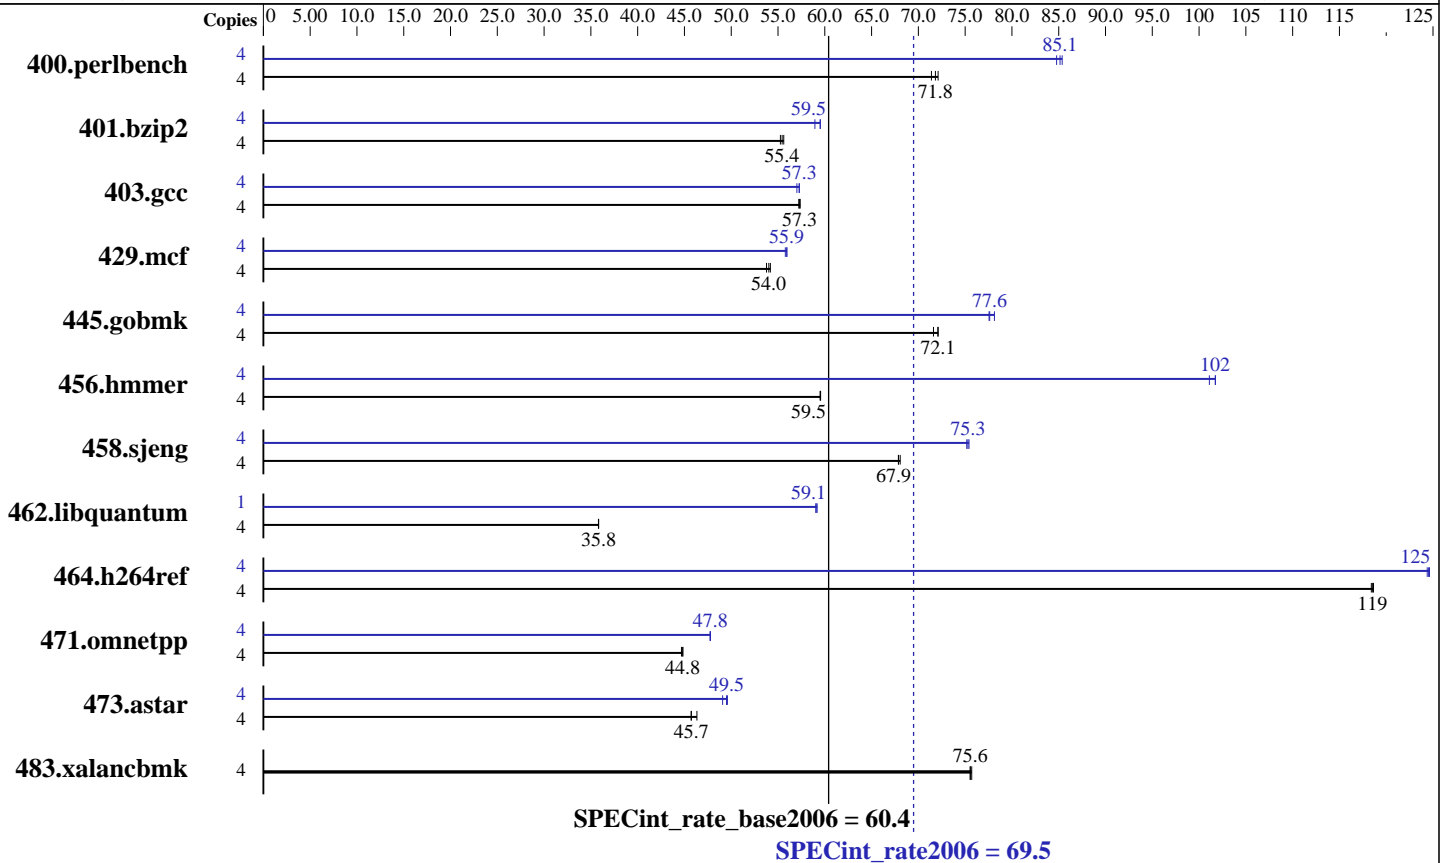

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics:
 CPU MHz: 2830
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
 Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.10.50
 MicroQuill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 69.5

Servidor Itautec MX201 (Intel Xeon E5440)

SPECint_rate_base2006 = 60.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	544	71.8	542	72.1	547	71.4	4	458	85.4	459	85.1	461	84.8
401.bzip2	4	699	55.3	696	55.4	694	55.6	4	649	59.5	649	59.5	655	58.9
403.gcc	4	562	57.3	561	57.4	563	57.2	4	562	57.3	562	57.3	565	57.0
429.mcf	4	673	54.2	675	54.0	678	53.8	4	654	55.8	652	56.0	652	55.9
445.gobmk	4	586	71.6	582	72.1	582	72.1	4	541	77.6	541	77.6	537	78.1
456.hammer	4	627	59.6	627	59.5	627	59.5	4	367	102	369	101	367	102
458.sjeng	4	713	67.9	711	68.1	713	67.9	4	644	75.2	642	75.4	643	75.3
462.libquantum	4	2314	35.8	2314	35.8	2313	35.8	1	351	59.1	351	59.0	350	59.2
464.h264ref	4	748	118	746	119	747	119	4	711	125	710	125	712	124
471.omnetpp	4	560	44.7	558	44.8	558	44.8	4	523	47.8	524	47.7	523	47.8
473.astar	4	606	46.3	614	45.7	614	45.7	4	566	49.6	572	49.1	567	49.5
483.xalancbmk	4	365	75.6	365	75.5	365	75.7	4	365	75.6	365	75.5	365	75.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 462.libquantum at peak.

Platform Notes

BIOS configuration:
Hardware Prefetch Enabled

General Notes

This result was measured on the Servidor Itautec MX201.
The Servidor Itautec MX201 and the Servidor Itautec MX221 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 69.5

Servidor Itautec MX201 (Intel Xeon E5440)

SPECint_rate_base2006 = 60.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 69.5

Servidor Itautec MX201 (Intel Xeon E5440)

SPECint_rate_base2006 = 60.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 69.5

Servidor Itautec MX201 (Intel Xeon E5440)

SPECint_rate_base2006 = 60.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 17:18:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.