



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 104

PowerEdge R805, AMD Opteron 2358 SE (2.40 GHz)

SPECint_rate_base2006 = 90.3

CPU2006 license: 55


Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

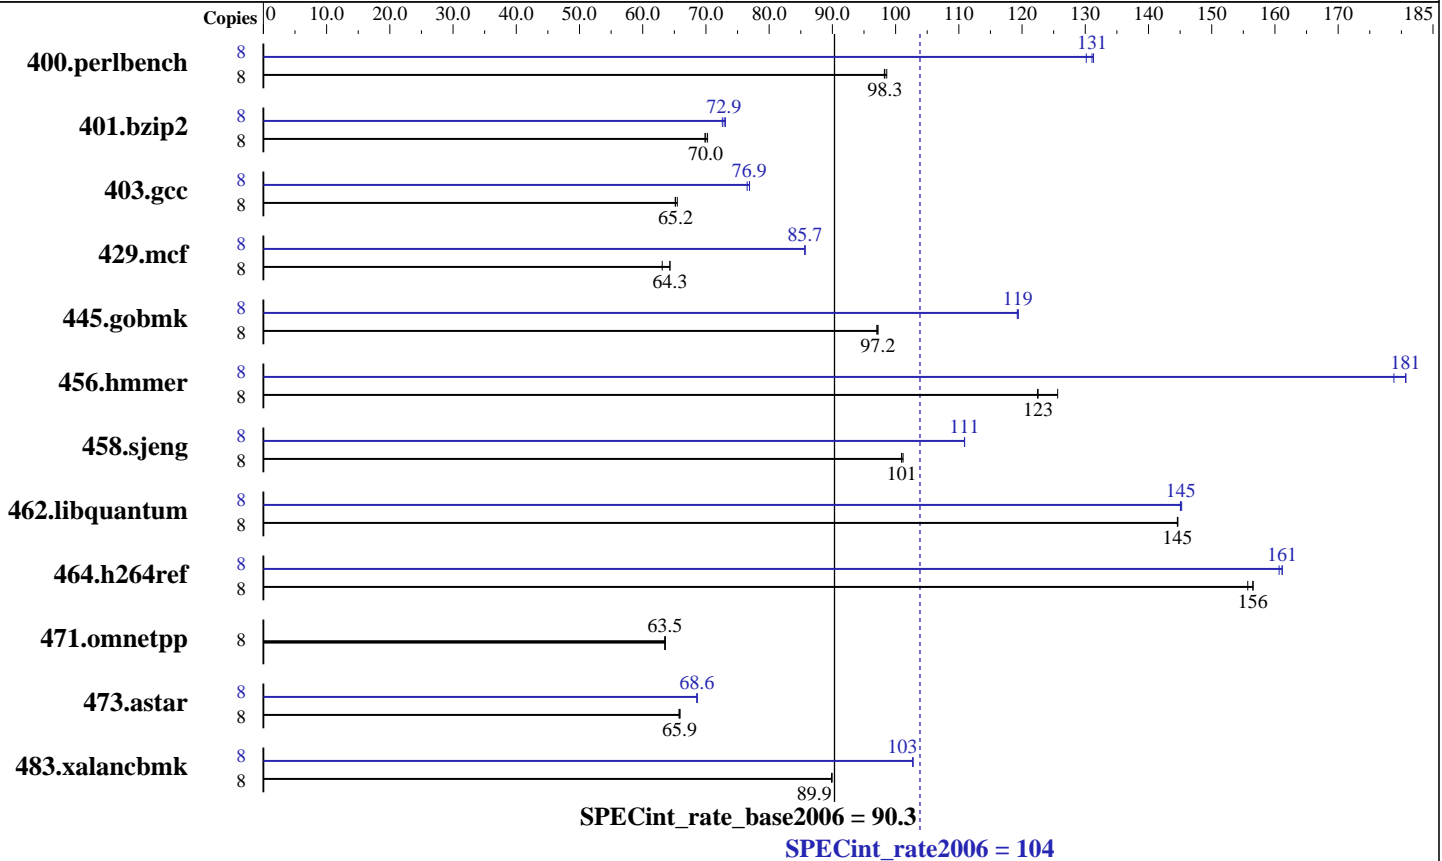

Hardware

CPU Name: AMD Opteron 2358 SE
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8x2GB, DDR2-667, CL5, Reg, Dual Rank)
 Disk Subsystem: 1x73GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 104

PowerEdge R805, AMD Opteron 2358 SE (2.40 GHz)

SPECint_rate_base2006 = 90.3

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<u>795</u>	<u>98.3</u>	796	98.2	793	98.6	8	600	130	595	131	<u>596</u>	<u>131</u>
401.bzip2	8	1099	70.3	1105	69.8	<u>1103</u>	<u>70.0</u>	8	1063	72.6	1056	73.1	<u>1059</u>	<u>72.9</u>
403.gcc	8	<u>988</u>	<u>65.2</u>	989	65.1	984	65.5	8	842	76.5	<u>838</u>	<u>76.9</u>	837	76.9
429.mcf	8	1157	63.1	<u>1135</u>	<u>64.3</u>	1135	64.3	8	852	85.6	852	85.7	<u>852</u>	<u>85.7</u>
445.gobmk	8	863	97.2	<u>863</u>	<u>97.2</u>	865	97.0	8	703	119	<u>703</u>	<u>119</u>	704	119
456.hmmer	8	610	122	594	126	<u>609</u>	<u>123</u>	8	413	181	417	179	<u>413</u>	<u>181</u>
458.sjeng	8	957	101	<u>959</u>	<u>101</u>	959	101	8	873	111	<u>873</u>	<u>111</u>	873	111
462.libquantum	8	1147	145	<u>1146</u>	<u>145</u>	1146	145	8	1143	145	<u>1142</u>	<u>145</u>	1141	145
464.h264ref	8	1137	156	1131	157	<u>1131</u>	<u>156</u>	8	1099	161	<u>1099</u>	<u>161</u>	1102	161
471.omnetpp	8	<u>787</u>	<u>63.5</u>	788	63.5	787	63.6	8	<u>787</u>	<u>63.5</u>	788	63.5	787	63.6
473.astar	8	852	65.9	<u>853</u>	<u>65.9</u>	854	65.7	8	819	68.6	<u>819</u>	<u>68.6</u>	818	68.6
483.xalancbmk	8	614	89.9	<u>614</u>	<u>89.9</u>	614	89.9	8	<u>537</u>	<u>103</u>	537	103	537	103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 104

PowerEdge R805, AMD Opteron 2358 SE (2.40 GHz)

SPECint_rate_base2006 = 90.3

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 104

PowerEdge R805, AMD Opteron 2358 SE (2.40 GHz)

SPECint_rate_base2006 = 90.3

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
           -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
           -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
          -Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
            -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
            -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
            -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
            -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
            -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
            -fastsse -Msmartalloc=huge:150 -Mfprelaxed
            -tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
                -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
                -tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
              -Mipa=fast(pass 2) -Mipa=inline(pass 2)
              -Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
              -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 104

PowerEdge R805, AMD Opteron 2358 SE (2.40 GHz)

SPECint_rate_base2006 = 90.3

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:16:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.