



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55


Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

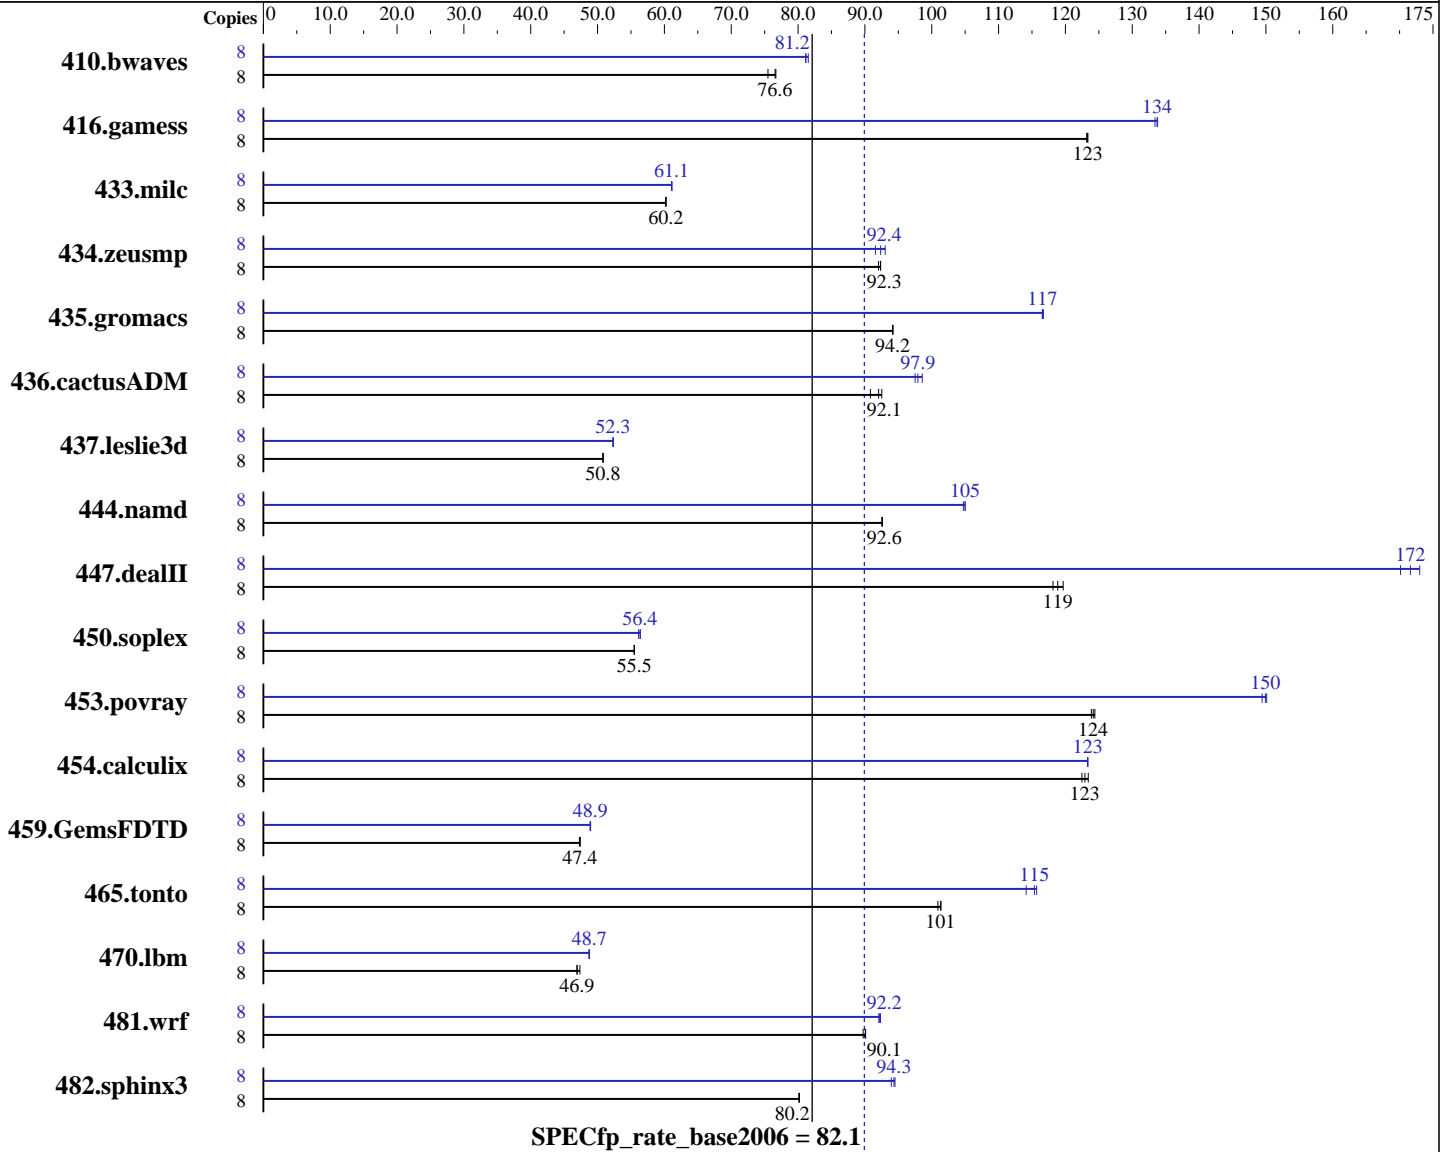

Hardware

CPU Name: AMD Opteron 2360 SE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (8x2GB, DDR2-667, CL5, Reg. Dual Rank)
Disk Subsystem: 1x73GB SAS, 10000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1440	75.5	1420	76.6	1418	76.7	8	1334	81.5	1340	81.1	1339	81.2
416.gamess	8	1270	123	1272	123	1270	123	8	1174	133	1171	134	1171	134
433.milc	8	1219	60.2	1219	60.2	1220	60.2	8	1201	61.1	1202	61.1	1203	61.1
434.zeusmp	8	789	92.3	791	92.0	788	92.4	8	795	91.6	782	93.0	788	92.4
435.gromacs	8	606	94.2	607	94.1	607	94.2	8	490	117	489	117	490	117
436.cactusADM	8	1053	90.8	1033	92.5	1038	92.1	8	976	97.9	970	98.6	980	97.5
437.leslie3d	8	1479	50.8	1480	50.8	1480	50.8	8	1437	52.3	1436	52.4	1438	52.3
444.namd	8	693	92.6	693	92.6	693	92.6	8	611	105	611	105	613	105
447.dealII	8	770	119	775	118	765	120	8	529	173	533	172	538	170
450.soplex	8	1203	55.5	1202	55.5	1202	55.5	8	1188	56.1	1184	56.4	1183	56.4
453.povray	8	344	124	343	124	342	124	8	284	150	285	149	284	150
454.calculix	8	539	122	537	123	535	123	8	535	123	535	123	535	123
459.GemsFDTD	8	1791	47.4	1791	47.4	1795	47.3	8	1736	48.9	1734	49.0	1735	48.9
465.tonto	8	780	101	776	101	777	101	8	690	114	680	116	682	115
470.lbm	8	2343	46.9	2321	47.4	2342	46.9	8	2254	48.8	2255	48.7	2255	48.7
481.wrf	8	996	89.7	992	90.1	992	90.1	8	968	92.3	970	92.2	970	92.1
482.sphinx3	8	1945	80.2	1945	80.2	1945	80.2	8	1650	94.5	1653	94.3	1660	94.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -m3dnow

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

410.bwaves: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 89.9

PowerEdge R805, AMD Opteron 2360 SE (2.50 GHz)

SPECfp_rate_base2006 = 82.1

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Other Flags (Continued)

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:17:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.