



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 27.4

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECfp_rate_base2006 = 26.0

CPU2006 license: 55


Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

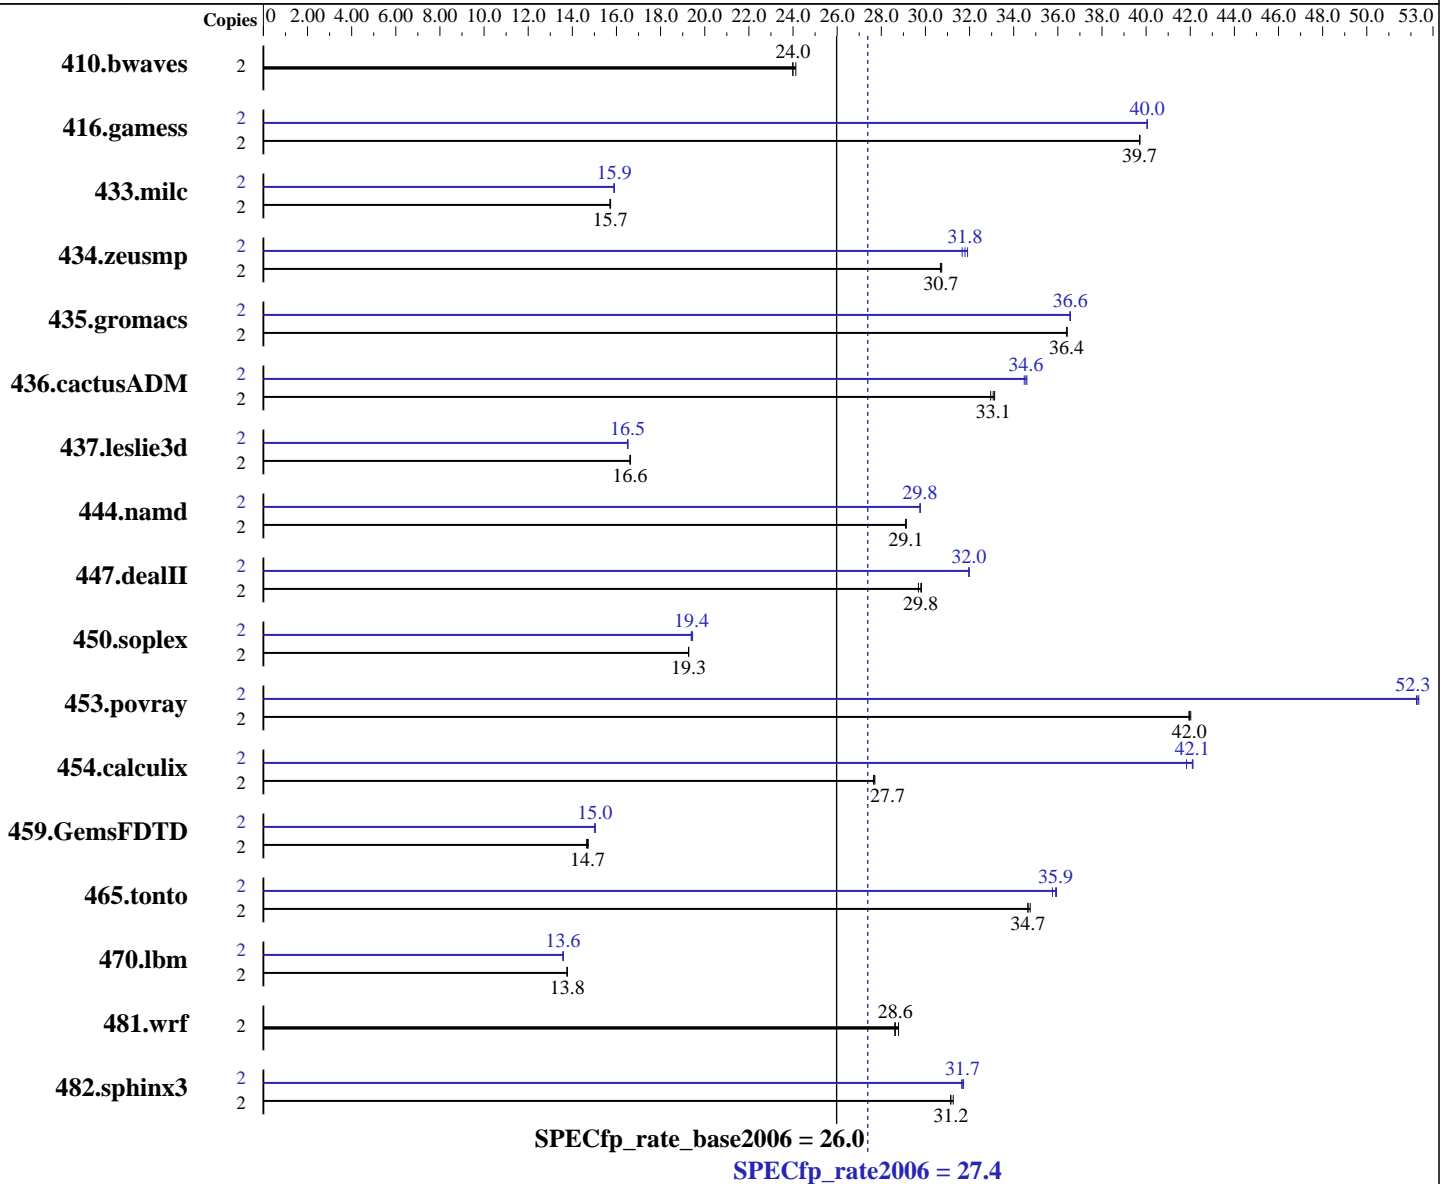

Hardware

CPU Name: Intel Core 2 Extreme X9000
 CPU Characteristics: 800 MHz Bus Speed
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: Windows Vista Ultimate (64-bit)
 Compiler: Intel C++ Compiler for Intel 64, Version 10.1
 Build 20080312 Package ID: w_cc_p_10.1.021
 Intel Visual Fortran Compiler for Intel 64,
 Version 10.0
 Build 20080312 Package ID: w_fc_p_10.1.021
 Microsoft Visual Studio 2005 SP1

Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 27.4

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECfp_rate_base2006 = 26.0

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

L3 Cache: None
Other Cache: None
Memory: 4 GB (2x2 GB 667 MHz CL5 DDR2)
Disk Subsystem: 1 x 120GB SATA 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1 for x64

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	<u>1133</u>	<u>24.0</u>	1127	24.1	1133	24.0	2	<u>1133</u>	<u>24.0</u>	1127	24.1	1133	24.0
416.gamess	2	986	39.7	986	39.7	<u>986</u>	<u>39.7</u>	2	978	40.0	<u>978</u>	<u>40.0</u>	978	40.1
433.milc	2	1169	15.7	<u>1168</u>	<u>15.7</u>	1167	15.7	2	1156	15.9	1154	15.9	<u>1154</u>	<u>15.9</u>
434.zeusmp	2	593	30.7	<u>593</u>	<u>30.7</u>	592	30.7	2	575	31.7	570	31.9	<u>572</u>	<u>31.8</u>
435.gromacs	2	392	36.4	392	36.4	<u>392</u>	<u>36.4</u>	2	<u>391</u>	<u>36.6</u>	391	36.6	390	36.6
436.cactusADM	2	721	33.1	<u>723</u>	<u>33.1</u>	725	33.0	2	<u>692</u>	<u>34.6</u>	693	34.5	691	34.6
437.leslie3d	2	1130	16.6	1132	16.6	<u>1131</u>	<u>16.6</u>	2	<u>1138</u>	<u>16.5</u>	1138	16.5	1139	16.5
444.namd	2	551	29.1	551	29.1	<u>551</u>	<u>29.1</u>	2	539	29.8	539	29.8	<u>539</u>	<u>29.8</u>
447.dealII	2	<u>768</u>	<u>29.8</u>	771	29.7	767	29.8	2	<u>716</u>	<u>32.0</u>	716	32.0	715	32.0
450.soplex	2	866	19.3	866	19.3	<u>866</u>	<u>19.3</u>	2	<u>859</u>	<u>19.4</u>	858	19.5	860	19.4
453.povray	2	254	41.9	<u>254</u>	<u>42.0</u>	253	42.0	2	<u>203</u>	<u>52.3</u>	204	52.3	203	52.4
454.calculix	2	595	27.7	597	27.6	<u>596</u>	<u>27.7</u>	2	<u>392</u>	<u>42.1</u>	394	41.8	392	42.1
459.GemsFDTD	2	1442	14.7	<u>1445</u>	<u>14.7</u>	1449	14.6	2	<u>1412</u>	<u>15.0</u>	1411	15.0	1413	15.0
465.tonto	2	<u>568</u>	<u>34.7</u>	566	34.7	568	34.6	2	<u>548</u>	<u>35.9</u>	548	35.9	550	35.8
470.lbm	2	1997	13.8	<u>1996</u>	<u>13.8</u>	1996	13.8	2	2024	13.6	2021	13.6	<u>2024</u>	<u>13.6</u>
481.wrf	2	776	28.8	<u>780</u>	<u>28.6</u>	781	28.6	2	776	28.8	<u>780</u>	<u>28.6</u>	781	28.6
482.sphinx3	2	<u>1251</u>	<u>31.2</u>	1252	31.1	1247	31.3	2	<u>1230</u>	<u>31.7</u>	1229	31.7	1232	31.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:
icl -Qstd=c99

C++ benchmarks:
icl

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qstd=c99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 27.4

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECfp_rate_base2006 = 26.0

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.deall: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

```

C benchmarks:
  -fast -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:
  -fast -Qauto-ilp32 -Qcxx_features /F1000000000 shlw64m.lib
  -link /FORCE:MULTIPLE

Fortran benchmarks:
  -fast -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
  -fast -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

```

Peak Compiler Invocation

```

C benchmarks:
  icl -Qstd=c99

C++ benchmarks:
  icl

Fortran benchmarks:
  ifort

Benchmarks using both Fortran and C:
  icl -Qstd=c99 ifort

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 27.4

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECfp_rate_base2006 = 26.0

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Oa /F1000000000 -link /FORCE:MULTIPLE

470.lbm: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Qscalar-rep- -Qprefetch /F1000000000
-link /FORCE:MULTIPLE

482.sphinx3: -fast -Qauto-ilp32 -Qunroll2 /F1000000000
-link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Oa -Qcxx_features /F1000000000 shlw64m.lib
-link /FORCE:MULTIPLE

447.dealII: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Qprefetch -Qcxx_features /F1000000000
shlw64m.lib -link /FORCE:MULTIPLE

450.soplex: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qcxx_features /F1000000000 shlw64m.lib
-link /FORCE:MULTIPLE

453.povray: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll4 -Qansi-alias -Qcxx_features /F1000000000
shlw64m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000
-link /FORCE:MULTIPLE

434.zeusmp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qprec-div-
-Qunroll10 -Qscalar-rep- /F1000000000
-link /FORCE:MULTIPLE

437.leslie3d: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qprefetch /F1000000000 -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 27.4

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECfp_rate_base2006 = 26.0

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Ob0 -Qprefetch /F1000000000
-link /FORCE:MULTIPLE

465.tonto: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Oa -Qprefetch /F1000000000
-link /FORCE:MULTIPLE

436.cactusADM: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qauto-ilp32
-Qunroll2 -Qprefetch /F1000000000
-link /FORCE:MULTIPLE

454.calculix: -fast -Qauto-ilp32 -Qunroll-aggressive /F1000000000
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:11:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.