



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itautec

## SPECint®\_rate2006 = 111

### Servidor Itautec LX211 (Intel Xeon X5450)

## SPECint\_rate\_base2006 = 99.4

CPU2006 license: 9001


Test sponsor: Itautec

Tested by: Itautec

Test date: May-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

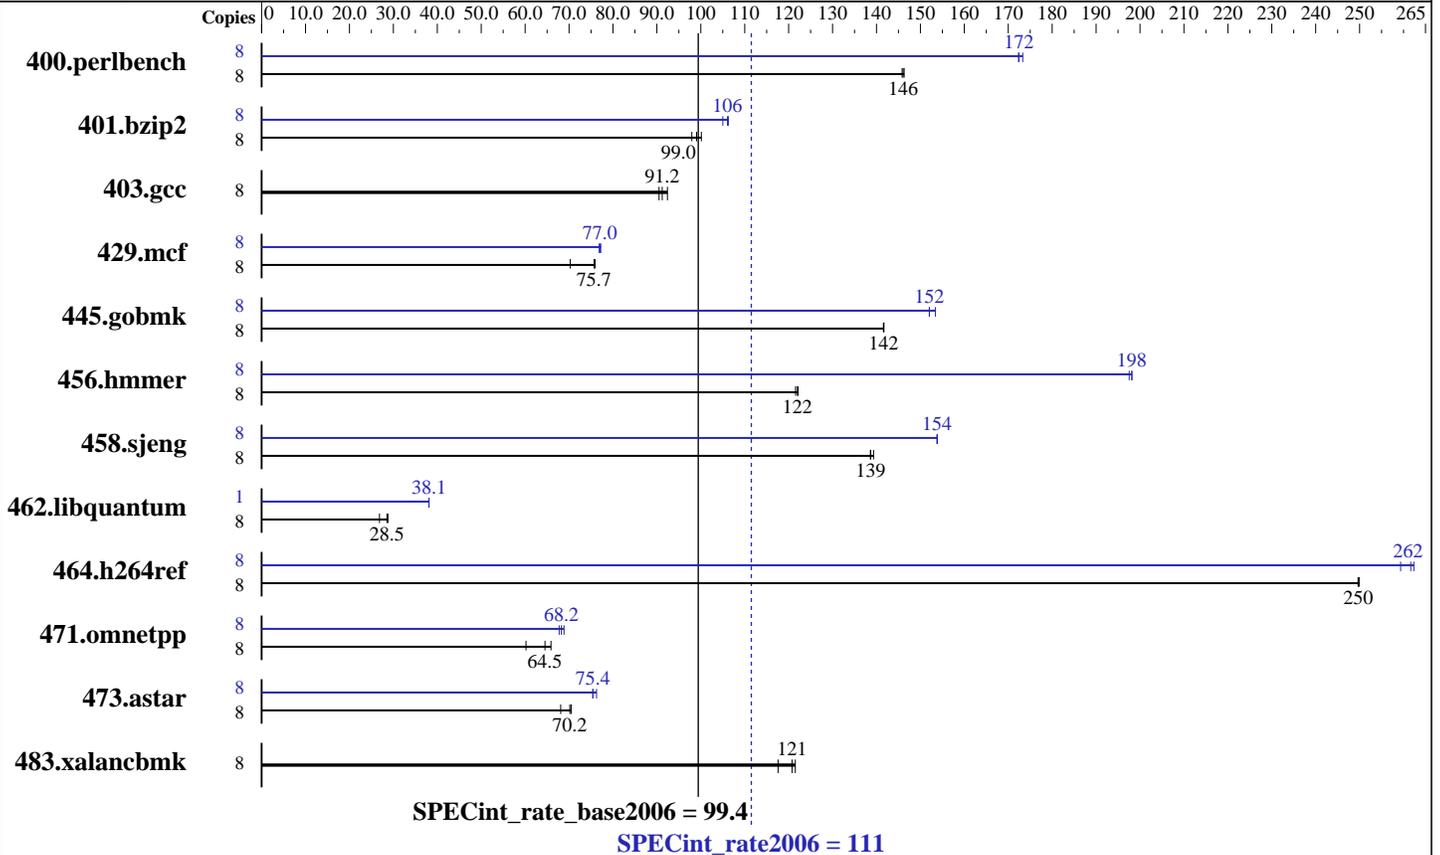

### Hardware

CPU Name: Intel Xeon X5450  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 12 GB (6 \* 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)  
 Disk Subsystem: 1 x SCSI, 73GB, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l\_cc\_p\_10.1.012  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.10.50  
 MicroQuill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 111

Servidor Itaotec LX211 (Intel Xeon X5450)

SPECint\_rate\_base2006 = 99.4

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>535</b>	<b>146</b>	534	146	536	146	8	454	172	451	173	<b>453</b>	<b>172</b>
401.bzip2	8	788	97.9	<b>780</b>	<b>99.0</b>	771	100	8	735	105	<b>728</b>	<b>106</b>	726	106
403.gcc	8	712	90.5	<b>706</b>	<b>91.2</b>	697	92.4	8	712	90.5	<b>706</b>	<b>91.2</b>	697	92.4
429.mcf	8	1038	70.3	<b>964</b>	<b>75.7</b>	961	75.9	8	945	77.2	<b>947</b>	<b>77.0</b>	949	76.9
445.gobmk	8	593	142	592	142	<b>593</b>	<b>142</b>	8	547	153	552	152	<b>552</b>	<b>152</b>
456.hammer	8	614	122	<b>612</b>	<b>122</b>	611	122	8	378	198	377	198	<b>377</b>	<b>198</b>
458.sjeng	8	698	139	<b>698</b>	<b>139</b>	695	139	8	629	154	629	154	<b>629</b>	<b>154</b>
462.libquantum	8	6176	26.8	<b>5809</b>	<b>28.5</b>	5763	28.8	1	<b>544</b>	<b>38.1</b>	544	38.1	544	38.1
464.h264ref	8	709	250	<b>709</b>	<b>250</b>	708	250	8	683	259	675	262	<b>677</b>	<b>262</b>
471.omnetpp	8	831	60.2	<b>775</b>	<b>64.5</b>	759	65.9	8	726	68.9	<b>733</b>	<b>68.2</b>	738	67.8
473.astar	8	825	68.1	<b>800</b>	<b>70.2</b>	797	70.5	8	736	76.3	745	75.4	<b>744</b>	<b>75.4</b>
483.xalancbmk	8	469	118	<b>457</b>	<b>121</b>	454	122	8	469	118	<b>457</b>	<b>121</b>	454	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 462.libquantum at peak.

## Platform Notes

BIOS configuration:  
Hardware Prefetch Disabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 111

Servidor Itautec LX211 (Intel Xeon X5450)

SPECint\_rate\_base2006 = 99.4

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3  
C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
401.bzip2: /opt/intel/cce/10.1.012/bin/icc  
-L/opt/intel/cce/10.1.012/lib  
-I/opt/intel/cce/10.1.012/include  
456.hmmer: /opt/intel/cce/10.1.012/bin/icc  
-L/opt/intel/cce/10.1.012/lib  
-I/opt/intel/cce/10.1.012/include  
C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 111

Servidor Itautec LX211 (Intel Xeon X5450)

SPECint\_rate\_base2006 = 99.4

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/sh/SmartHeap\_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/sh/SmartHeap\_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 111

Servidor Itautec LX211 (Intel Xeon X5450)

SPECint\_rate\_base2006 = 99.4

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 16:58:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 May 2008.