



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECint\_rate2006 = 104**

Servidor Itautec MX201 (Intel Xeon E5405)

**SPECint\_rate\_base2006 = 85.7**

CPU2006 license: 9001


Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

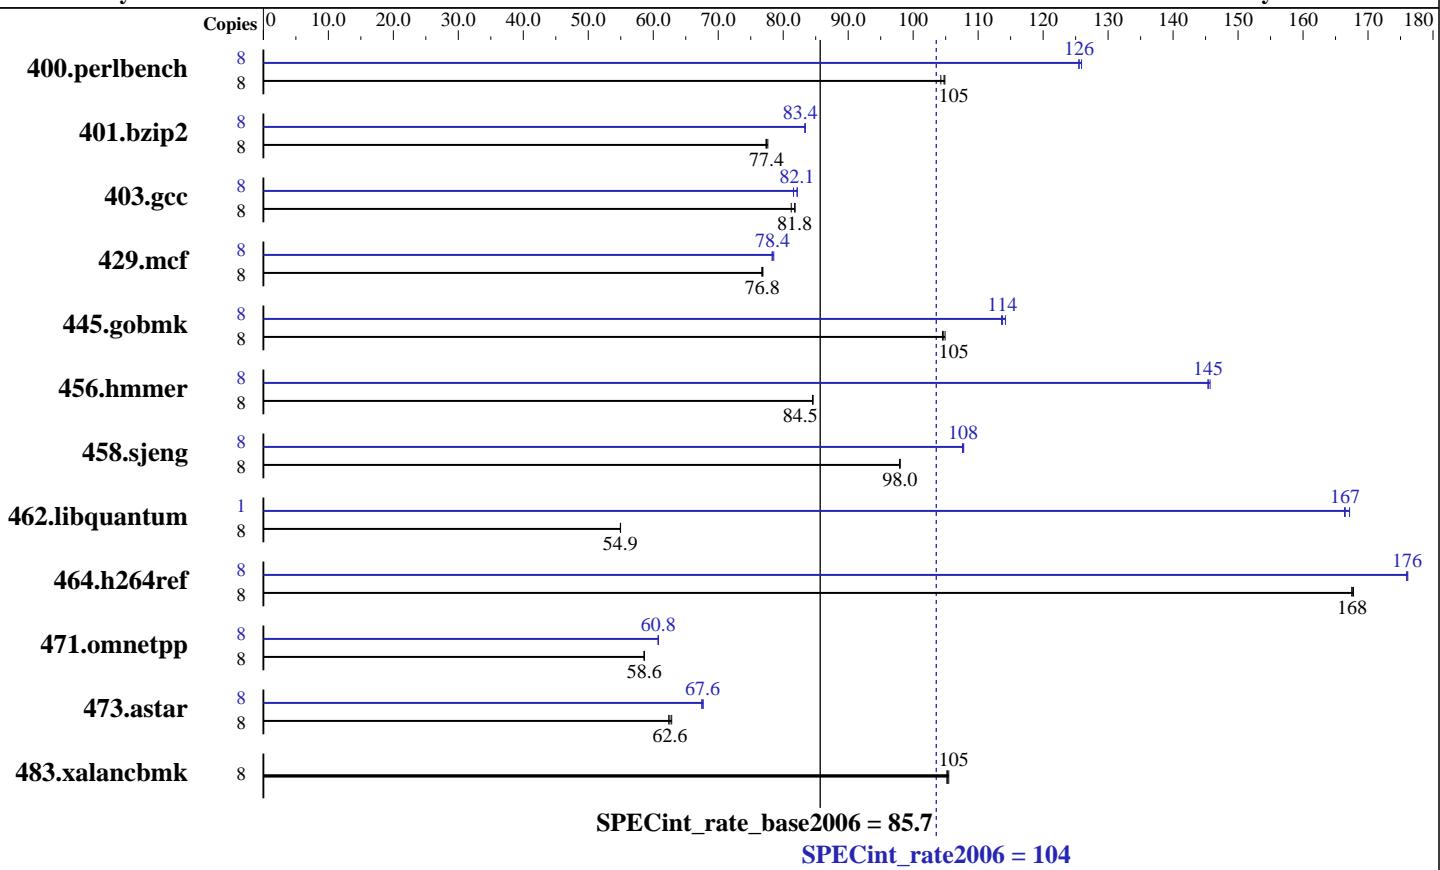

## Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem:	1 x SCSI, 73GB, 15000 RPM
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run Level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.17.10.50 MicroQuill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

**SPECint\_rate2006 = 104**

Servidor Itautec MX201 (Intel Xeon E5405)

**SPECint\_rate\_base2006 = 85.7**

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>746</b>	<b>105</b>	750	104	745	105	8	621	126	<b>623</b>	<b>126</b>	623	125
401.bzip2	8	998	77.4	994	77.6	<b>997</b>	<b>77.4</b>	8	<b>926</b>	<b>83.4</b>	926	83.4	926	83.4
403.gcc	8	793	81.2	<b>788</b>	<b>81.8</b>	787	81.8	8	784	82.2	789	81.6	<b>784</b>	<b>82.1</b>
429.mcf	8	<b>950</b>	<b>76.8</b>	951	76.7	949	76.9	8	932	78.3	929	78.5	<b>931</b>	<b>78.4</b>
445.gobmk	8	800	105	803	105	<b>802</b>	<b>105</b>	8	735	114	<b>738</b>	<b>114</b>	739	114
456.hammer	8	883	84.5	882	84.6	<b>883</b>	<b>84.5</b>	8	<b>513</b>	<b>145</b>	513	145	512	146
458.sjeng	8	988	98.0	989	97.9	<b>988</b>	<b>98.0</b>	8	900	108	898	108	<b>899</b>	<b>108</b>
462.libquantum	8	3017	54.9	3015	55.0	<b>3017</b>	<b>54.9</b>	1	124	167	<b>124</b>	<b>167</b>	125	166
464.h264ref	8	<b>1056</b>	<b>168</b>	1057	167	1055	168	8	1005	176	<b>1006</b>	<b>176</b>	1006	176
471.omnetpp	8	853	58.6	<b>853</b>	<b>58.6</b>	853	58.6	8	823	60.8	<b>823</b>	<b>60.8</b>	823	60.8
473.astar	8	894	62.8	<b>898</b>	<b>62.6</b>	900	62.4	8	<b>831</b>	<b>67.6</b>	830	67.7	833	67.5
483.xalancbmk	8	525	105	<b>524</b>	<b>105</b>	523	105	8	525	105	<b>524</b>	<b>105</b>	523	105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 462.libquantum at peak.

## Platform Notes

BIOS configuration:  
Hardware Prefetch Enabled

## General Notes

This result was measured on the Servidor Itautec MX201.  
The Servidor Itautec MX201 and the Servidor Itautec MX221 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon E5405)

**SPECint\_rate2006 = 104**

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: May-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc  
-L/opt/intel/cce/10.1.012/lib  
-I/opt/intel/cce/10.1.012/include

456.hmmr: /opt/intel/cce/10.1.012/bin/icc  
-L/opt/intel/cce/10.1.012/lib  
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint\_rate2006 = 104

Servidor Itaute MX201 (Intel Xeon E5405)

SPECint\_rate\_base2006 = 85.7

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itaute

Hardware Availability: Dec-2007

Tested by: Itaute

Software Availability: Jan-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
403.gcc: -fast -inline-calloc -opt-malloc-options=3  
429.mcf: -fast -prefetch  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias  
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
462.libquantum: -fast -unroll4 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/sh/SmartHeap\_8.1/lib -lsmartheap  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/sh/SmartHeap\_8.1/lib -lsmartheap  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint\_rate2006 = 104

Servidor Itautec MX201 (Intel Xeon E5405)

SPECint\_rate\_base2006 = 85.7

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itautech

Hardware Availability: Dec-2007

Tested by: Itautech

Software Availability: Jan-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 17:29:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 June 2008.